




**L-MATSP-42-H2**  
**MASTER 12W SPOTLIGHT**  
**TIGHT ZOOM 4.5°- 20° NARROW BEAM**  
PRODUCT CUTSHEET

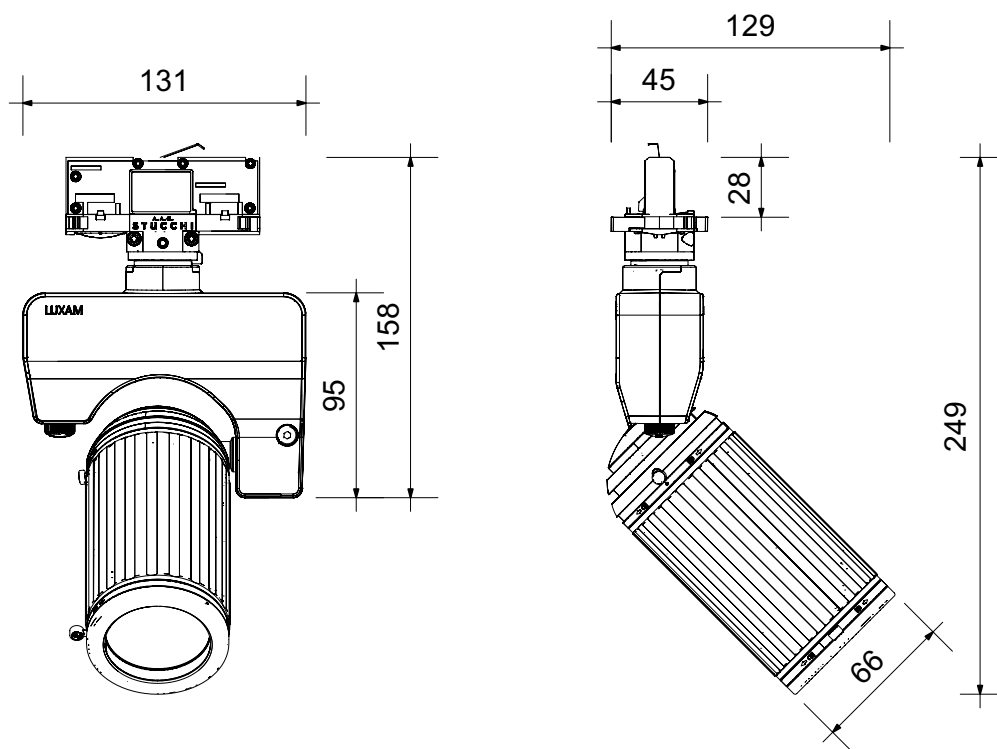

## FEATURES

- Focusable 4.5° - 20°
- Fully dimmable with onboard dimmer
- Full range of accessories including Barndoors, Snoots, Filter frames & more
- Compatible with Stucchi, Global, and Eutrac
- No tools are needed for mounting and focusing the fixtures.

## AVAILABLE ACCESSORIES

- Gobo holder



**L-MAAS-40**  
ANGLED SNOOT



**L-MABD-40**  
BARNDOOR



**L-COZ-40**  
CACHE

## TECHNICAL DATA

|                                       |                                    |                                |                            |
|---------------------------------------|------------------------------------|--------------------------------|----------------------------|
| <b>Voltage</b>                        | 100-240VAC                         | <b>Main Material</b>           | Aluminum                   |
| <b>LED Wattage</b>                    | 12.8W                              | <b>Color Finishing</b>         | Black, White and Silver    |
| <b>Wattage Once Used</b>              | 17W                                | <b>Working Temperature</b>     | recommended 10°C to 25°C * |
| <b>Input Current</b>                  | 73mA                               | <b>Storage Temperature</b>     | recommended 22°C           |
| <b>Beam Angles</b>                    | Zoomable 4.5° - 20°                | <b>Certificates / Standard</b> | UL, CE                     |
| <b>Pan / Tilt</b>                     | 355°/180°                          | <b>Warranty</b>                | 5 years                    |
| <b>Luminous Efficiency of the LED</b> | 103lm/W                            | <b>Lifespan</b>                | 50 000 hours               |
| <b>Color Temperatures</b>             | 2700K, 3000K, 3500K, 4000K, 5000K  | <b>Lens</b>                    | Glass                      |
| <b>Adapter</b>                        | Eutrac, Stucchi, Global            | <b>LED</b>                     | COB                        |
| <b>Dimmable Options</b>               | On board Dimmer: PWM, range 0-100% | <b>Class</b>                   | III, Indoor use only       |
| <b>CRI</b>                            | 97 min                             | <b>Rating</b>                  | IP30                       |
| <b>Weight</b>                         | 1015g                              | <b>Dimensions</b>              | 131*95*215 (mm)            |

PHOTOMETRICS


**4.5°**

| Distance |           | Diameter |
|----------|-----------|----------|
| 2m       | 4.635 lux | Ø15cm    |
| 3m       | 2.060 lux | Ø24cm    |
| 5m       | 742 lux   | Ø39cm    |
| 7m       | 378 lux   | Ø55cm    |
| 9m       | 229 lux   | Ø71cm    |

**20°**

| Distance |         | Diameter |
|----------|---------|----------|
| 2m       | 900 lux | Ø65cm    |
| 3m       | 400 lux | Ø95.0cm  |
| 5m       | 144 lux | Ø162.0cm |
| 7m       | 73 lux  | Ø227cm   |

12.8W Spotlights can transform into Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights - with one body you can have either a spotlight or a framing shutter spotlight.

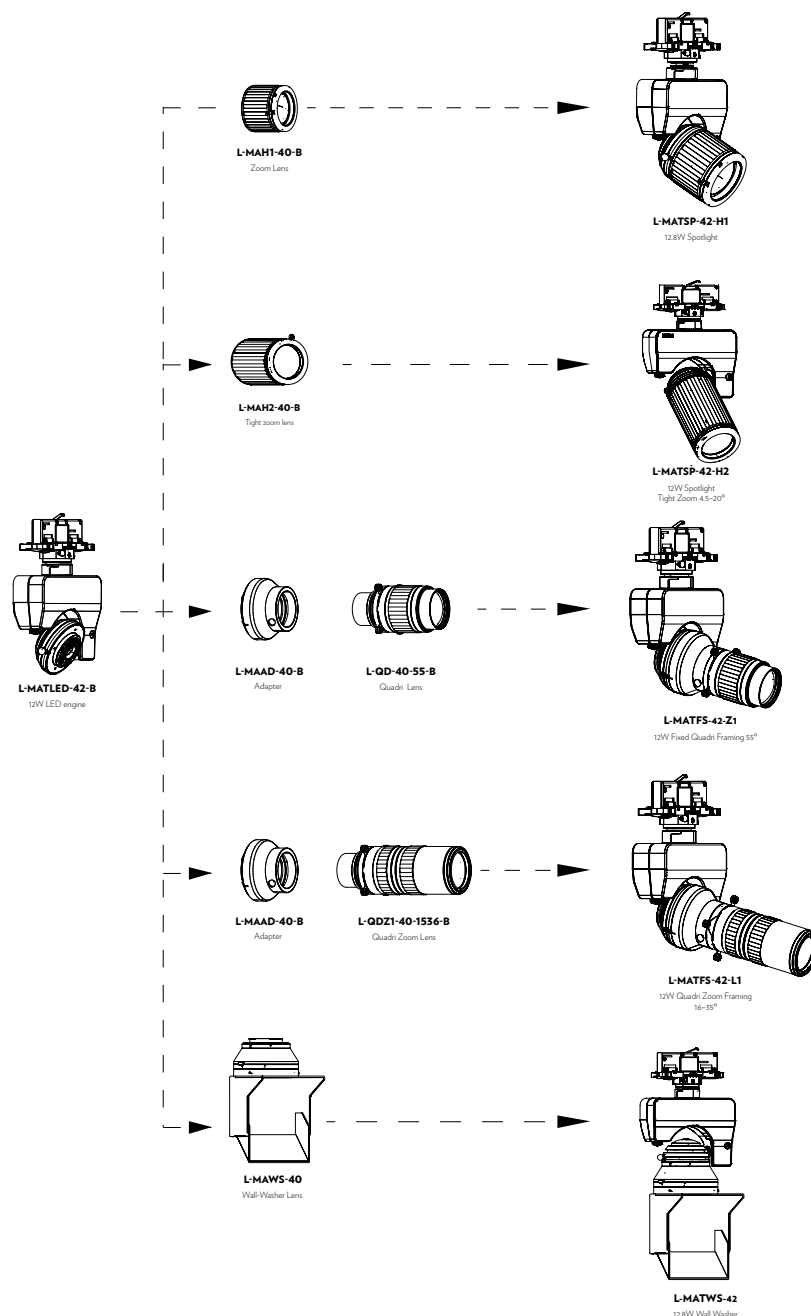

**TRACKS COMPATIBLE**

Global Track

Stucchi

Eutrac