

# INSTRUCTION MANUAL

## L-CT-DMX-RDM-6W-6CH / 6 Channels dimming Box DMX/RDM/Manual 6W

### L-CT-DMX-RDM-6W-6CH

- Input voltage : 85-305 VAC
- Max output power : 36W (1\*6W standalone / channel)
- Output Voltage: 3-21V
- Output Current: 160mA (6W)
- Number of Channel: 6
- Dimming method : Manual (6 trimmers) / DMX (address selection by switches)/ DMX RDM
- Dimensions : L210\*W96\*H68
- Weight: 615 gr
- Rate case: IP20



**IMPORTANT :** Always use with Luxam fixtures L-MSPS-20 .

### IMPORTANT SAFETY INSTRUCTIONS


When installing or using this device, basic safety precautions should always be followed, including the following:

- 1) Read all instructions.
- 2) Do not install this device in damp or wet locations.
- 3) Do not open.
- 4) Respect the output maximum current and maximum power load.

SAVE THESE INSTRUCTIONS

# INSTRUCTION MANUAL

## L-CT-DMX-RDM-6W-6CH / 6 Channels dimming Box DMX/RDM/Manual

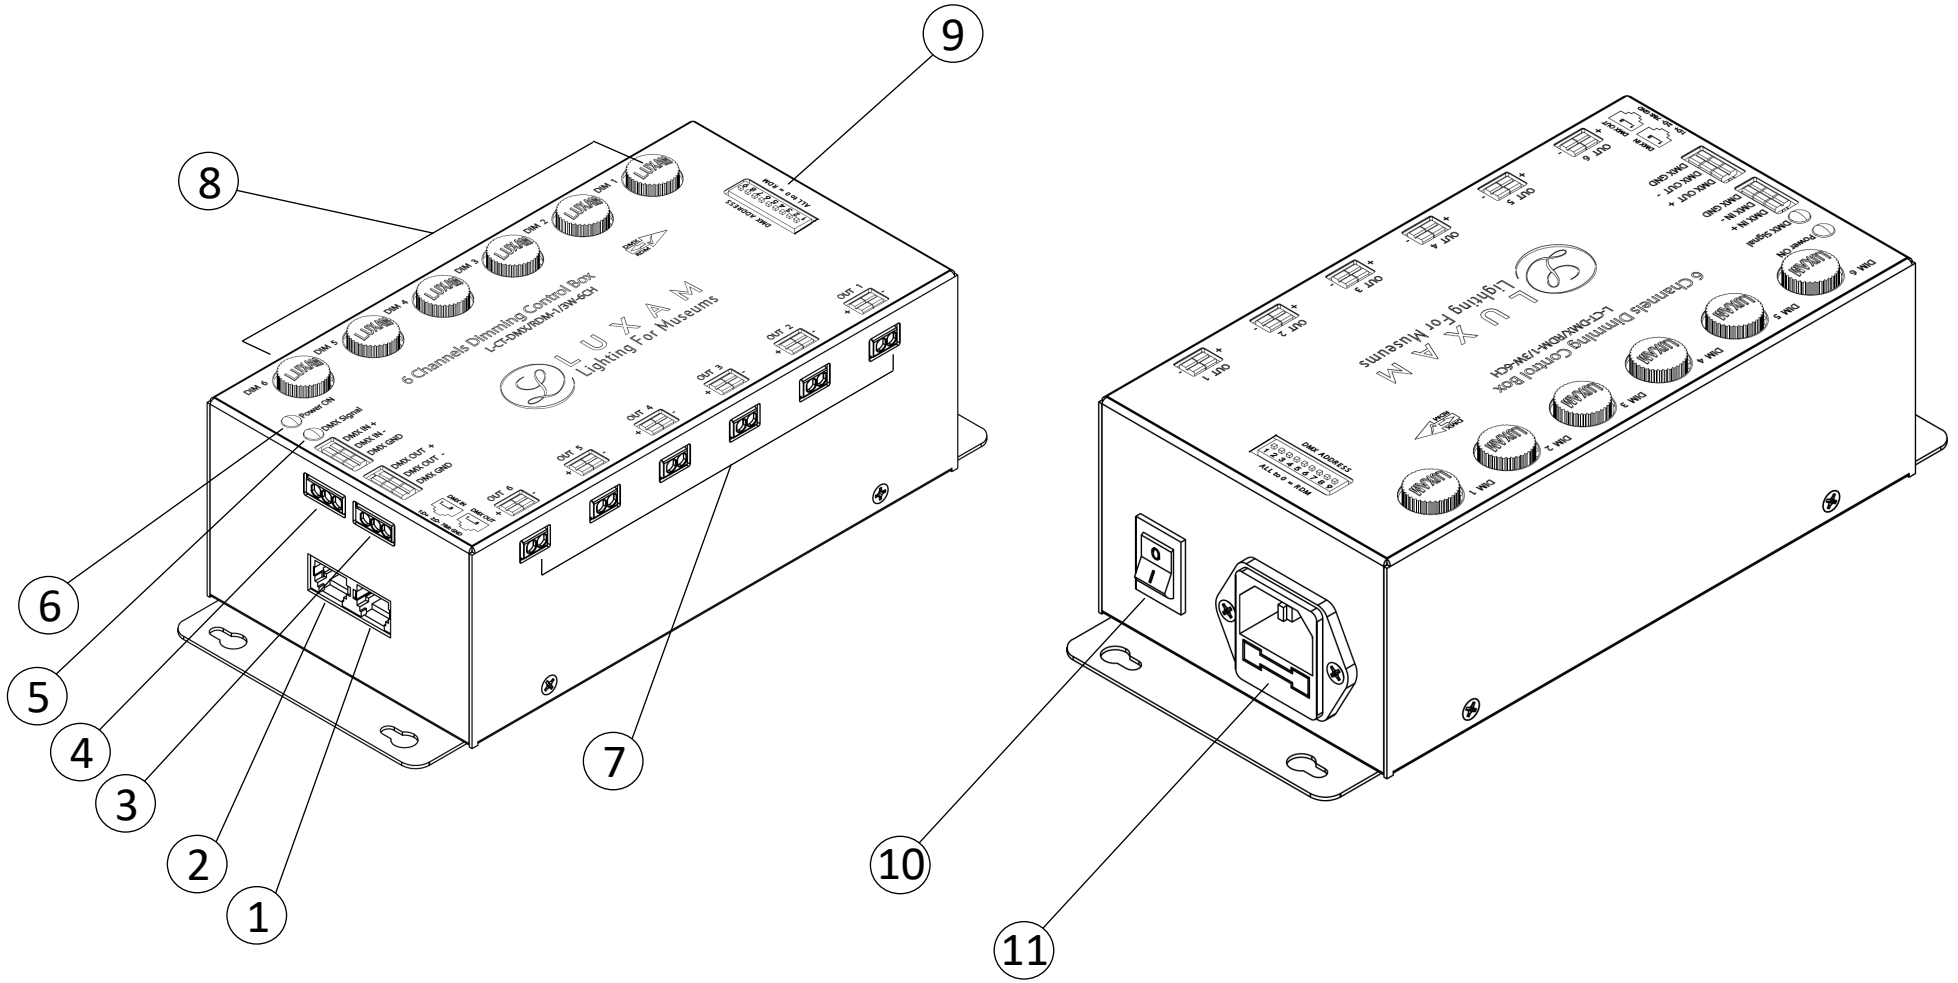

# INSTRUCTION MANUAL

---


L-CT-DMX-RDM-6W-6CH / **6 Channels dimming Box DMX/RDM/Manual**

- 1 DMX out (RJ45 connector)
- 2 DMX in (RJ45 connector)
- 3 DMX out (quick connector)
- 4 DMX in (quick connector)
- 5 DMX signal active
- 6 Power On
- 7 Output Channel 1 to 6 (quick connector)
- 8 Manual dimming potentiometers Channel 1 to 6
- 9 DMX 512 address setting (dip switches)
- 10 Power switch ON/OFF
- 11 Power Connector



# INSTRUCTION MANUAL

L-CT-DMX-RDM-6W-6CH / 6 Channels dimming Box DMX/RDM/Manual

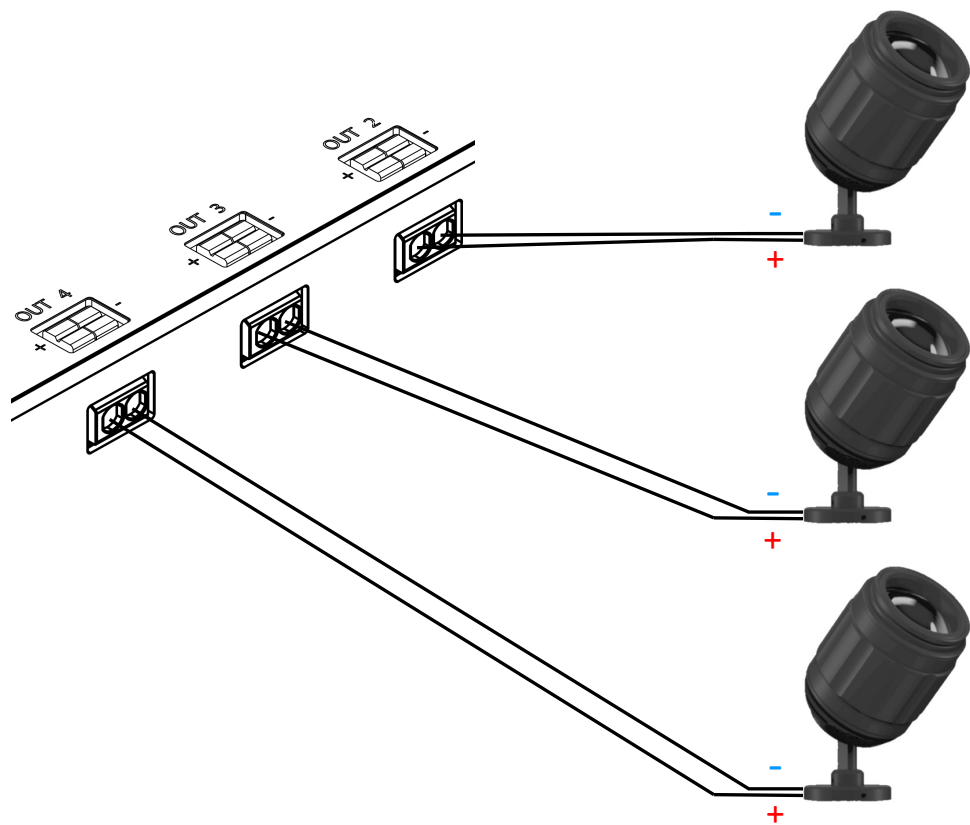


1 \* L-MSPS-20 (6W) only / output

# INSTRUCTION MANUAL

---

L-CT-DMX-RDM-6W-6CH / 6 Channels dimming Box DMX/RDM/Manual

## DMX address selector



- For RDM mode all switches to position 0.
- For DMX mode select address from 1 to 512 with the dip switches.

Switch	1	2	3	4	5	6	7	8	9
Valeur	1	2	4	8	16	32	64	128	256