

Technical Data



L-MSPS-10

LED WATTAGE: 1W	COLOR FINISHING: Black, White and Silver
WATTAGE ONCE USED: 1W	STORAGE TEMPERATURE: recommended 22°C
INPUT CURRENT: 300-350mA Constant Current (connect in series)	CERTIFICATES / STANDARD: UL, CE
BEAM ANGLES: Zoomable 9 to 70°	WARRANTY: 5 years
PAN / TILT: 355° / 90°	DRIVERS COMPATIBLE: Constant Current
LUMINOUS EFFICIENCY OF THE LED: 100lm/W @ RA95 min	LIFESPAN: 50 000 hours
COLOR TEMPERATURES: 3000K, 4000K, 5000K	LENS: Glass
ADAPTER: Surface mount	LED: SMD CERAMIC
DIMMABLE OPTIONS: Dimmable with PWM driver	CLASS: III, Indoor use only
CRI: 95 min	RATING: IP30
WEIGHT: 43g	DIMENSIONS: 52*32*57 (mm)
MAIN MATERIAL: Aluminum	LENGTH OF TAIL: 145cm



L-MSPS-00

VOLTAGE: not to mentionned	COLOR FINISHING: Black, White and Silver
LED WATTAGE: 3W	STORAGE TEMPERATURE: recommended 22°C
WATTAGE ONCE USED: 3W	CERTIFICATES / STANDARD: UL, CE
INPUT CURRENT: 700-1000mA Constant Current (connect in series)	WARRANTY: 5 years
BEAM ANGLES: Zoomable 8° to 56°	DRIVERS COMPATIBLE: Constant Current
PAN / TILT: 355° / 90°	LIFESPAN: 50 000 hours
LUMINOUS EFFICIENCY OF THE LED: 100lm/W @ RA95 min	LENS: Glass
COLOR TEMPERATURES: 3000K, 4000K, 5000K	LED: SMD CERAMIC
ADAPTER: Surface mount	CLASS: III, Indoor use only
DIMMABLE OPTIONS: Dimmable with PWM driver	RATING: IP30
CRI: 95 min	DIMENSIONS: 56*32*62 (mm)
WEIGHT: 81g	LENGTH OF TAIL: 145cm
MAIN MATERIAL: Aluminum	

IMPORTANT SAFETY INSTRUCTIONS

To ensure the safe installation and operation of the Luxam lighting system, follow these guidelines carefully. Failure to comply with these instructions may result in fire, electric shock, damage to the system, or voiding of the warranty.

General Safety Guidelines

1. Power Supply:
 - Disconnect the power supply before starting any installation or maintenance work. Ensure it cannot be reconnected inadvertently during the process.
 - Turn off electrical power before modifying the lighting system.
2. Installation Environment:
 - Do not install the system in wet locations.
 - Do not conceal or extend exposed conductors through a building wall.
3. Ventilation and Mounting:
 - Maintain proper ventilation around the luminaire. Do not place objects on top of it.
 - Keep a clearance of 10-15 cm between the luminaire and adjacent heat sources.
 - Use the standard mounting orientation. Non-standard orientations or high ambient temperatures may increase internal temperatures and require a reduction in output current. Refer to the specification sheet for the optimal mounting position and de-rating curve details.
4. Fire and Overheating Prevention:
 - Ensure all connections are tight to reduce the risk of fire, burns, or overheating.
 - Do not install the lighting system where exposed bare conductors can be shorted or come into contact with conductive materials.
 - Keep all luminaires at least 6 inches (152 mm) away from curtains or other combustible materials.


Fixtures-Specific Instructions

1. Manual Review: Thoroughly review the manual provided before installation. Failure to follow these instructions will void your warranty.
2. Warranty Conditions:
 - Do not attempt to repair or alter the system. This will void the warranty.
 - Always install the products in compliance with local, state, and national codes.
3. Showcase Installation: When installing in showcases, consider the internal temperature of the showcase rather than the ambient temperature. Ensure that minimum air volume, circulation, and conditioning requirements are met.

SAVE THESE INSTRUCTIONS


For more details about installation specifications, safe handling, or operation requirements, please refer to the manufacturer's documentation or contact the support team.

L-MSPS-10

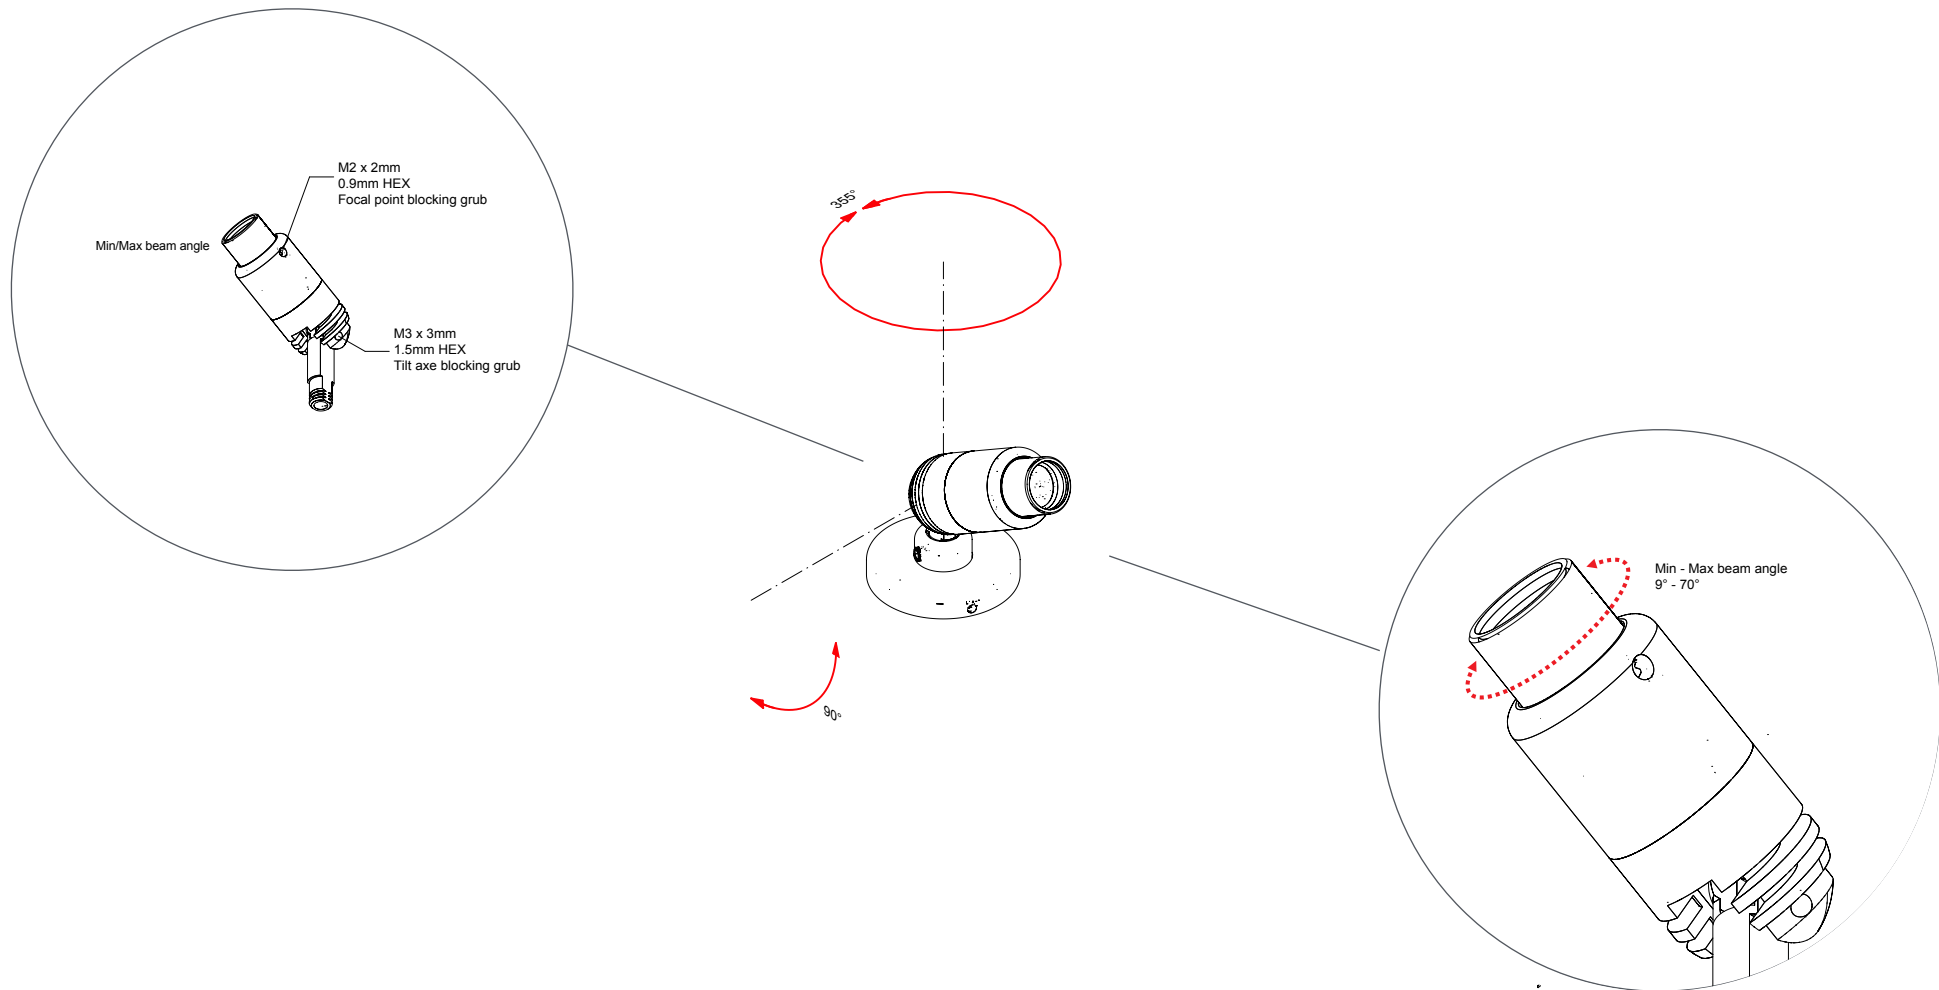


Basic Luminaire Manipulations

L-MSPS-00



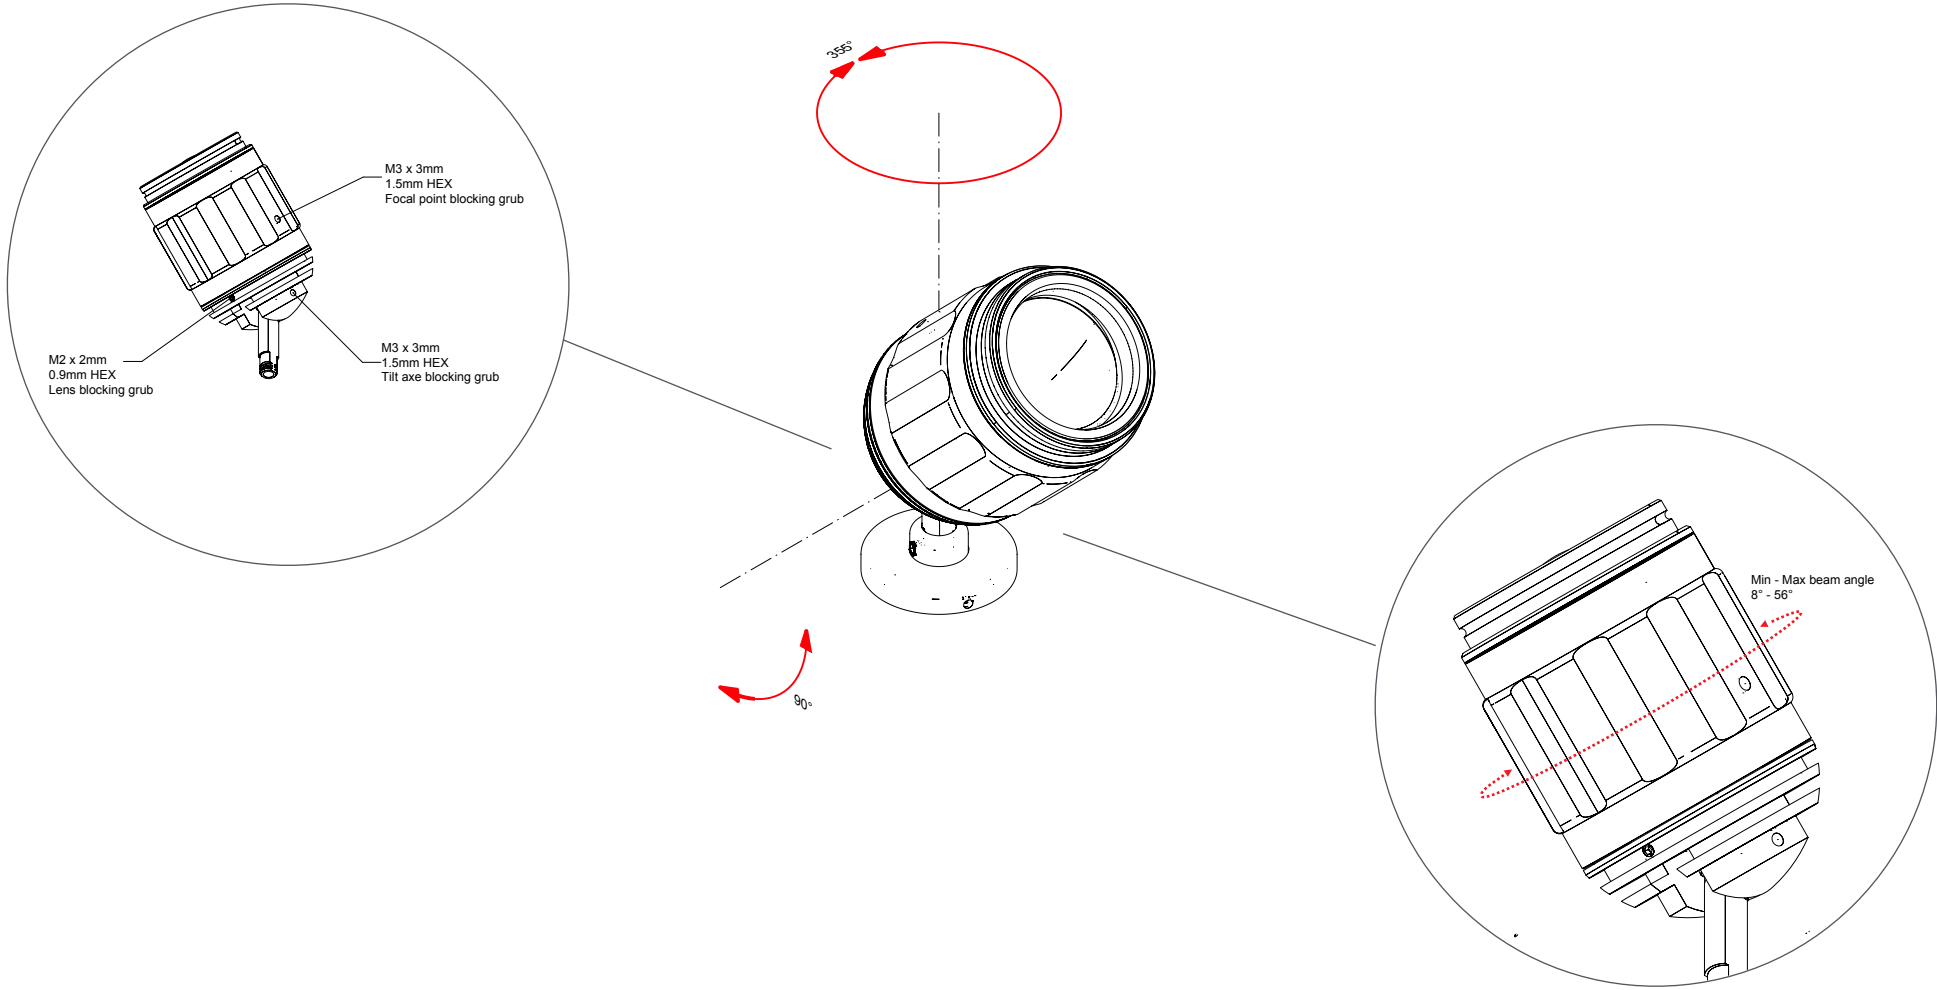


Product Dimensions


L-MSPS-10




L-MSPS-00

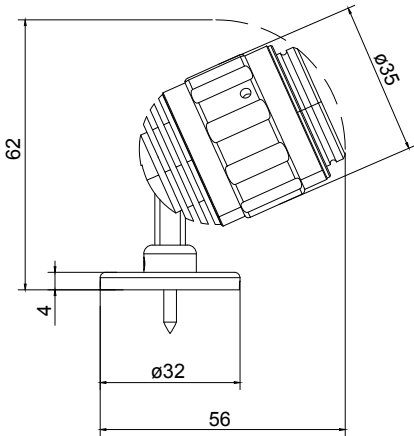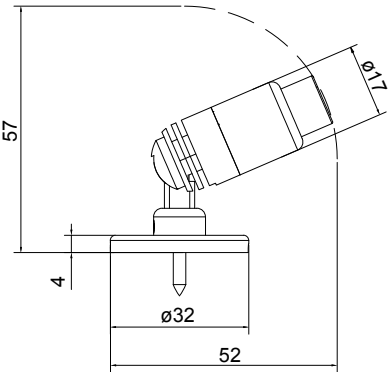


L-MSPS-10

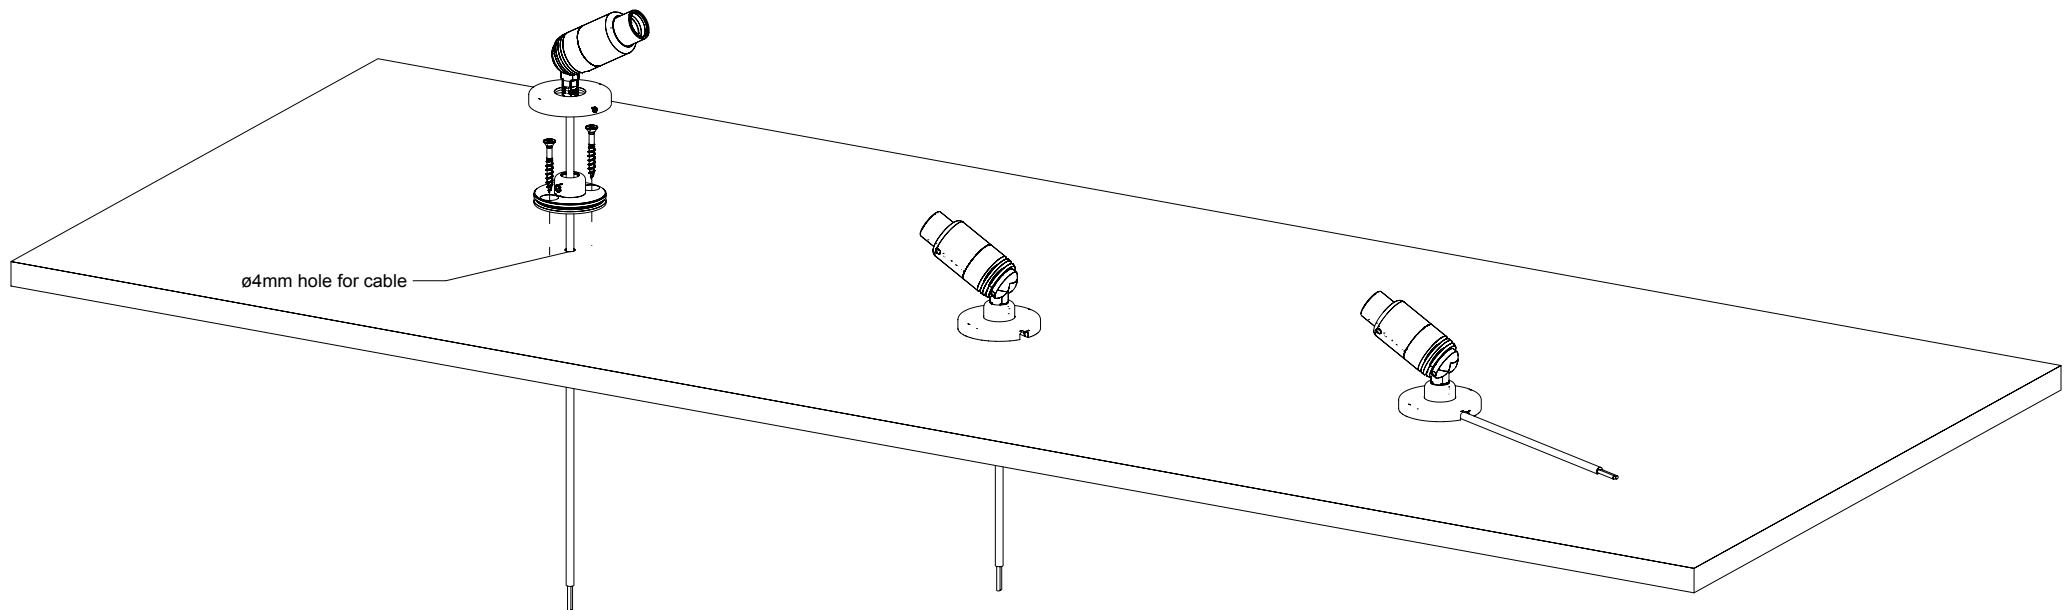

L-MSPS-00

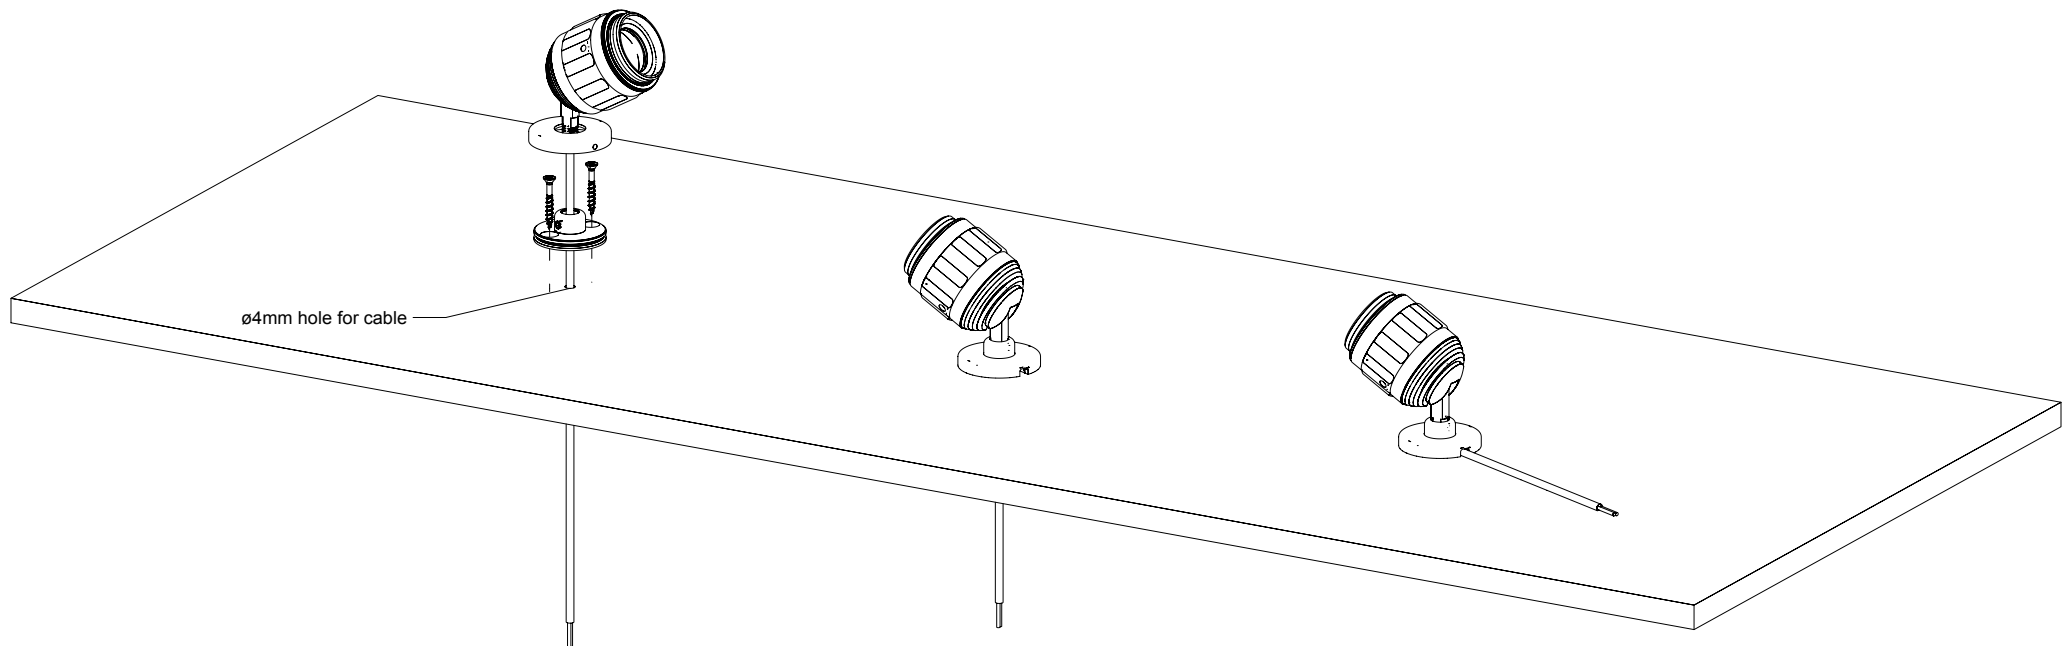


Base Installation

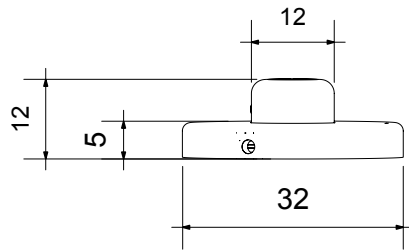


1

Full mount with cover

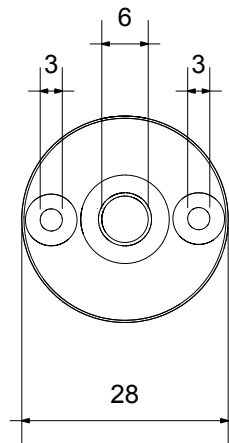

2

Mounting plate with holes

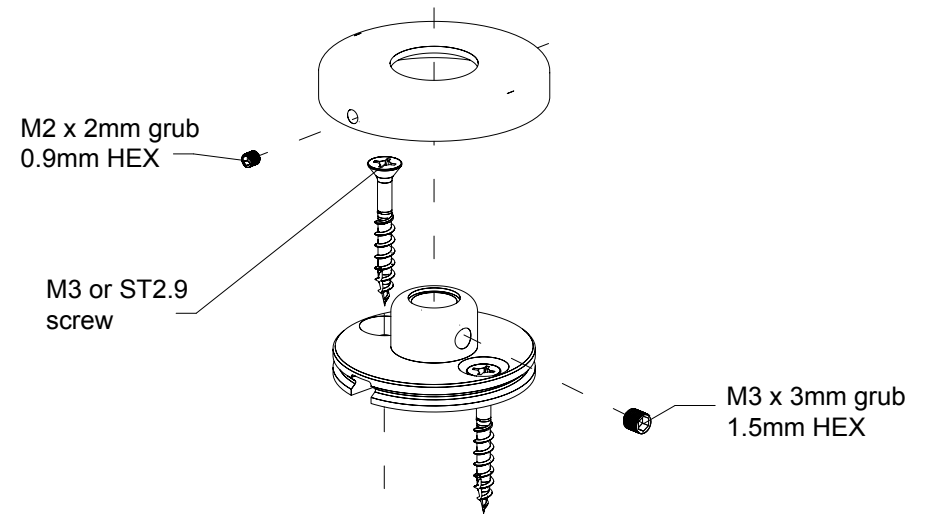


3


Assembly

L-MSPS-10-M and L-MSPS-00-M magnet mount options





L-MSPS-10-M




L-MSPS-00-M



L-MSPS-M

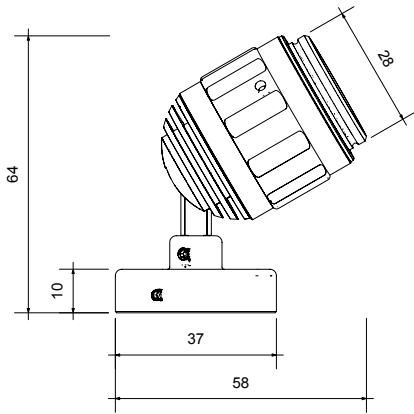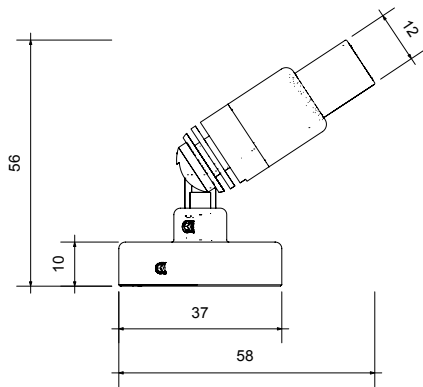


Magnet mount option installation

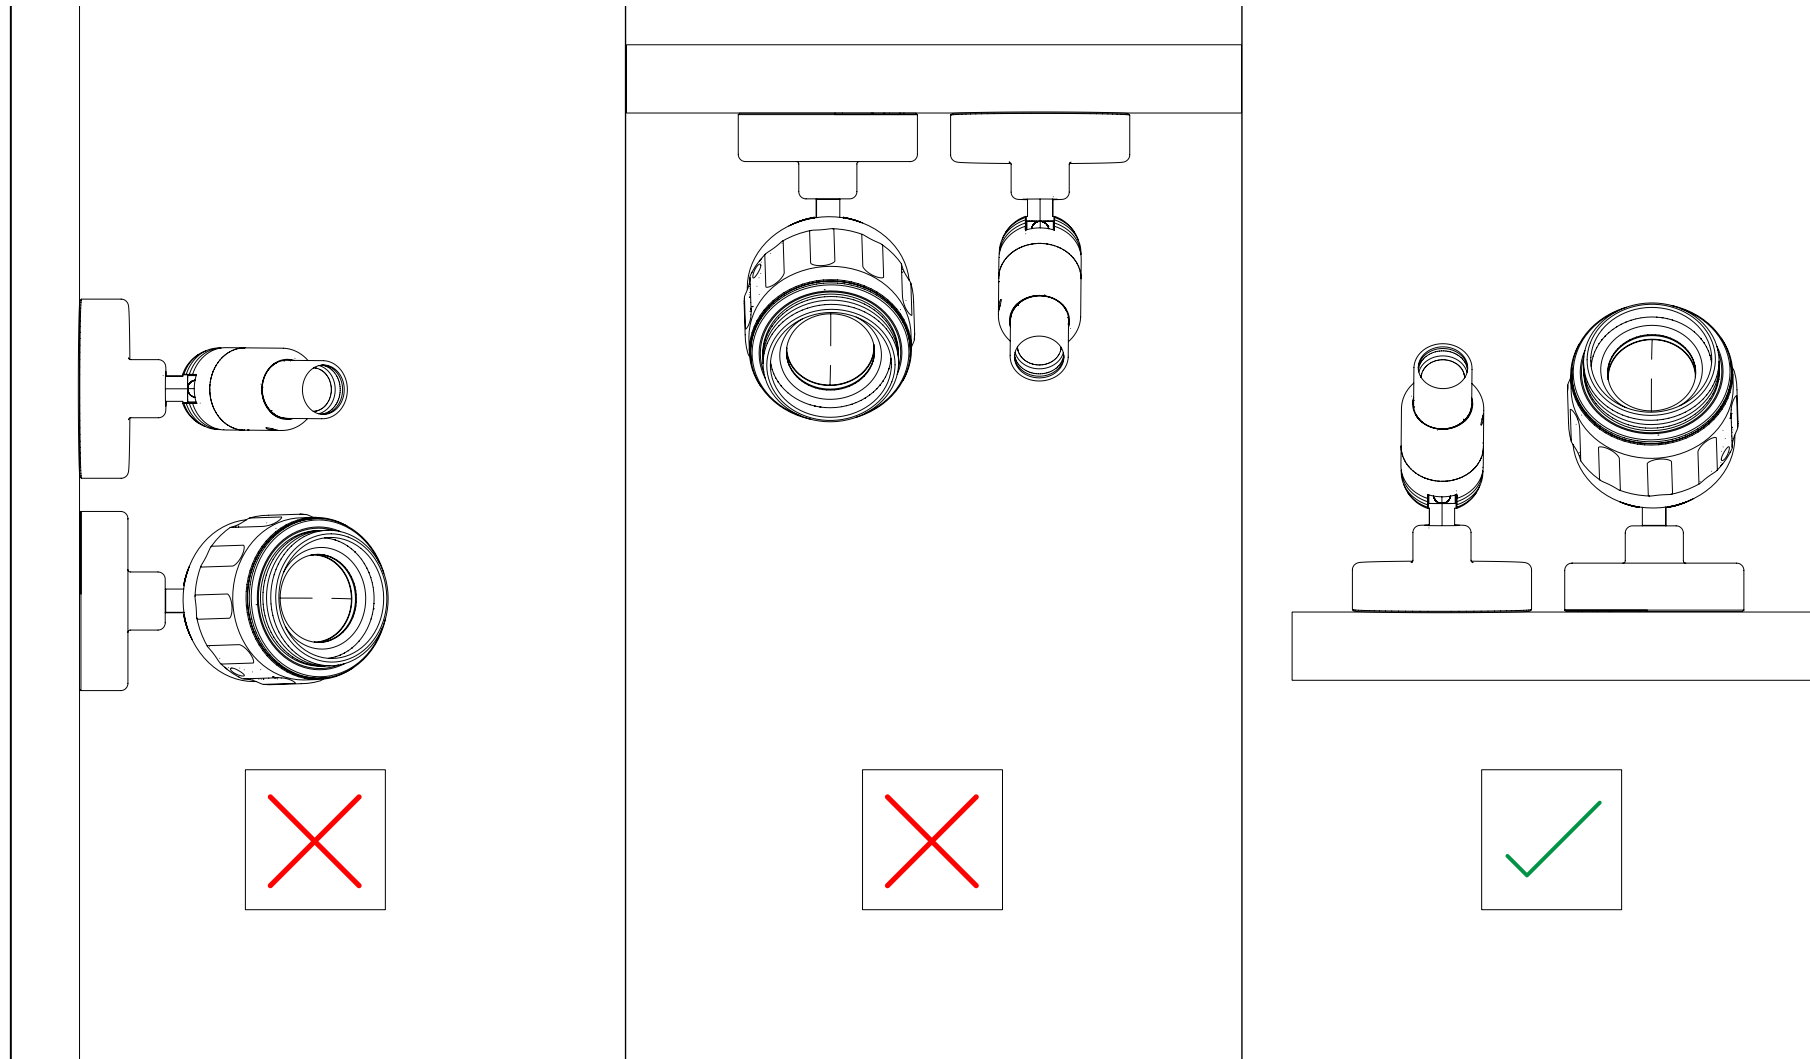

Magnet bases are designed for horizontal surfaces.
For side or suspended mounting of L-MSPS onboard dimming fixtures, we recommend using a screw-in base instead.

Driver Wiring Schema

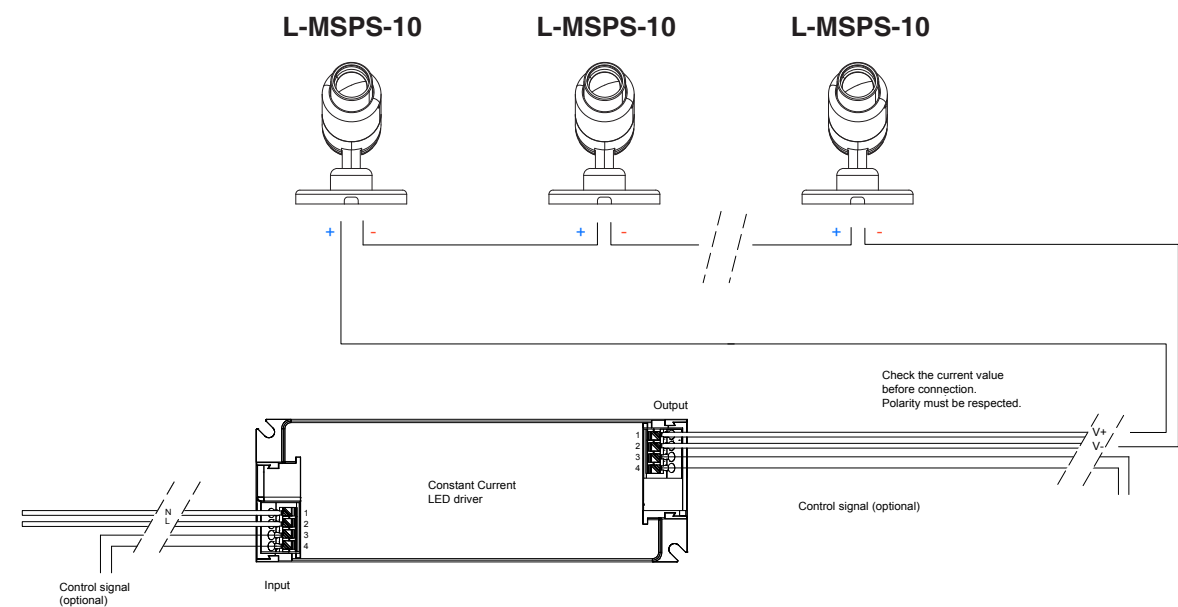


Driver	Short Description	Nbr of Fixtures	Settings
DMX-25-150-900-U1P1	Constant Current driver with DMX control, 25W, 1 channel	3 - 15	300-350mA
AD-36-200-1200-U1P1	Constant Current driver with DMX control, 36W, 1 channel	3 - 15	300-350mA
SE-10-350-700-W1A	Constant Current driver with 0-10V control, 10W, 1 channel	1 - 3	300-350mA
SE-12-350-700-W1A	Constant Current driver with 0-10V control, 12W, 1 channel	3 - 7	300-350mA
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	3 - 12	300-350mA
SE-30-200-800-W1A	Constant Current driver with 0-10V control, 30W, 1 channel	3 - 12	300-350mA
SE-40-300-1050-W1A	Constant Current driver with 0-10V control, 40W, 1 channel	3 - 12	300-350mA
L-CT-DMX/RDM-1-3W-6CH	Constant Current driver with manual/DMX control, 6W x 6 channels*	1 - 6	300-350mA

*To use with 1W L-MSPS-10 spotlights only

IMPORTANT: Always use with UL power unit, with isolated output, 10A maximum.

Driver Wiring Schema

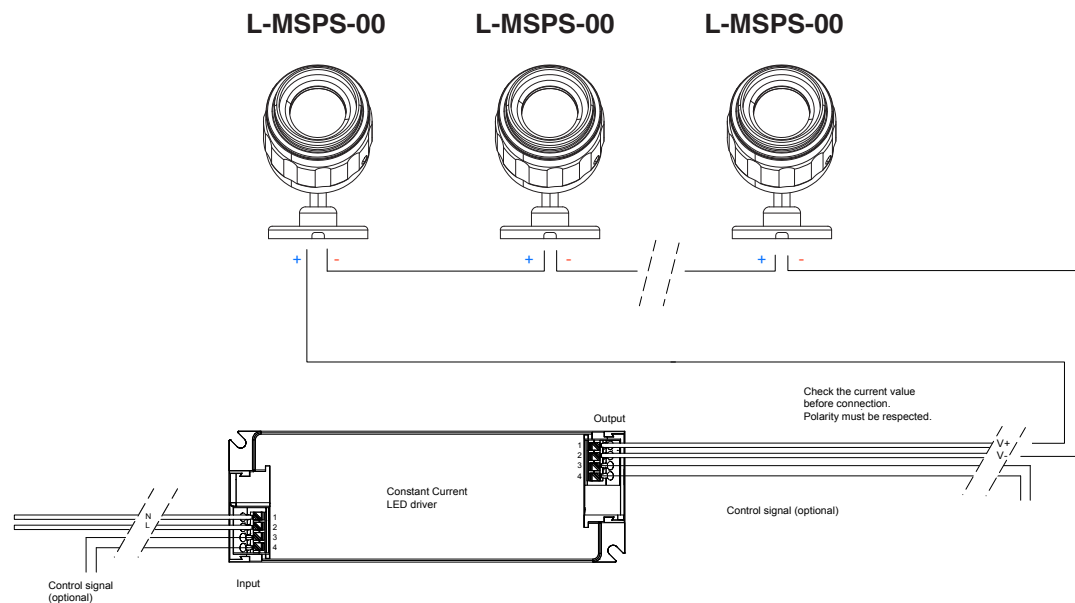

Driver	Short Description	Nbr of Fixtures	Settings
DMX-25-150-900-U1P1*	Constant Current driver with DMX control, 25W, 1 channel	2 - 4	700mA *
AD-36-200-1200-U1P1	Constant Current driver with DMX control, 36W, 1 channel	2 - 10	1000mA
SE-10-350-700-W1A*	Constant Current driver with 0-10V control, 10W, 1 channel	1 - 2	700mA *
SE-12-350-700-W1A*	Constant Current driver with 0-10V control, 12W, 1 channel	2 - 2	700mA *
SE-20-100-700-W1A*	Constant Current driver with 0-10V control, 20W, 1 channel	2 - 3	700mA *
SE-30-200-800-W1A*	Constant Current driver with 0-10V control, 30W, 1 channel	2 - 7	700mA *
SE-40-300-1050-W1A	Constant Current driver with 0-10V control, 40W, 1 channel	2 - 7	1000mA
L-CT-DMX/RDM-1-3W-6CH	Constant Current driver with manual/DMX control, 6W x 6 channels**	1 - 2	700mA*

*At 700mA the fixture operates at a reduced output of 2.1W and does not perform at its optimal level.
**To use with 3W L-MSPS-00 spotlights only

IMPORTANT: Always use with UL power unit, with isolated output, 10A maximum.