




L-MSPS-00
3W STANDALONE HEAD
PRODUCT CUTSHEET



SCAN
FOR WEBSITE

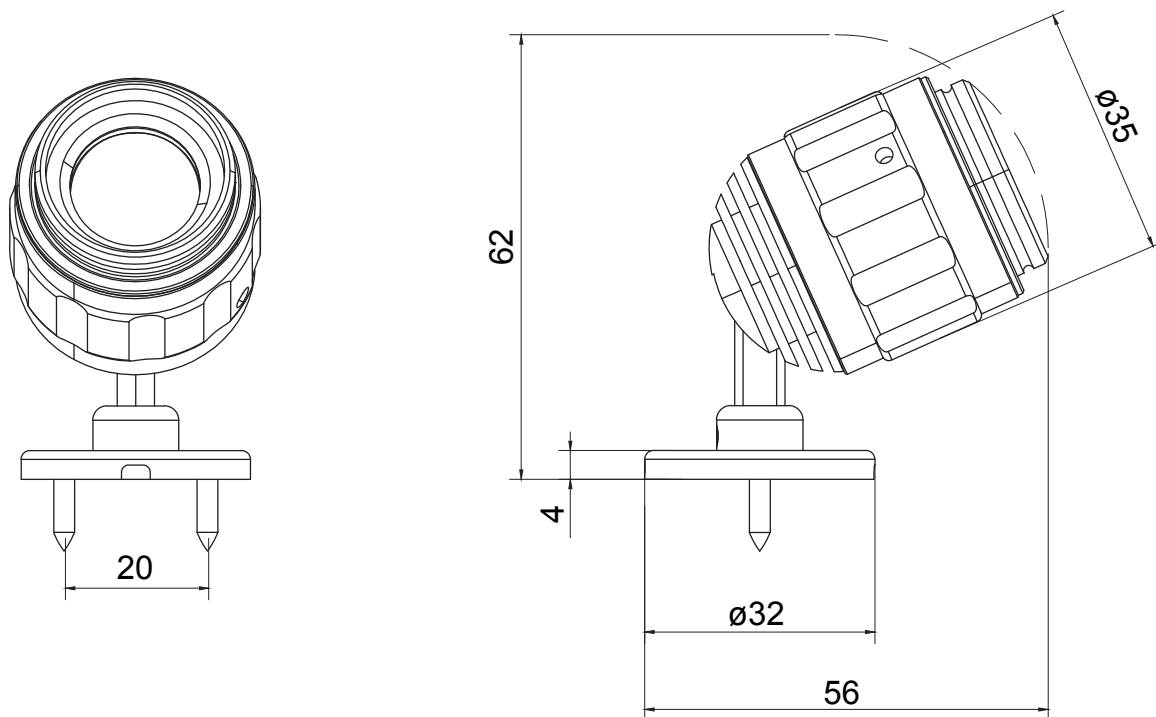

FEATURES

- Fully focusable 8° to 56°
- Can add dimmer to the driver
- Accepts all 3W accessories
- Magnet base option available
- These fixtures need to be wired together in series. Please refer to the dedicated manual for more details.

No tools are needed for focusing the fixtures*

*to lock the rotation axes and focus point 1.5mm and 0.9mm HEX drivers are required.

3W ACCESSORIES



L-MTFH-01
FILTER
HOLDER

L-MTAR-01
ARCHITECTURAL
LENS

L-MTSN-01
SNOOT

L-MTSC-01
CONE SNOOT

L-MTAS-01
ANGLED SNOOT


L-MTBD-01
BARNDOR

L-MTBS-01
BOOSTER

TECHNICAL DATA

Voltage	not to mentioned	Color Finishing	Black, White and Silver
LED Wattage	3W	Storage Temperature	recommended 22°C
Wattage Once Used	3W	Certificates / Standard	UL, CE
Input Current	700-1000mA Constant Current (connect in series)	Warranty	5 years
Beam Angles	Zoomable 8° to 56°	Drivers Compatible	Constant Current
Pan / Tilt	355° / 90°	Lifespan	50 000 hours
Luminous Efficiency of the LED	100lm/W @RA95 min	Lens	Glass
Color Temperatures	3000K, 4000K, 5000K	LED	SMD CERAMIC
Adapter	Surface mount	Class	III, Indoor use only
Dimmable Options	Dimmable with PWM driver	Rating	IP30
CRI	95 min	Dimensions	56*32*62 (mm)
Weight	81g	Lenght Of Tail	145cm
Main Material	Aluminum		

PHOTOMETRICS

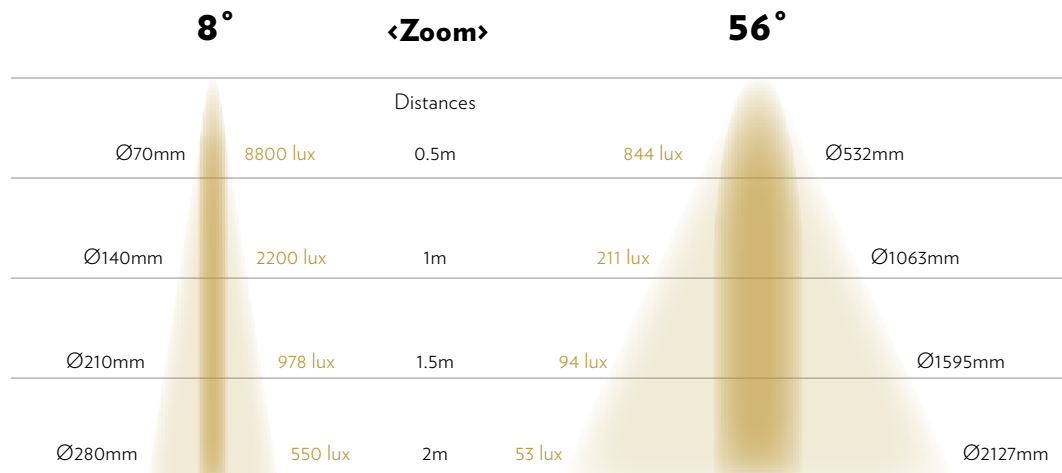

ALL VALUES IN LUX ARE GIVEN FOR A CURRENT OF 1000MA (3W)

DRIVERS

Driver	Short Description	Nbr of Fixtures	Setting
DMX-25-150-900-U1P1*	Constant Current driver with DMX control, 25W, 1 channel	2 - 4	700mA (10-54V) *
AD-36-200-1200-U1P1	Constant Current driver with DMX control, 36W, 1 channel	2 - 10	1000mA (10-54V)
SE-10-350-700-W1A*	Constant Current driver with 0-10V control, 10W, 1 channel	1 - 2	700mA (2-12V) *
SE-12-350-700-W1A*	Constant Current driver with 0-10V control, 12W, 1 channel	2 - 2	700mA (10-24V) *
SE-20-100-700-W1A*	Constant Current driver with 0-10V control, 20W, 1 channel	2 - 3	700mA (9-42V) *
SE-30-200-800-W1A*	Constant Current driver with 0-10V control, 30W, 1 channel	2 - 7	700mA (9-42V) *
SE-40-300-1050-W1A	Constant Current driver with 0-10V control, 40W, 1 channel	2 - 7	1000mA (9-42V)
L-CT-DMX/RDM-1-3W-6CH	Constant Current driver with manual/DMX control, 6W x 6 channels**	1 - 2	1000mA (3-21V)

These fixtures need to be wired together in series. Please refer to the dedicated manual for more details.

* 700mA the fixture operates at a reduced output of 2.1W and does not perform at its optimal level.

** To use with 3W L-MSPS-00 spotlights only

VARIATIONS



L-MTSA-02
3W Standalone
Onboard Dimmer



L-MTSP-02
L-MTSP-02 with
onboard dimmer



L-MTSP-01-ND
3W Spotlight
No dimmer

Please check product cut sheets for details - driver indications vary per product.