LUXAM
LIGHTING FOR MUSEUMS

L-MSPS-20
6W SPOTLIGHT

PRODUCT CUTSHEET

SCAN
FOR WEBSITE

PRODUCT CUTSHEET
L-MSPS-20 | 6W SPOTLIGHT

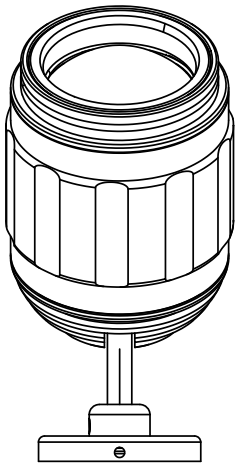

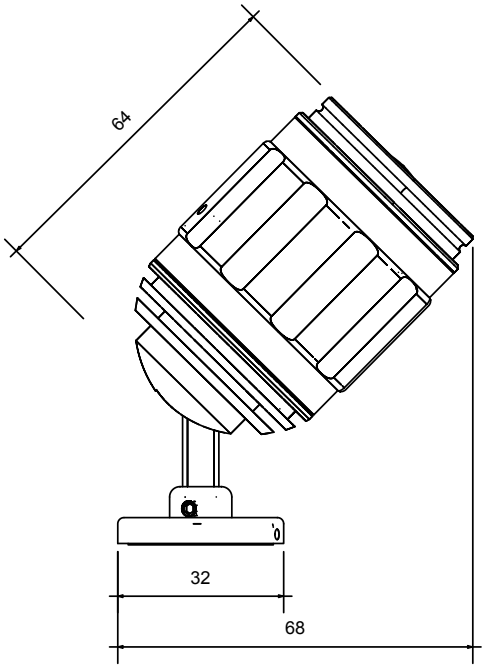

FEATURES

- Focusable from 8° to 55°
- Optional dimmer can be added to driver
- Compatibility with all 6W accessories
- Optional magnetic base

No tools are needed for mounting and focusing the fixtures*

*to lock the rotation axes and focus point 1.5mm and 0.9mm HEX drivers are required.

6W ACCESSORIES

L-MTAS-20
ANGLED SNOOT

L-MTBD-20
BARNDOOR

L-MTFH-20
FILTER HOLDER

L-MTAR-20
ARCHITECTURAL LENSE

LUXAM USA
12201 NW 35 Ste #534
Coral Springs, FL 33065
954 755 7254 | info@luxam.com

LUXAM FRANCE
80 rue du Dessous des Berges
75013 Paris
+33 982 272 946 | france@luxam.com

LUXAM GERMANY
Metzgerfeldweg 21
85737 Ismaning
+498951999651 | germany@luxam.com

LUXAM UK
184 Park Avenue
London NW10 7XL
info@luxam.com

TECHNICAL DATA

Led Wattage	6W	**Color Finishing**	Black, White and Silver
Wattage Once Used	6W	**Storage Temperature**	Recommended 22°C
Input Current	165mA	**Certificates / Standard**	UL, CE
Beam Angles	Zoomable 8° to 55°	**Warranty**	5 years
Pan / Tilt	355° / 90°	**Drivers Compatible**	Constant Current
Luminous Efficiency of the LED	100lm/W @RA97 min	**Lifespan**	50 000 hours
Color Temperatures	3000K, 4000K, 5000K	**Lens**	Glass
Adapter	Surface mount	**LED**	SMD CERAMIC
Dimmable Options	Dimmable with PWM driver	**Class**	III, Indoor use only
CRI	97 min	**Rating**	IP30
Weight	172g	**Dimensions**	75*45*92 (mm)
Main Material	Aluminum	**Length of Tail**	145cm

PHOTOMETRICS

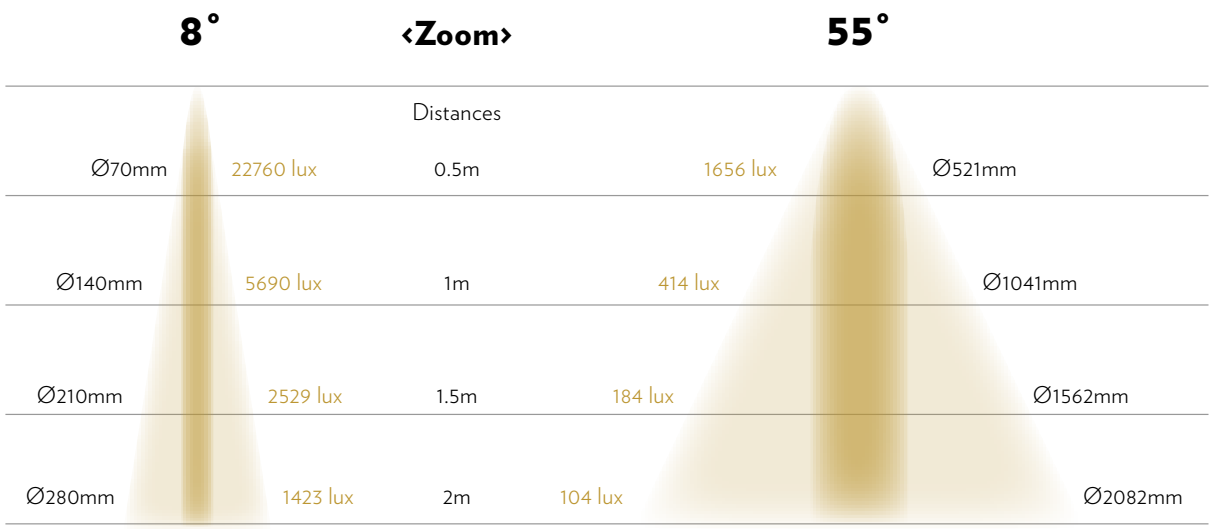

6W Spotlights transforms seamlessly between Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights. With a single body design, you can easily switch between standard spotlight functionality and framing shutter spotlight capabilities.

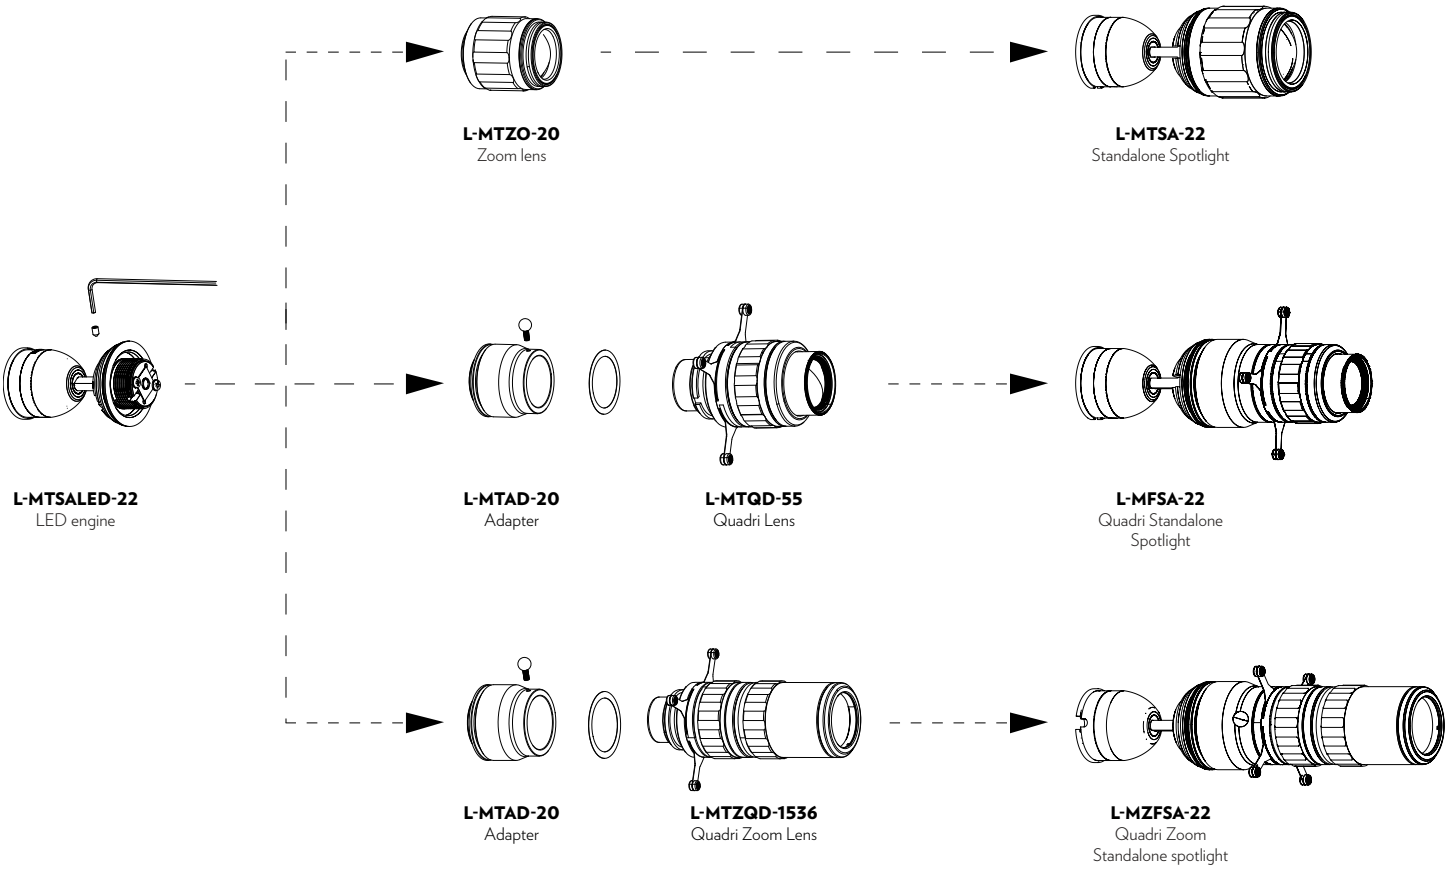

DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	1 - 1	165mA (9-42V)
OT 12W UNV 0A3 DUALDIM DIM-1 F	Constant Current driver with 0-10V control, 12W, 1 channel	1 - 1	165mA (26-42V)
DMX-25-150-900-U1P1	Constant Current driver with manual/ DMX control, 25W 1 channel	1 - 1	150mA (10-54V)
L-CT-DMX/RDM-6W-6CH	Constant Current driver with manual/ DMX control, 6W x 6 channels*	1 per channel	165mA (35.4V)
SOLOdrive 12W/S SL12S-M1Z1A1 (eldoled 12W 0-10V)	Constant current driver with 0-10V control, 12W, 1 channel	1 - 1	165mA (2-42V)

*To use with 6W L-MS..-20 spotlights only

VARIATIONS

L-MTSA-22
6W Standalone Spotlight

L-MTSP-22 6W
6W Onboard Dimmer

L-MSFS-20
6W Quadri-Standalone Solid Surface

L-MTFS-22
6W Quadri Framing Shutter

L-MFSA-22
6W Quadri-Standalone

L-MSZFS-20
6W Quadri-Zoom Standalone Solid Surface

L-MZFSA-22
6W Quadri-Zoom Standalone Dimmer

L-MTZFS-22
6W Quadri-Zoom Framing Shutter

Please check product cut sheets for details - driver indications vary per product.