




L-UPL-10-1
STANDALONE STEM

PRODUCT CUTSHEET



SCAN
FOR WEBSITE

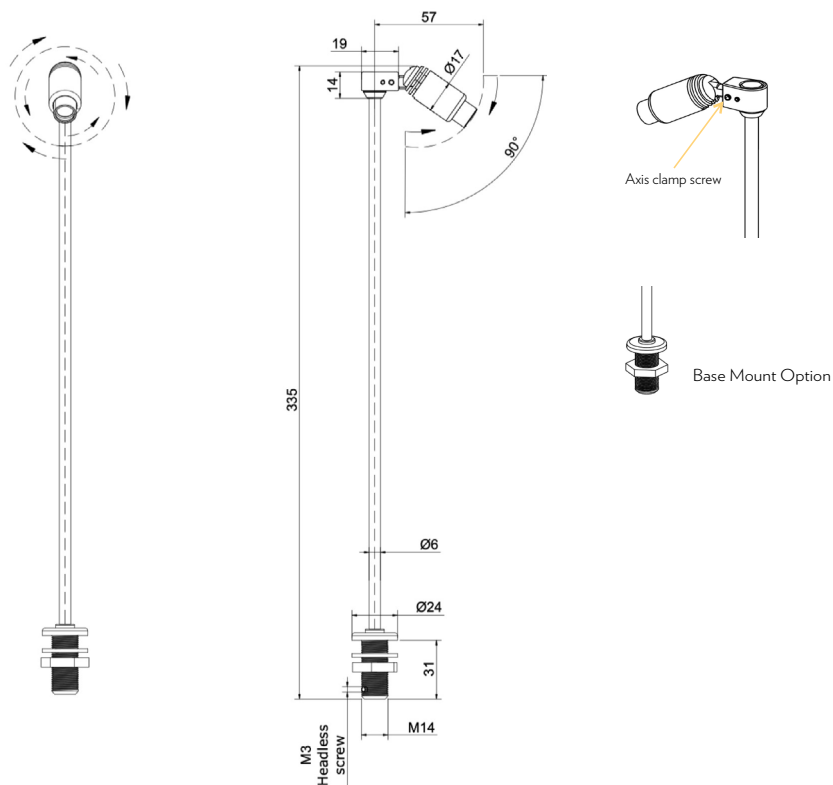

FEATURES

- STEM 1 has a single stationary spot light
- Full range of accessories – Barndoors, Snoots, Filter frame, etc.
- Stem 1 comes with a 6mm rod with adjustable height.
- Focusable from 9° to 70°
- These fixtures need to be wired together in series.

1W ACCESSORIES



L-MTAS-10
ANGLED
SNOOT



L-MTBD-10
BARNDOOR



L-MTFH-10
FILTER
HOLDER



L-MTBR-10
BEAM
REDUCER

TECHNICAL DATA

LED Wattage	1W	Color Finishing	Black, White and Silver
Wattage Once Used	1W	Storage Temperature	Recommended 22°C
Input Current	300-350ma constant current (connect in series)	Certificates / Standard	UL, CE
Beam Angles	Zoomable 9 to 70°	Warranty	5 Years
Pan / Tilt	355° / 90°	Drivers Compatible	Constant Current
Luminous Efficiency Of The LED	100lm/w @ra95 min	Lifespan	50 000 Hours
Color Temperatures	3000k, 4000k, 5000k	Lens	Glass
Adapter	Surface mount	LED	SMD CERAMIC
Dimmable Options	Dimmable with PWM Driver	Class	III, indoor use only
CRI	95 min	Rating	IP30
Weight	85g	Dimensions	68*22*300 (mm)
Main Material	Aluminum	Lenght Of Tail	145cm

PHOTOMETRICS

9°	◀Zoom▶		70°
Distances			
Ø79mm	1816 lux	0.5m	208 lux
Ø157mm	454 lux	1m	52 lux
Ø236mm	202 lux	1.5m	23 lux
Ø315mm	114 lux	2m	13 lux
			Ø700mm
			Ø1400mm
			Ø2101mm
			Ø2801mm

DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
SE-10-350-700-W1A	Constant Current driver with 0-10V control, 10W, 1 channel	1 - 4	350mA (2-12V)
SE-12-350-700-W1A	Constant Current driver with 0-10V control, 12W, 1 channel	4 - 8	350mA (10-24V)
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	3 - 14	350mA (9-42V)
SE-30-200-800-W1A	Constant Current driver with 0-10V control, 30W, 1 channel	3 - 14	350mA (9-42V)
AD-36-200-1200-U1P1	Constant Current driver with DMX control, 36W, 1 channel	4 - 18	350mA (10-54V)
SE-40-300-1050-W1A	Constant Current driver with 0-10V control, 40W, 1 channel	3 - 14	350mA (9-42V)
DMX-25-150-900-U1P1	Constant Current driver with DMX control, 25W, 1 channel	4 - 18	350mA (10-54V)
L-CT-DMX-RDM-1-3W-6CH	Constant Current driver with DMX control, 25W, 1 channel	1 - 6	350mA (3-21V)
SOLOdrive 12W/S SL12S-M1Z1A1 (eldoled 12W 0-10V)	Constant Current driver with 0-10V control, 12W, 1 channel	1 - 9	350mA (2-42V)

VARIATIONS



L-MTSP-11
1W Remote
Dimmer



L-MTSA-12
1W Standalone
Onboard Dimmer



L-MSPS-10
1W Standalone
Remote Dimmer



L-UPL-10-2/3/4
Stem Lights

Please check product cut sheets for details - driver indications vary per product.



luxam.com

LUXAM USA
12201 NW 35 Ste #534
Coral Springs, FL 33065
954 755 72 54 | info@luxam.com

LUXAM EUROPE
80 rue du Dessous des Berges
75013 Paris
+33982272946 | france@luxam.com

LUXAM GERMANY
Metzgerfeldweg 21
85737 Ismaning
+498951999651 | germany@luxam.com

LUXAM UK
184 Park Avenue
London NW10 7XL
info@luxam.com