LUXAM
LIGHTING FOR MUSEUMS





L-MTSA-12
1W STANDALONE HEAD

PRODUCT CUTSHEET

SCAN
FOR WEBSITE

PRODUCT CUTSHEET
L-MTSA-12 | 1W STANDALONE HEAD

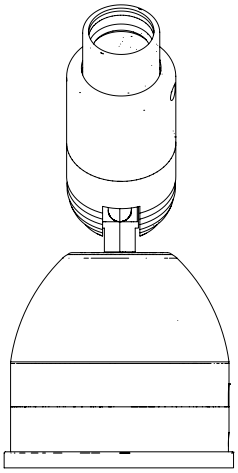

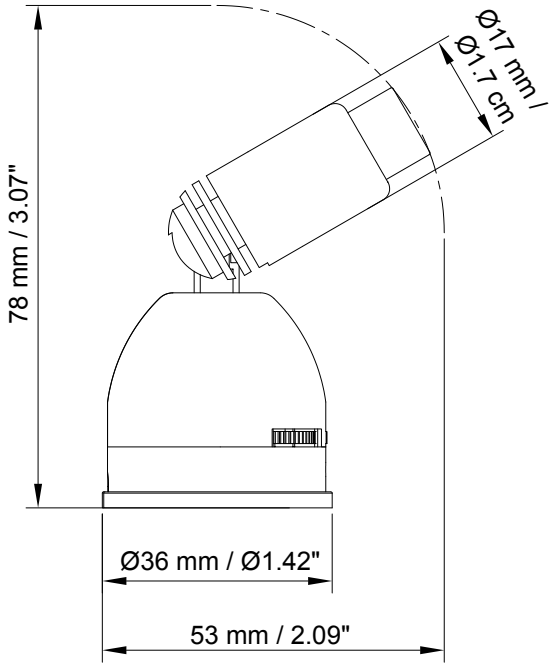

FEATURES

- Our micro track head in a stand-alone configuration dual base magnetic and screw in base
- Accepts all accessories for 1W
- Fully focusable 9° to 70

6W ACCESSORIES



L-MTAS-10
ANGLED SNOOT



L-MTBD-10
BARNDOOR



L-MTFH-10
FILTER HOLDER




L-MTBR-10
BEAM REDUCER

TECHNICAL DATA

Voltage	12 VDC	**Color Finishing**	Black, White and Silver
LED Wattage	1W	**Storage Temperature**	recommended 22°C
Wattage Once Used	1.2W	**Certificates / Standard**	UL, CE
Input Current	110mA	**Warranty**	5 years
Beam Angles	Zoomable 9 to 70°	**Drivers Compatible**	Constant Voltage
Pan / Tilt	355° / 90°	**Lifespan**	50 000 hours
Luminous Efficiency of the LED	100lm/W @RA95 min	**Lens**	Glass
Color Temperatures	3000K, 4000K, 5000K	**LED**	SMD CERAMIC
Adapter	Surface mount	**Class**	III, Indoor use only
Dimmable Options	On board Dimmer: PWM, range 0-100%	**Rating**	IP30
CRI	95 min	**Dimensions**	53 × 36 × 78 (mm) / 2.1 × 1.4 × 3.1"
Weight	96g	**Length of Tail**	145cm
Main Material	Aluminum		

PHOTOMETRICS

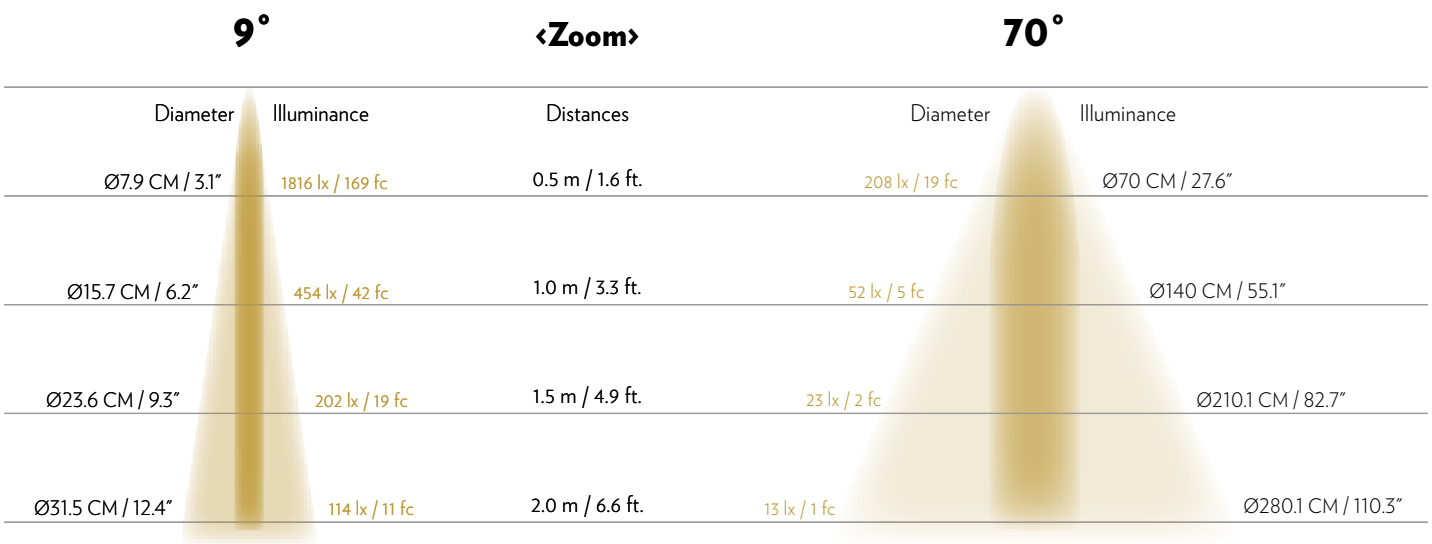

LUXAM USA
12201 NW 35 Ste #534
Coral Springs, FL 33065
954 755 7254 | info@luxam.com


LUXAM FRANCE
80 rue du Dessous des Berges
75013 Paris
+33 982 272 946 | france@luxam.com

LUXAM GERMANY
Metzgerfeldweg 21
85737 Ismaning
+498951999651 | germany@luxam.com

LUXAM UK
184 Park Avenue
London NW10 7XL
info@luxam.com

PRODUCT CUTSHEET
L-MTSA-12 | 1W STANDALONE HEAD

6W Spotlights can transform into Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights - with one body you can have either a spotlight or a framing shutter spotlight.

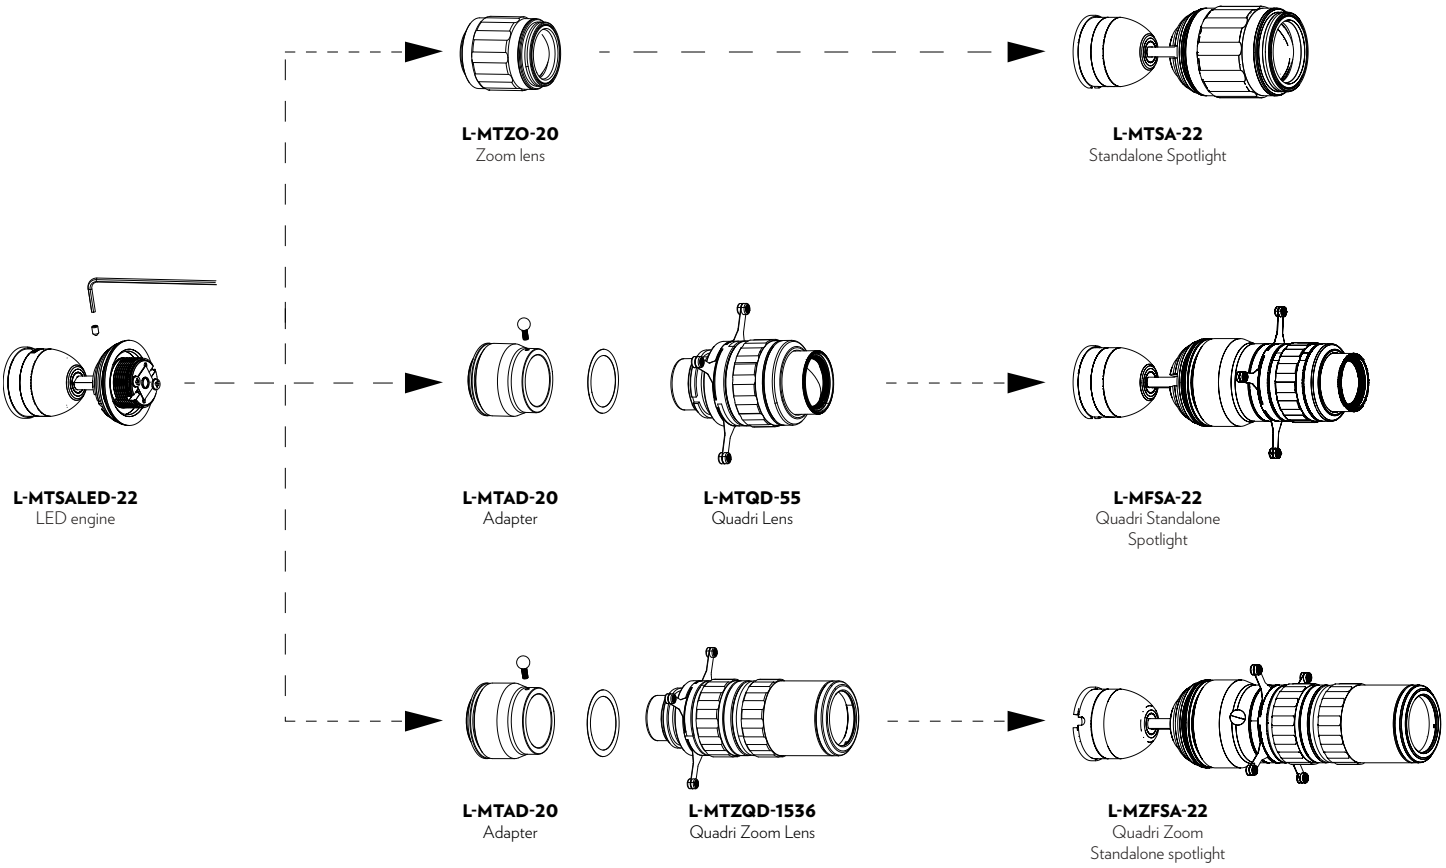

L-MTZO-20
Zoom lens

L-MTSA-22
Standalone Spotlight

L-MTSALED-22
LED engine

L-MTAD-20
Adapter

L-MTQD-55
Quadri Lens

L-MFSA-22
Quadri Standalone Spotlight

L-MTAD-20
Adapter

L-MTZQD-1536
Quadri Zoom Lens

L-MZFSA-22
Quadri Zoom Standalone spotlight

DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
SE-10-350-700-W1A	Constant Current driver with 0-10V control, 10W, 1 channel	1/4	110mA (2-12V)
SE-12-350-700-W1A	Constant Current driver with 0-10V control, 12W, 1 channel	4/8	110mA (10-24V)
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	3/14	110mA (9-42V)
SE-30-200-800-W1A	Constant Current driver with 0-10V control, 30W, 1 channel	3/14	110mA (9-42V)
AD-36-200-1200-U1P1	Constant Current driver with DMX control, 36W, 1 channel	4/18	110mA (10-54V)
SE-40-300-1050-W1A	Constant Current driver with 0-10V control, 40W, 1 channel	3/14	110mA (9-42V)
DMX-25-150-900-U1P1	Constant Current driver with DMX control, 25W, 1 channel	4/18	110mA (10-54V)
L-CT-DMX-RDM-1-3W-6CH	Constant Current driver with DMX control, 25W, 1 channel	1/6	110mA (3-21V)
OT 12W UNV 0A3 DUALDIM DIM-1 F (eldoled 2W)	Constant Current driver with 0-10V control, 12W, 1 channel	1/9	110mA (2-42V)

VARIATIONS



L-MTSP-11
1W Remote Dimmer



L-MSPS-10
1W Standalone Remote Dimmer



L-UPL-10-1/2/3/4
Stem Lights

Please check product cut sheets for details - driver indications vary per product.