
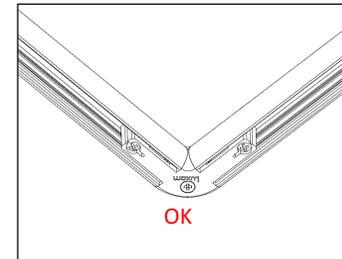
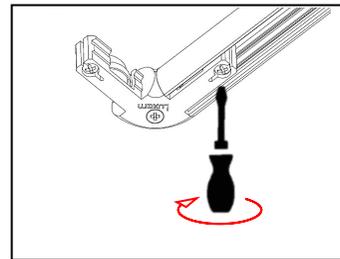
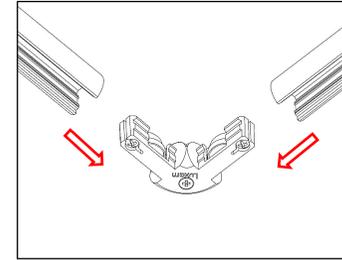
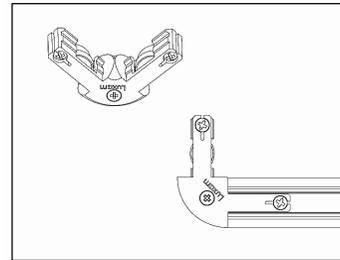




INSTRUCTION MANUAL

L-MTOTK O-Track and Connectors

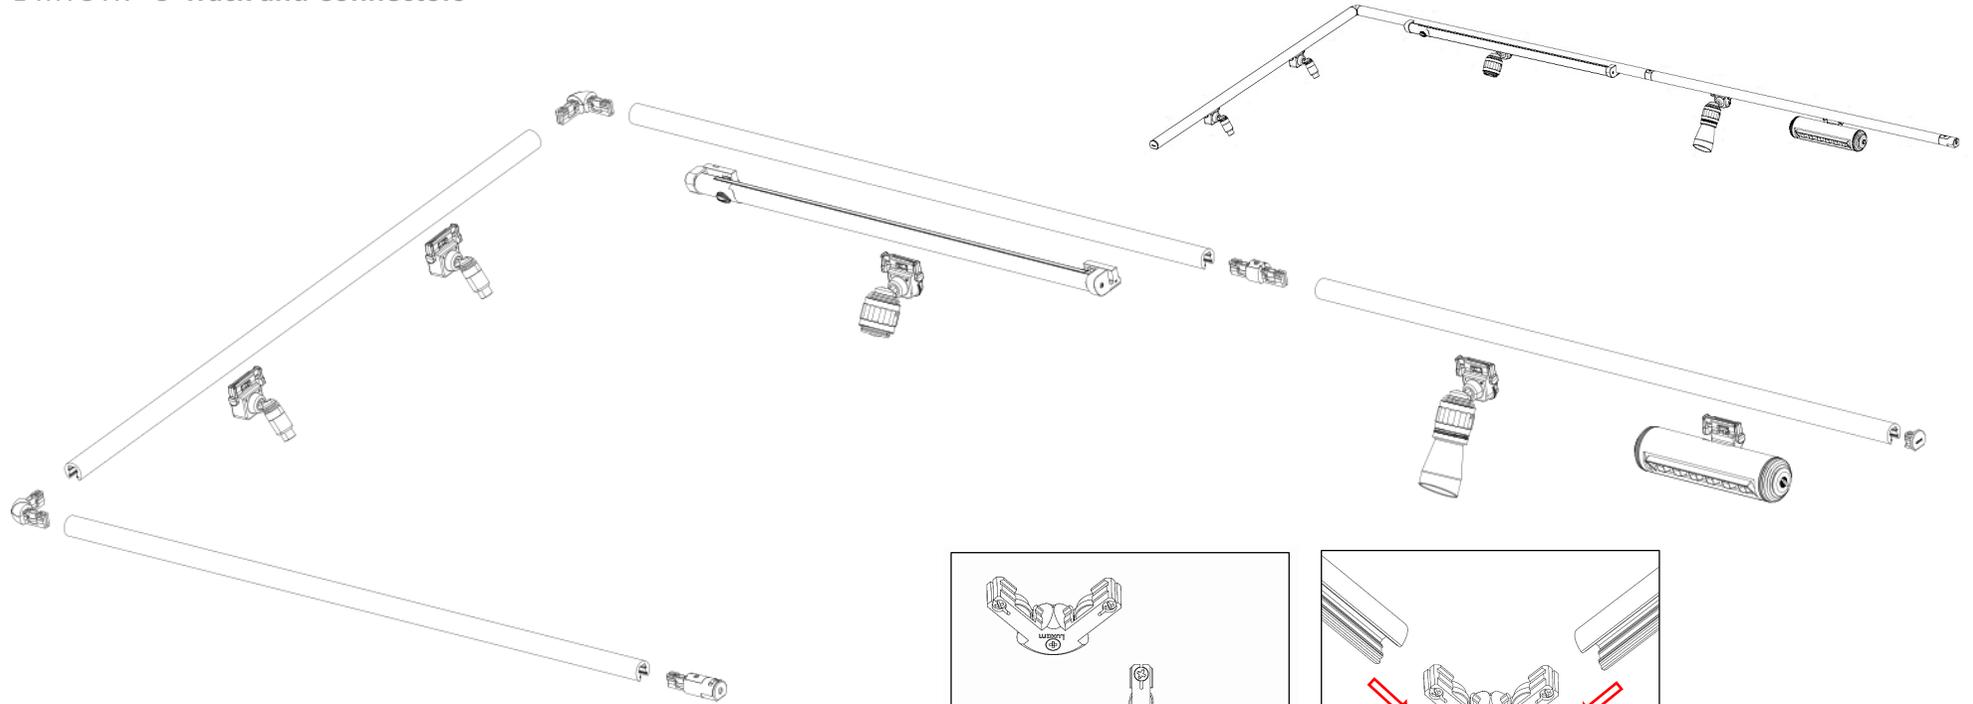

INSTRUCTION MANUAL

L-MTOTK Track and Connectors

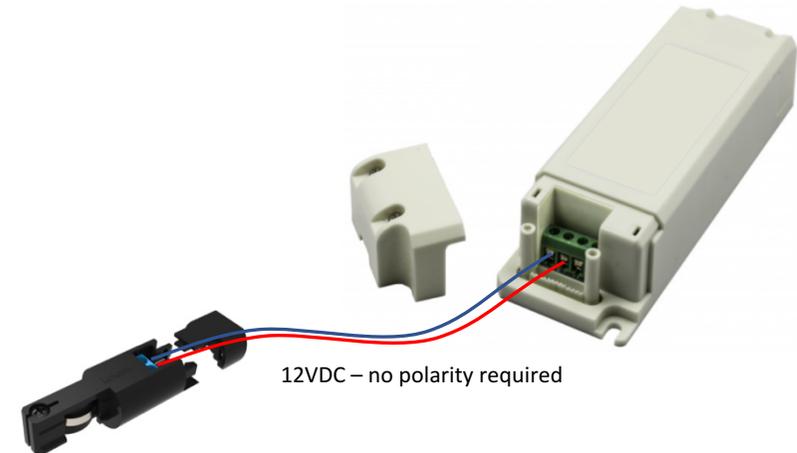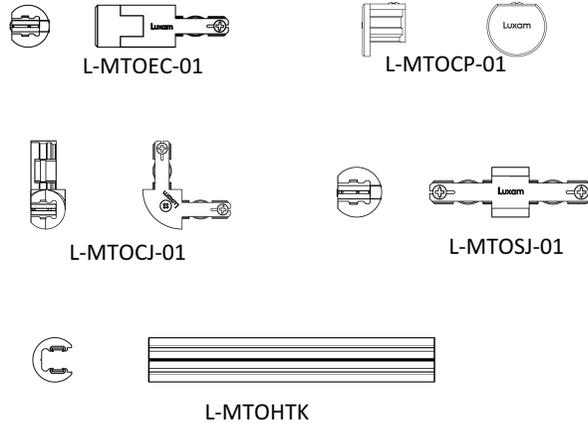

IMPORTANT SAFETY INSTRUCTIONS

- Read all instructions.
- Do not conceal or extend exposed conductors through a building wall.
- Do not install this system in wet locations.
- To reduce the risk of fire and burns, do not install this lighting system where the exposed bare conductors can be shorted or contact any conductive materials.
- To reduce the risk of fire and overheating, make sure all connections are tight.
- Do not install any luminaire closer than 6 in (152 mm) from any curtain, or similar combustible materials.
- Turn off electrical power before modifying the lighting system in any way.

SAVE THESE INSTRUCTIONS

For the safe handling, installation and operation of the L-MTOTK track system, a thorough review and understanding of the material written in this manual must be completed before starting the installation process. Failure to install the L-MTOTK track system per these instructions will void your warranty. There are no serviceable components in the L-MTOTK track system. Attempting to repair or alter the system in any way will also void your warranty. Always install the L-MTOTK track system according to all local, state, and national codes.

IMPORTANT : Always use with UL power unit, 12VDC, 10A maximum.

Instructions for power supply installation

- Before commencing any installation or maintenance work, please disconnect the power supply from the utility. Ensure that it cannot be re-connected inadvertently!
- Keep proper ventilation around the unit and do not stack any object on it. Also a 10-15 cm clearance must be kept when the adjacent device is a heat source.
- Mounting orientations other than standard orientation or operate under high ambient temperature may increase the internal component temperature and will require a de-rating in output current. Please refer to the specification sheet to receive the optimum mounting position and information about the de-rating curve.
- Current rating of an approved primary /secondary cable should be greater than or equal to that of the unit. Please refer to its specification.
- For LED power supplies with waterproof connectors, verify that the linkage between the unit and the lighting fixture is tight so that water cannot intrude into the system.