


LED Intelligent Driver

- Dimming interface: 0-10V (1-10V/PWM/RX), Push DIM.
- T-PWM™ digital dimming, present a perfect visual experience.
- With soft-on and fade in function, visual more comfortable.
- Automatic recognition of 0-10V, 1-10V input signal.
- Ultra-low consumption of 0-10V ports: < 0.05mA.
- Dimming range: 0-100%, LED start at 0.01% possible.
- 0-100% flicker free, High frequency exemption level.
- Innovative thermal management technology, intelligent power life protection.
- Multi-current & wide voltage, suitable for different power LED.
- Non-load output voltage 0V to prevent damages to LED caused by poor contact.
- Suitable for internal lights application for I/II/III.
- Up to 50000-hour life time
- 5 years warranty (Rubycon capacitor).

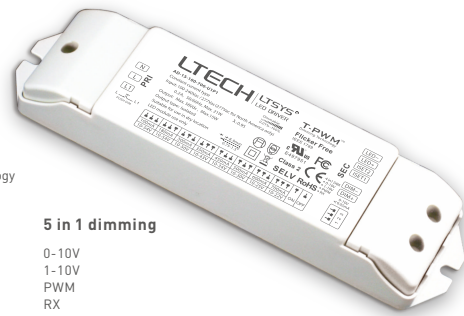

T-PWM™
Super depth dimming technology

Flicker-free

IEEE 1789

Dimmable:
0.01% - 100%

5 in 1 dimming

0-10V
1-10V
PWM
RX
Push DIM

5 years
warranty

CE E497951

FC

CE

RoHS

SELV

Class 2

RoHS SELV

Class 2

Class 2




Specification

Model	AD-15-100-700-U1P1	AD-25-150-900-U1P1	AD-36-200-1200-U1P1	
OUTPUT	Output Voltage	10-54Vdc		
	Max Output Voltage	58Vdc		
	Non-load Output Voltage	0Vdc		
	Output Current	100-700mA	150-900mA	200-1200mA
	Output Power	1W-15W	1.5W-25W	2W-36W
	Fluctuation Depth	Almost flicker-free / High frequency exemption assessment level.		
	Dimming Range:	0-100%, 0.01% dimming depth.		
	PWM Dimming Frequency	≤3600Hz		
	Current Accuracy	±5%		
Ripple & Noise	≤2V			
INPUT	Dimming Interface	0-10V(1-10V/PWM/RX), Push DIM		
	Input Voltage	100-277Vac ±10%, (Max. 90-305Vac)		
	Frequency	50/60Hz		
	Input Current	115Vac≤0.2A, 230Vac≤0.12A, 277Vac≤0.1A	115Vac≤0.3A, 230Vac≤0.2A, 277Vac≤0.15A	115Vac≤0.45A, 230Vac≤0.25A, 277Vac≤0.2A
	Power Factor	PF>0.97/115Vac, PF>0.9/230Vac, PF>0.88/277Vac (full load)	PF>0.97/115Vac, PF>0.93/230Vac, PF>0.85/277Vac (full load)	PF>0.95/115Vac, PF>0.9/230Vac, PF>0.85/277Vac (full load)
	THD	<16%/115Vac, <20%/230Vac, <29%/277Vac (full load)	<16%/115Vac, <20%/230Vac, <22%/277Vac (full load)	
	Efficiency(typ.)	82%	85%	88%
	Inrush Current(typ.)	Cold start 8A at 230Vac (twidth=75µs measured at 50% Ipeak)	Cold start 10A at 230Vac (twidth=75µs measured at 50% Ipeak)	Cold start 20A at 230Vac (twidth=75µs measured at 50% Ipeak)
	Anti Surge	L-N: 1kV		
Leakage Current	<0.5mA/230Vac			
ENVIRONMENT	Working Temperature	ta: -30°C ~ 55°C tc: 75°C		
	Working Humidity	20 ~ 95%RH, non-condensing		
	Storage Temp., Humidity	-40°C ~ 80°C, 10-95%RH		
	Temp. Coefficient	±0.03%/°C (0-50°C)		
	Vibration	10-500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes.		
PROTECTION	Over-heat Protection	Intelligently adjusting or turning off the output current if the PCB temperature ≥110°C. And the output current will be restored automatically when the temperature comes normal.		
	Over Load Protection	Shut down the output when current load ≥102%, auto recovers.		
	Short Circuit Protection	Shut down automatically if short circuit occurs, auto recovers.		
	Non-load Protection	Shut down the output if no load, auto recovers when load back to normal.		
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac		
	Isolation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH		
	Safety Standards	IEC/EN61347-1, IEC/EN61347-2-13		
	EMC Emission	EN55015, EN61000-3-2 Class C, IEC61000-3-3		
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11 EN61547		
Strobe Test Standard	IEEE 1789			
OTHERS	Dimension	175×44×30mm(L×W×H)		
	Packing	178×48×33mm(L×W×H)		
	Weight(G.W.)	175g±10g		

Dimensions

Unit: mm

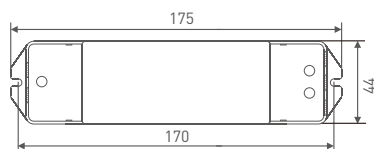

LED Current Selection

DIP switch for 8 optional currents' quick selection(see the table below).

Model	DIP Switch	⬇⬇⬇	⬇⬇⬆	⬇⬆⬆	⬆⬆⬆	⬆⬆⬆	⬆⬆⬆	⬆⬆⬆	⬆⬆⬆	ON OFF
	AD-15-100-700-U1P1	Output Current	100mA	180mA	300mA	350mA	450mA	500mA	600mA	
	Output Voltage	10-54V	10-54V	10-50V	10-43V	10-34V	10-30V	10-25V	10-22V	
	Output Power	1W-5.4W	1.8W-9.72W	3W-15W	3.5W-15.05W	4.5W-15.3W	5W-15W	6W-15W	7W-15.4W	
AD-25-150-900-U1P1	Output Current	150mA	250mA	300mA	350mA	500mA	600mA	700mA	900mA	
	Output Voltage	10-54V	10-54V	10-54V	10-54V	10-50V	10-42V	10-36V	10-28V	
	Output Power	1.5W-8.1W	2.5W-13.5W	3W-16.2W	3.5W-18.9W	5W-25W	6W-25.2W	7W-25.2W	9W-25.2W	
AD-36-200-1200-U1P1	Output Current	200mA	350mA	500mA	600mA	700mA	900mA	1050mA	1200mA	
	Output Voltage	10-54V	10-54V	10-54V	10-54V	10-52V	10-40V	10-35V	10-30V	
	Output Power	2W-10.8W	3.5W-18.9W	5W-27W	6W-32.4W	7W-36.4W	9W-36W	10.5W-36.75W	12W-36W	

* After current setting by DIP switch, power off and then power on to make the new current effective.

* E.g. LED 3.2V/pcs: 10-54V can power 3-16pcs LEDs in series, 10-22V can power 3-6pcs LEDs, the max quantity of LEDs in series will be subject to the actual voltage of LED.


Advanced options: connect ISET port with resistors of different values to set up currents

AD-15-100-700-U1P1 Connecting ISET with resistors can obtain the following typical currents.	Current (mA)	140mA	180mA	220mA	260mA	300mA	340mA	380mA	420mA	460mA	500mA
	Resistor (KΩ)	33.93 KΩ	27.78KΩ	23.19 KΩ	19.32KΩ	16.34 KΩ	14.05 KΩ	11.96KΩ	10.17 KΩ	8.57KΩ	7.16 KΩ
AD-25-150-900-U1P1 Connecting ISET with resistors can obtain the following typical currents.	Current (mA)	200mA	250mA	300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA
	Resistor (KΩ)	34KΩ	26.93KΩ	22.3KΩ	18.98 KΩ	15.93 KΩ	13.31 KΩ	11.45 KΩ	9.53KΩ	8.23 KΩ	6.72KΩ
AD-36-200-1200-U1P1 Connecting ISET with resistors can obtain the following typical currents.	Current (mA)	250mA	300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
	Resistor (KΩ)	41.6KΩ	34.7 KΩ	29.52KΩ	25.4 KΩ	21.9 KΩ	19 KΩ	16.66 KΩ	14.5KΩ	12.62 KΩ	11.19KΩ
	Current (mA)	750mA	800mA	850mA	900mA	950mA	1000mA	1050mA	1100mA	1150mA	
	Resistor (KΩ)	9.8 KΩ	8.57 KΩ	7.43 KΩ	6.42 KΩ	5.47 KΩ	4.65 KΩ	3.93 KΩ	3.2 KΩ	2.57 KΩ	



Connect resistor

Wiring Diagram

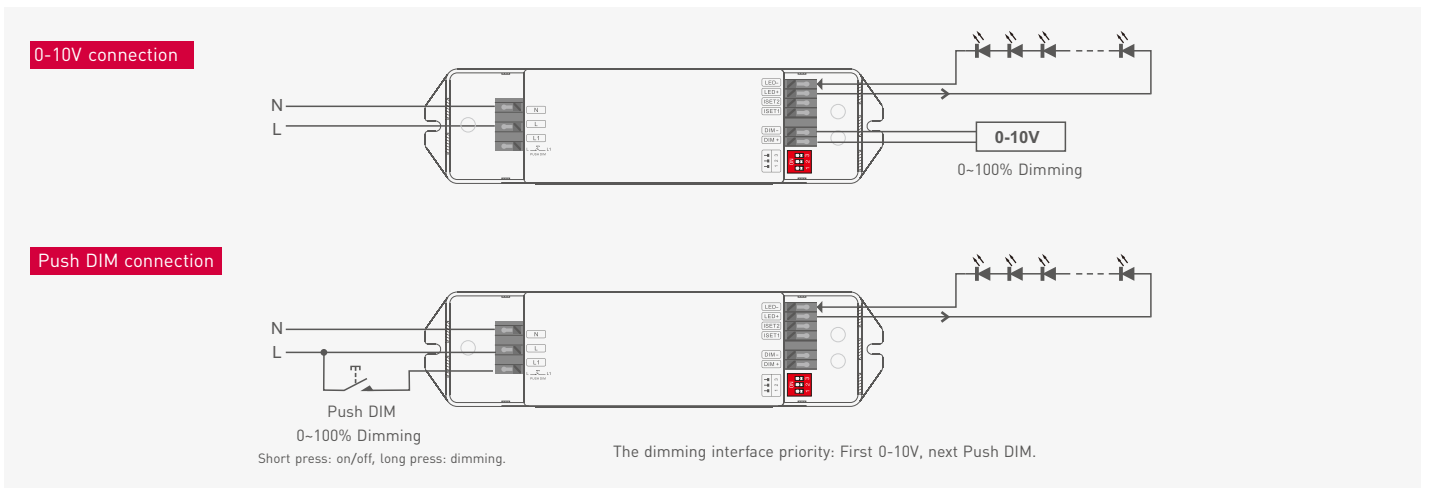

Push Dimming



Reset Switch

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the brightness goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.

Flicker Test Form

IEEE 1789


Limit of Modulation in low risk area	
Waveform frequency of Optical output	limit (%)
$f \leq 8\text{Hz}$	0.2
$8\text{Hz} < f \leq 90\text{Hz}$	$0.025 \times f$
$90\text{Hz} < f \leq 1250\text{Hz}$	$0.08 \times f$
$f > 1250\text{Hz}$	Exemption assessment
Limit of Modulation in no effect area	
Waveform frequency of Optical output	limit (%)
$f \leq 10\text{Hz}$	0.1
$10\text{Hz} < f \leq 90\text{Hz}$	$0.01 \times f$
$90\text{Hz} < f \leq 3125\text{Hz}$	$[0.08/2.5] \times f$
$f > 3125\text{Hz}$	Exemption assessment (High frequency exemption)

Brightness

- ▲ 0.1%
- ◆ 1%
- ▲ 5%
- ◆ 10%
- 20%
- ▲ 30%
- 40%
- ★ 50%
- 60%
- 70%
- 80%
- ★ 90%
- ◆ 100%

Marks in the right chart were tested results of different current ranges.

The output frequency is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.

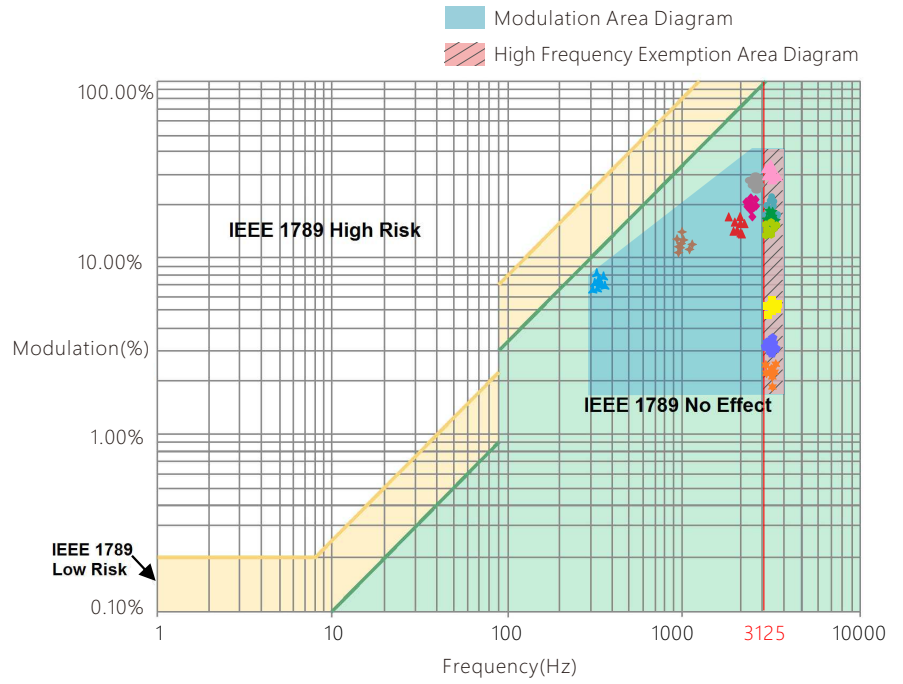

* No further notice if any changes in the manual.
Product function depends on the goods.
Please feel free to contact your supplier if any question.