



FEATURES

- Fully compatible with all MicroTrack systems
- Fully dimmable with onboard dimmer

6W ACCESSORIES



L-MTAS-20
ANGLED
SNOOT



L-MTBD-20
BARNDOOR




L-MTFH-20
FILTER HOLDER



TECHNICAL DATA

Voltage	11v -24VDC	Color Finishing	Black, White and Silver
Led Wattage	6W	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	7.8W	Storage Temperature	recommended 22°C
Input Current	650mA - 330mA	Certificates & Warranty	CE / 5 years
Beam Angles	55°	Drivers Compatible	CV
Pan / Tilt	355°/90°	Lifespan	50000 hours
Color Temperatures Available	3000K,4000K,5000K	Lens	Glass
Adapter	Surface Mount	LED	COB
Dimmable Options	Onboard Dimmer PWM 0-100%	Class	⚡
CRI	97 typ	Rating	IP30
Main Material	Aluminum	Indoor Use	only

PHOTOMETRICS

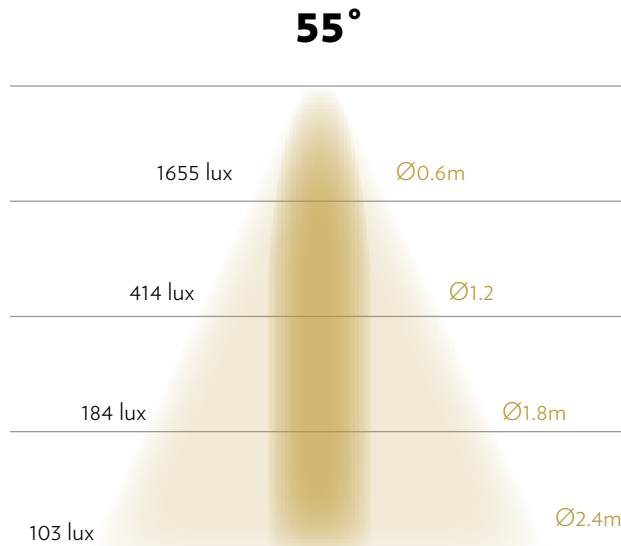



VARIATIONS



L-MTSP-22
6W Spotlight with
onboard dimmer



L-MTSA-22
6W Standalone
Spotlight



L-MSPS-20
6W Standalone
Solid Surface



L-MTFS-22
6W Quadri
Framing Shutter

Please check product cut sheets for details - driver indications vary per product.

