



FEATURES

- Fully compatible with all MicroTrack systems
- Fully focusable 8° to 56°
- No onboard dimmer - Can dim the whole track.
- Accessories include Barndoors, Snoots, & Filter frames

3W ACCESSORIES



L-MTFH-01
FILTER
HOLDER



L-MTAR-01
ARCHITECTURAL
SNOOT



L-MTSN-01
CONE SNOOT



L-MTAS-10
ANGLED SNOOT



L-MTBD-01
BARNDOOR




L-MTBS-01
BOOSTER

TECHNICAL DATA

| | | | |
|-------------------------------------|--|----------------------------------|--------------------------|
| Voltage | 12 VDC | Color Finishing | Black, White and Silver |
| Led Wattage | 3W | Working Temperature | recommended 10°C to 25°C |
| Wattage Once Used | 3.8W | Storage Temperature | recommended 22°C |
| Input Current | 340mA | Certificates / Standard | UL, CE |
| Beam Angles | Zoomable 8° to 56° | Warranty | 5 years |
| Pan / Tilt | 355° / 90° | Class | III |
| Luminous Flux & Lumens | 270lm @RA97 / 130 lm | Rating | IP30 |
| Color Temperatures Available | 3000K / 4000K / 5000K | Drivers Compatible Cc/ Cv | CV |
| Adapter | Luxam Micro Track | Lifespan | 50000 hours |
| Dimmable Options | External dimming with PWM 12V track driver | Lens | Glass |
| CRI | 97 typ | LED | SMD CERAMIC |
| Weight | 82g | Dimensions | 81 x 44 x 44 (mm) |
| Main Material | Aluminum | Indoor Use | only |

PHOTOMETRICS

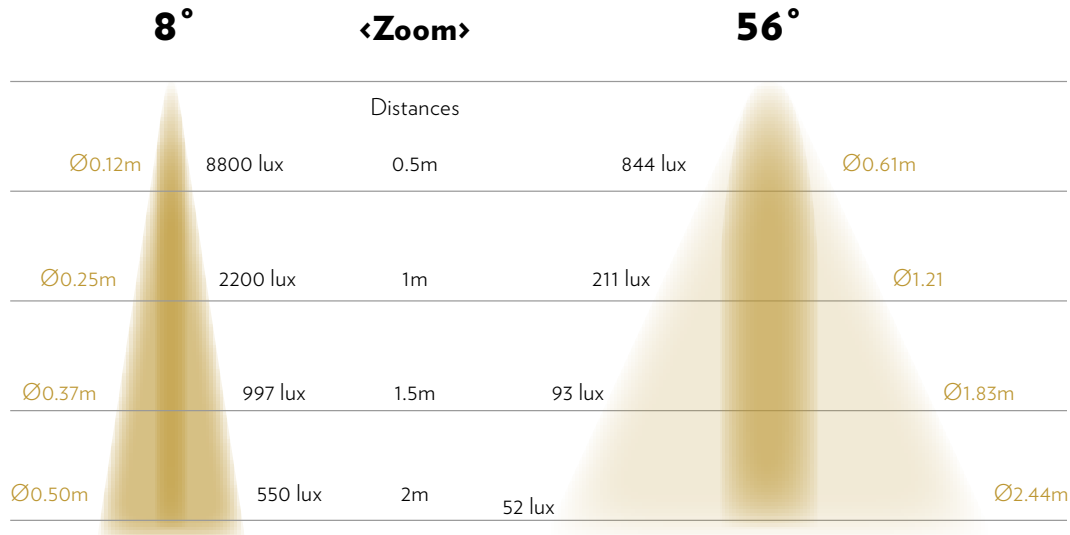



DRIVERS COMPATIBLE

| Driver | Watts/Driver | 80% Capacity | # Fixtures/Driver* | Current |
|------------|--------------|--------------|--------------------|---------|
| LPV-100-12 | 100W | 80W | 20 Fixtures | CV |
| LPV-60-12 | 60W | 48W | 12 Fixtures | CV |
| LPV-35-12 | 35W | 28W | 6 Fixtures | CV |
| NPF-90-12 | 90W | 72W | 18 Fixtures | CV & CC |
| NPF-40-12 | 40W | 32W | 8 Fixtures | CV & CC |

VARIATIONS



L-MTSA-02
3W Standalone
Onboard Dimmer



L-MSPS-00
3W Standalone
Remote Dimmer



L-MTFS-02
3W Quadri -
Framing Shutter Spotlight



L-MTSP-02
3W Spotlight

Please check product cut sheets for details - driver indications vary per product.