

FEATURES

- Fully compatible with all MicroTrack systems
- Focusable 8° to 56°
- Fully Dimmable with onboard dimmer
- Full range of accessories including Barndoors, Snoots, Filter frames & more

3W ACCESSORIES



L-MTFH-01
FILTER
HOLDER

L-MTAR-01
ARCHITECTURAL
LENS

L-MTSN-01
SNOOT

L-MTSC-01
CONE SNOOT

L-MTAS-01
ANGLED SNOOT


L-MTBD-01
BARNDOOR

L-MTBS-01
BOOSTER

TECHNICAL DATA

Voltage	12 VDC	Color Finishing	Black, White and Silver
Led Wattage	3W	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	3.8W	Storage Temperature	recommended 22°C
Input Current	340mA	Certificates / Standard	UL, CE
Beam Angles	Zoomable 8° to 56°	Warranty	5 years
Pan / Tilt	355° / 90°	Drivers Compatible	CV
Luminous Flux & Lumens	270lm @RA97 / 130lm	Lifespan	50000 hours
Color Temperatures Available	3000K/4000K/5000K	Lens	Glass
Adapter	Luxam Micro Track	LED	SMD CERAMIC
Dimmable Options	On board Dimmer: PWM, range 0-100%	Class	III
CRI	97 typ	Rating	IP30
Weight	84g	Dimensions	81*44*44 (mm)
Main Material	Aluminum	Indoor Use	only

PHOTOMETRICS

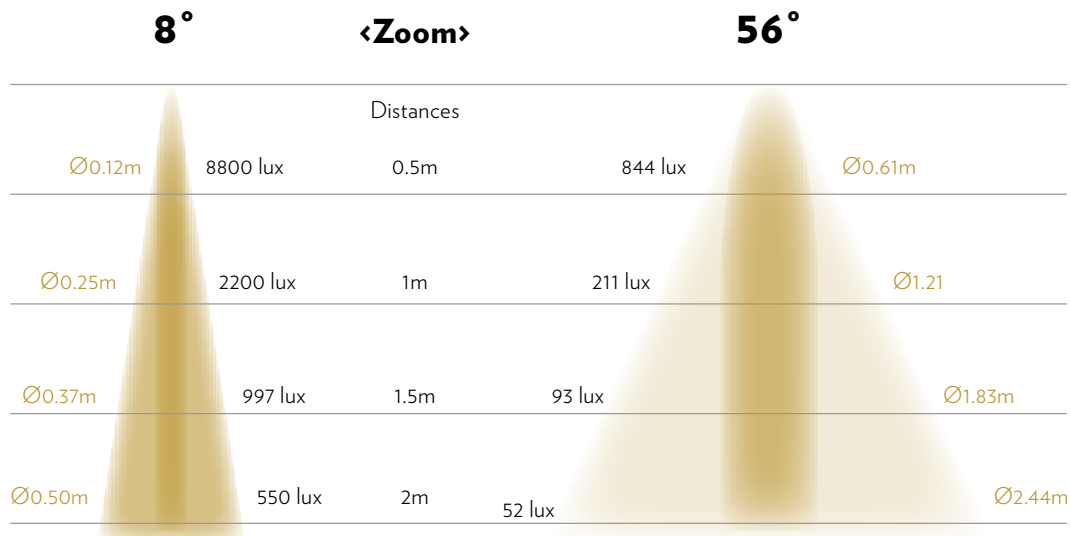

DRIVERS COMPATIBLE

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LPV-100-12	100W	80W	20 Fixtures	CV
LPV-60-12	60W	48W	12 Fixtures	CV
LPV-35-12	35W	28W	6 Fixtures	CV
NPF-90-12	90W	72W	18 Fixtures	CV & CC
NPF-40-12	40W	32W	8 Fixtures	CV & CC

VARIATIONS



L-MTSA-02
3W Standalone
Onboard Dimmer



L-MSPS-00
3W Standalone
Remote Dimmer



L-MTFS-02
3W Quadri -
Framing Shutter Spotlight



L-MTSP-01-ND
3W Spotlight
No Dimmer

Please check product cut sheets for details - driver indications vary per product.