

L-UPL-10-1 STEM

FEATURES

- STEM 1 has a single stationary spot light
- Full range of accessories – Barndoors, Snoots, Filter frame, etc.
- Stem 1 comes with a 6mm rod with adjustable height.
- Focusable from 9° to 70°

1W ACCESSORIES



L-MTAS-10
ANGLED SNOOT



L-MTBD-10
BARNDOOR



L-MTFH-10
FILTER HOLDER




L-MTBR-10
BEAM REDUCER

TECHNICAL DATA

Voltage	2.75 VDC min	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	1W	Storage Temperature	recommended 22°C
Input Current	300-350mA Constant Current	Certificates	UL - CE
Beam Angles	Zoomable 9 to 70°	Warranty	5 years
Pan / Tilt	355°/90°	Class	⚡
Luminous Flux & Lumens	98lm @RA97 / 56 lm	Rating	IP30
Color Temperatures	3000K, 4000K, 5000K	Drivers Compatible	CC
Adapter	Surface mount	Lifespan	50000H
Dimmable Options	Dimmable with PMW driver	Lens	Glass
CRI	97 typ	LED	SMD CERAMIC
Weight	89g	Dimensions	360*73*24 (mm)
Main Material	Aluminum	Indoor Use	Only
Color Finishing	Black, White, Silver, Gold	Length of Tail	145cm

PHOTOMETRICS

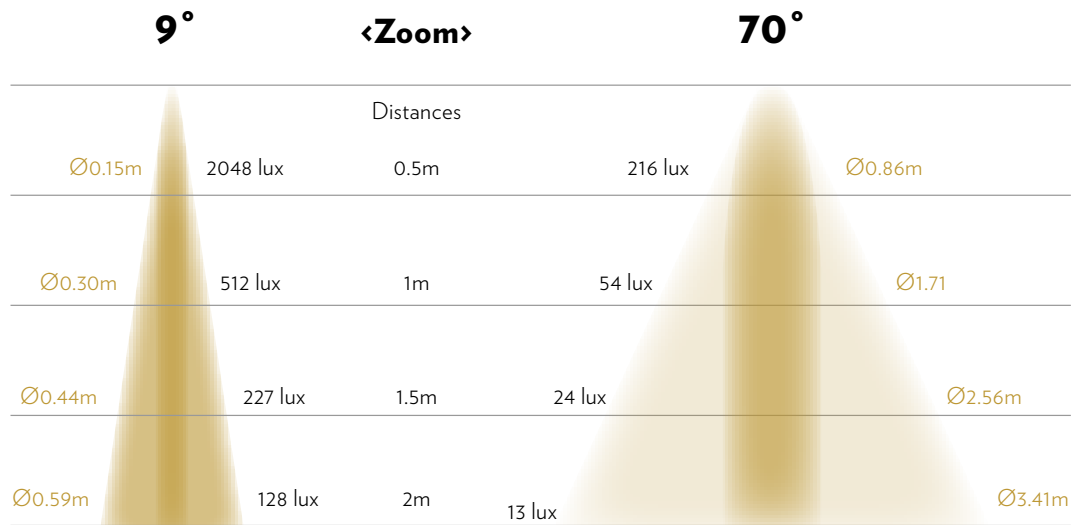

DRIVERS COMPATIBLE

L-UPL-10-1

Driver	Min-Max #of Fixtures	Current	Setting
AD-36-200-1200-U1P1	3-18 Fixtures	CC	350mA
SE-10-350-700-W1A	1-4 Fixtures	CC	350mA
DMX-25-150-900-U1P1	3-18 Fixtures	CC	350mA

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.