



FEATURES

- Fully focusable 8° to 56°
- Can add dimmer to the driver
- Accepts all 6W accessories

6W ACCESSORIES



L-MTAS-20
ANGLED
SNOOT



L-MTBD-20
BARNDOOR




L-MTFH-20
FILTER HOLDER

TECHNICAL DATA

Voltage	For Constant Current Driver 36.2V DC	Color Finishing	Black, White and Silver
Led Wattage	-	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	6W	Storage Temperature	recommended 22°C
Input Current	165mA	Certificates / Standard	CE
Beam Angles	Zoomable 8° to 55°	Warranty	5 years
Pan / Tilt	355° / 90°	Drivers Compatible	CC (Constant Current)
Luminous Flux & Lumens	813lm @RA97 / 255lm	Lifespan	50000H
Color Temperatures Available	3000K, 4000K, 5000K	Lens	Glass
Adapter	Surface mount	LED	COB
Dimmable Options	Onboard Dimmer PWM 0-100%	Class	III
CRI	97 typ	Rating	IP30
Weight	160.25 grams	Length of Tail	145cm
Main Material	Aluminum	Indoor Use	Only

PHOTOMETRICS

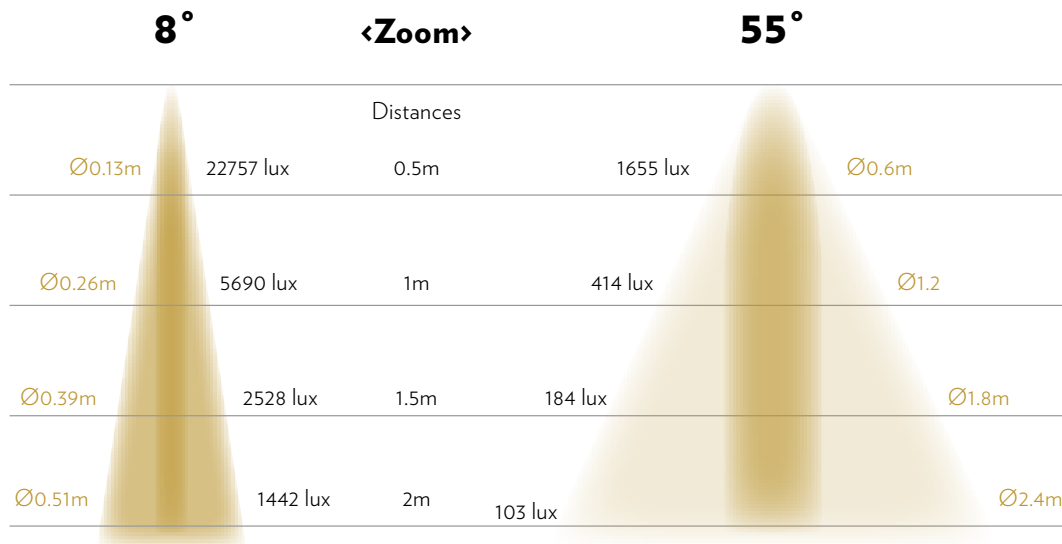



DRIVERS COMPATIBLE

Driver	Min-Max #of Fixtures	Current	Setting
AD-15-100-700-U1P1	1 Fixtures	CC	150mA
AD-36-200-1200-U1P1	1 Fixtures	CC	150mA
SE-12-100-400-W1A	1 Fixtures	CC	150mA
DMX-25-150-900-U1P1	1 Fixtures	CC	150mA

VARIATIONS



L-MTSP-22
6W Spotlight with onboard dimmer



L-MTSA-22
6W Standalone Spotlight



L-MTFS-22
6W Quadri Framing Shutter



L-MFSA-22
6W Quadri-Standalone

Please check product cut sheets for details - driver indications vary per product.