

FEATURES


- Fully compatible with all MicroTrack systems
- Fully dimmable with onboard dimmer



TECHNICAL DATA

Voltage	11v -24VDC	Color Finishing	Black, White and Silver
Led Wattage	6W	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	7.8W	Storage Temperature	recommended 22°C
Input Current	650mA - 330mA	Certificates & Warranty	UL - CE / 5 years
Beam Angles	55°	Drivers Compatible	CV
Pan / Tilt	355°/90°	Lifespan	50000 hours
Color Temperatures Available	3000K,4000K,5000K	Lens	Glass
Adapter	Luxam Micro Track	LED	COB
Dimmable Options	Onboard Dimmer PWM 0-100%	Class	⚡
CRI	97 typ	Rating	IP30
Weight	265g	Dimensions	146*50*44 (mm)
Main Material	Aluminum	Indoor Use	only

PHOTOMETRICS

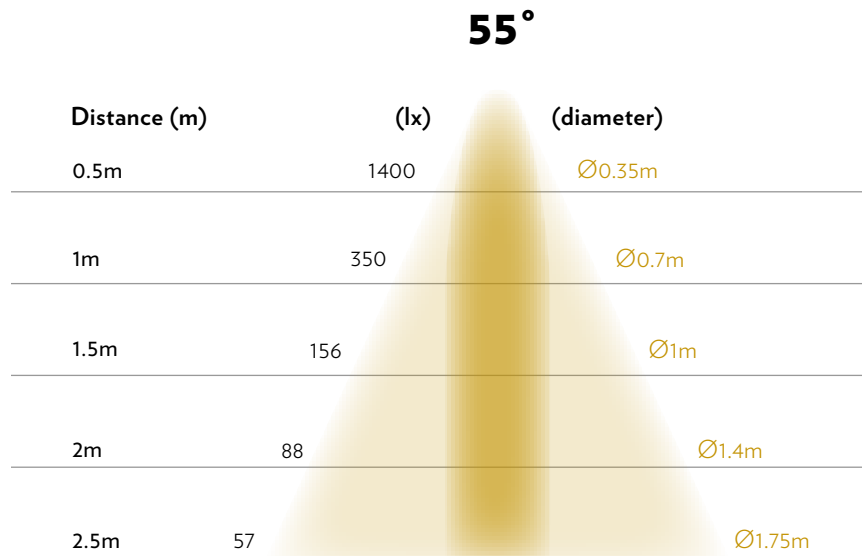



DRIVERS

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LPV-100-12	100W	80W	10 Fixtures	CV
LPV-60-12	60W	48W	6 Fixtures	CV
LPV-35-12	35W	28W	2 Fixtures	CV
NPF-90-12	90W	72W	9 Fixtures	CV & CC
NPF-40-12	40W	32W	3 Fixtures	CV & CC

VARIATIONS



L-MTSP-22
6W Spotlight with onboard dimmer



L-MTSA-22
6W Standalone Spotlight



L-MSPS-20
6W Standalone Solid Surface



L-MFSA-22
6W Quadri-Standalone

Please check product cut sheets for details - driver indications vary per product.