

**L-UPL-10-1 STEM**

**FEATURES**

- STEM 1 has a single stationary spot light
- Full range of accessories – Barndoors, Snoots, Filter frame, etc.
- Stem 1 comes with a 6mm rod with adjustable height.
- Focusable from 9° to 70°

**1W ACCESSORIES**



**L-MTAS-10**  
ANGLED SNOOT



**L-MTBD-10**  
BARNDOOR



**L-MTFH-10**  
FILTER HOLDER




**L-MTBR-10**  
BEAM REDUCER

**TECHNICAL DATA**

<b>Voltage</b>	2.75 VDC min	<b>Working Temperature</b>	recommended 10°C to 25°C
<b>Wattage Once Used</b>	1W	<b>Storage Temperature</b>	recommended 22°C
<b>Input Current</b>	300-350mA Constant Current	<b>Certificates</b>	UL - CE
<b>Beam Angles</b>	Zoomable 9 to 70°	<b>Warranty</b>	5 years
<b>Pan / Tilt</b>	355°/90°	<b>Class</b>	⚡
<b>Luminous Flux &amp; Lumens</b>	98lm @RA97 / 56 lm	<b>Rating</b>	IP30
<b>Color Temperatures</b>	3000K, 4000K, 5000K	<b>Drivers Compatible</b>	CC
<b>Adapter</b>	Surface mount	<b>Lifespan</b>	50000H
<b>Dimmable Options</b>	Dimmable with PMW driver	<b>Lens</b>	Glass
<b>CRI</b>	97 typ	<b>LED</b>	SMD CERAMIC
<b>Weight</b>	89g	<b>Dimensions</b>	360*73*24 (mm)
<b>Main Material</b>	Aluminum	<b>Indoor Use</b>	Only
<b>Color Finishing</b>	Black, White, Silver, Gold	<b>Length of Tail</b>	145cm

**PHOTOMETRICS**

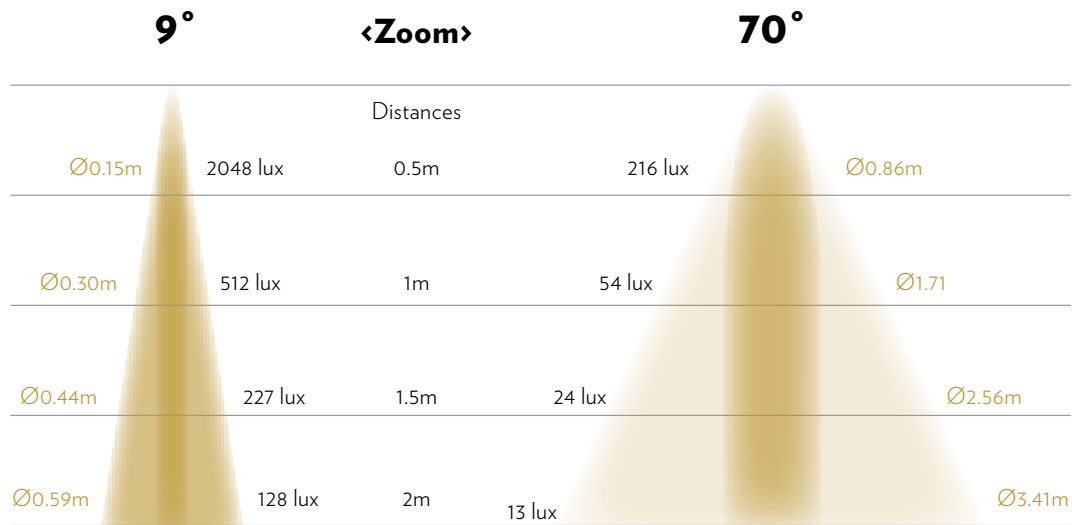

**DRIVERS COMPATIBLE**

**L-UPL-10-1**

Driver	Min-Max #of Fixtures	Current	Setting
AD-36-200-1200-U1P1	3-18 Fixtures	CC	350mA
SE-10-350-700-W1A	1-4 Fixtures	CC	350mA
DMX-25-150-900-U1P1	3-18 Fixtures	CC	350mA

**VARIATIONS**



Please check product cut sheets for details - driver indications vary per product.