

FEATURES

- Total weight: 350g
- FS weight: 215g
- Max size: 180 x 50 x 44 mm
- (180 x 76 x 76 mm with open blades)




TECHNICAL DATA

Voltage:	11v -24 VDC	Working Temperature	recommended 10°C to 25°C
Led Wattage:	6W	Storage Temperature (Specify C Or F)	recommended 22°C
Wattage Once Used:	7.8W	Certificates / Standard	CE
Input Current:	650mA - 330mA	Warranty	5 years
Beam Angles:	15°-36°	Drivers Compatible Cc/ Cv	⬠
Pan / Tilt:	355° / 90°	Lifespan	IP30
Color Temperatures Available:	3000K/ 4000K/ 5000K	Lens	CV
Adapter:	Luxam Micro Track	LED	50000H
Dimmable Options:	On board Dimmer: PWM, range 0-100%	Class	Glass
CRI	97 typ	Rating	COB
Weight	350gr	Dimensions	180*50*44(mm)
Main Material	Aluminum	Indoor use	only
Color Finishing	Black, White and Silver		

PHOTOMETRICS

For the square projection

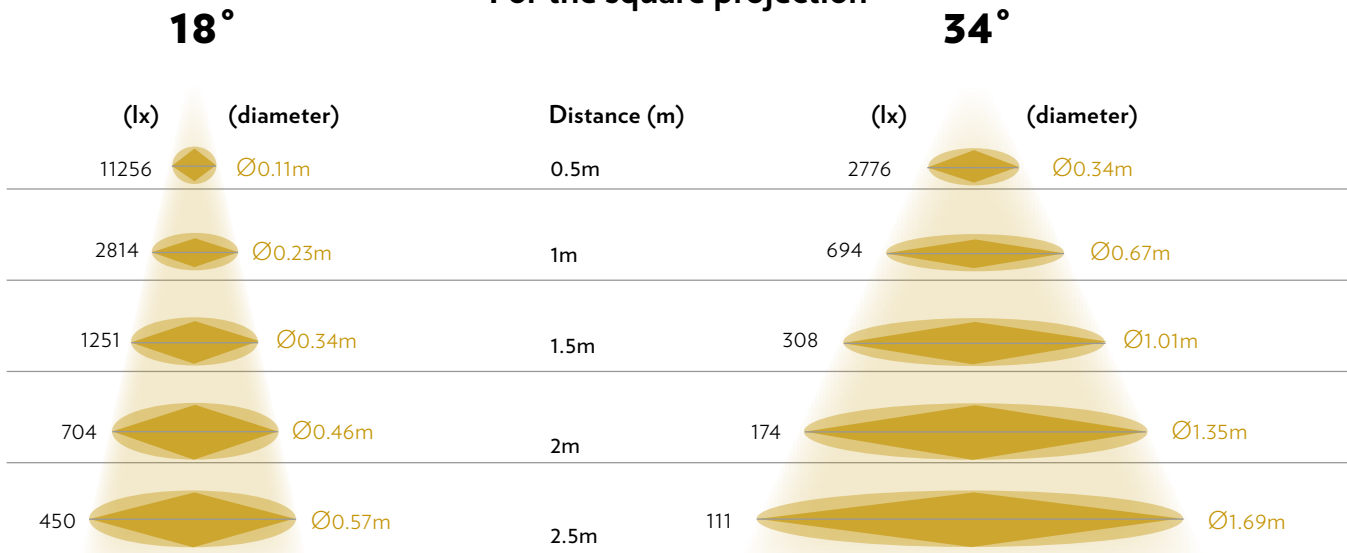



The L-MTSP-22 6W Spotlight can transform into the L-MTFS-22 Quadri Spotlight - with one body you can have either a spotlight or a framing shutter spotlight.



DRIVERS COMPATIBLE

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LPV-100-12	100W	80W	10 Fixtures	CV
LPV-60-12	60W	48W	6 Fixtures	CV
LPV-35-12	35W	28W	2 Fixtures	CV
NPF-90-12	90W	72W	9 Fixtures	CV & CC
NPF-40-12	40W	32W	3 Fixtures	CV & CC

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.