

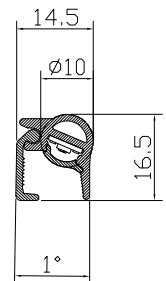
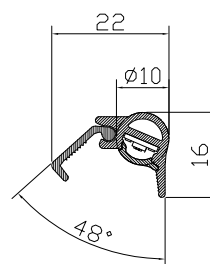


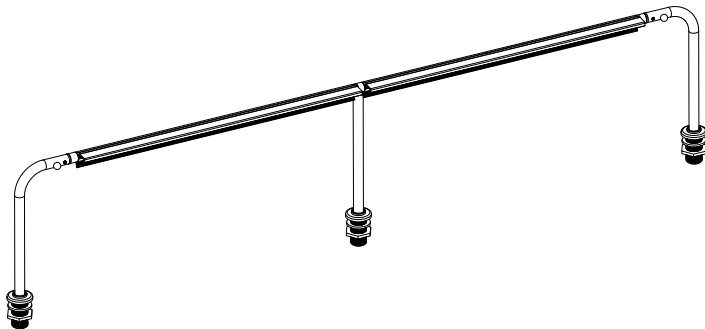

SCAN
TO VIEW VIDEO

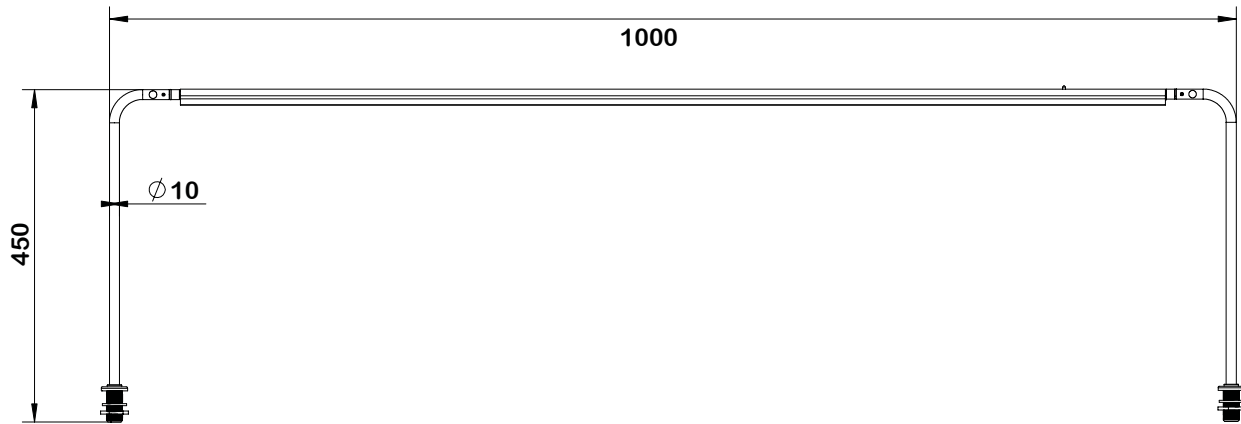

FEATURES

- Available in 1M, 1.5M, and 2M
- 30-120° beamspread using adjustable barndoors
- 12V input with 15, 23 and 30W output
- 3000K, 4000K, or 5000K
- Standard color is Black Anodized
- Adjustable height 5cm-2 meters




TECHNICAL DATA

Voltage	12 VDC	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	12W/meter	Storage Temperature	recommended 22°C
Input Current	1000mA/meter	Certificates	UL - CE
Beam Angles	90°	Warranty	5 years
Tilt	360°	Rating	IP30
Luminous Flux & Lumens	456 lm/meter	Drivers Compatible	CV
Color Temperatures	3000K, 4000K, 5000K	Lifespan	50000H
Adapter	Surface mount	Lens	PC
Dimmable Options	Dimmable with PWM driver	LED	SMD Ceramic
CRI	97+	Dimensions	-
Main Material	Aluminum	Indoor Use	Only
Color Finishing	Black, White, Silver, Gold	Length of Tail	145cm

PHOTOMETRICS

LMBA TALEA – 1000mm

112°

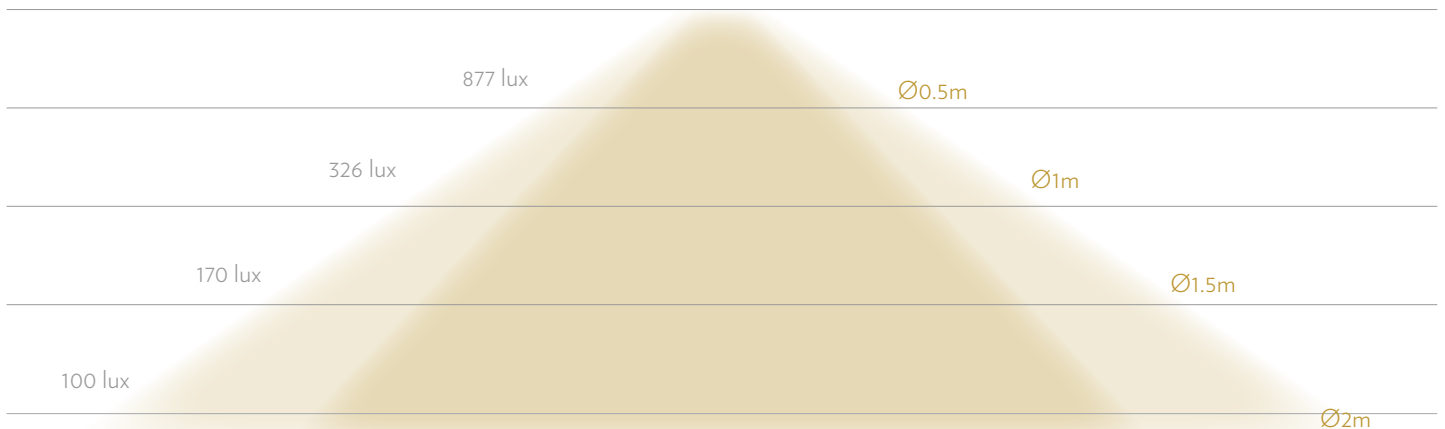



DRIVERS COMPATIBLE

L-MBA - 1000mm

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LM-60-12-U1A2	60W	48W	3 Fixtures	CV

SCREW SIZES Barn Door and Base: 1.5mm

L-MBA - 1500mm

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LM-60-12-U1A2	60W	48W	2 Fixtures	CV

SCREW SIZES Barn Door and Base: 1.5mm