

FEATURES

- Fully focusable 8° to 56°
- Can add dimmer to the driver
- Accepts all 6W accessories
- These fixtures need to be wired together in series.

6W ACCESSORIES



L-MTAS-20
ANGLED
SNOOT



L-MTBD-20
BARNDOR




L-MTFH-20
FILTER HOLDER

TECHNICAL DATA

Voltage	For Constant Current Drivers with an output voltage range starting from 34V DC or less	Color Finishing	Black, White and Silver
Led Wattage	-	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	6W	Storage Temperature	recommended 22°C
Input Current	165mA	Certificates / Standard	CE
Beam Angles	Zoomable 8° to 55°	Warranty	5 years
Pan / Tilt	355° / 90°	Drivers Compatible	CC (Constant Current)
Luminous Flux & Lumens	813lm @RA97 / 255lm	Lifespan	50000H
Color Temperatures Available	3000K, 4000K, 5000K	Lens	Glass
Adapter	Surface mount	LED	COB
Dimmable Options	Dimmable with PMW driver	Class	III
CRI	97 typ	Rating	IP30
Weight	160.25 grams	Length of Tail	145cm
Main Material	Aluminum	Indoor Use	Only

These fixtures need to be wired together in series.

PHOTOMETRICS

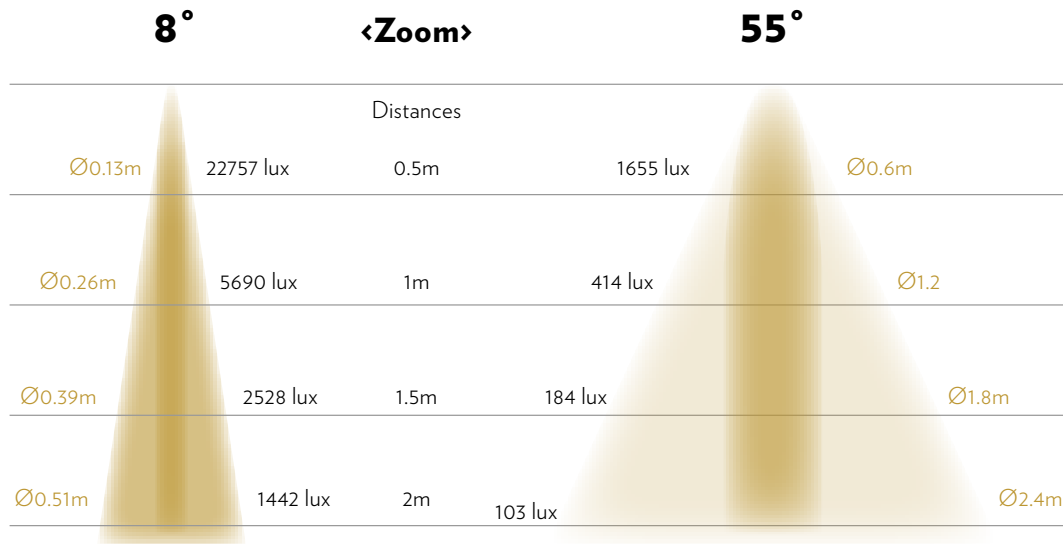



DRIVERS COMPATIBLE

Driver	Min-Max #of Fixtures	Current	Setting
SE-12-100-500-W1A	1 Fixture	CC	180mA (9-42V)
SE-20-100-700-W1A	1 Fixture	CC	180mA (9-42V)
DMX-25-150-900-U1P1	1 Fixture	CC	180mA (10-54V)
L-CT-DMX/RDW-6W-6CH	1 Fixture/Channel	CC	180mA (35.4V)

SCREW SIZES Focus and Articulation: 1.5mm
Base: 0.9mm

VARIATIONS



L-MTSA-22
6W Standalone
Spotlight

L-MFSA-22
6W Quadri-
Standalone

L-MTSP-22 6W
6W Onboard Dimmer

L-MTFS-22
6W Quadri
Framing Shutter

L-MTZFS-22
6W Quadri-Zoom
Framing Shutter

L-MSFS-20
6W Quadri-Standalone
Solid Surface

L-MSZFS-20
6W Quadri-Zoom
Standalone
Solid Surface

L-MZFSA-22
6W Quadri-Zoom
Standalone Dimmer

Please check product cut sheets for details - driver indications vary per product.