




FEATURES

- Standalone version with Magnetic & Screw base
- Focusable 8° to 55°
- Fully dimmable with onboard dimmer

6W ACCESSORIES

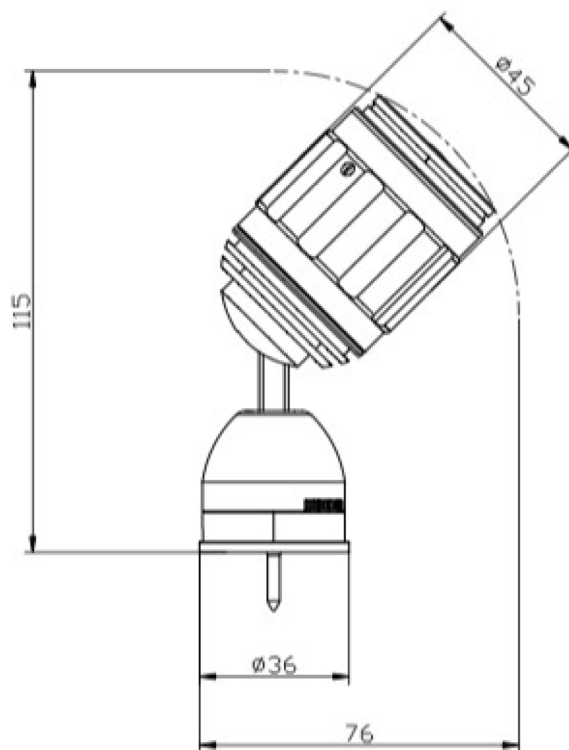

L-MTAS-20
ANGLED
SNOOT



L-MTBD-20
BARNDOR




L-MTFH-20
FILTER HOLDER

TECHNICAL DATA

Voltage	DC 11V-24V	Color Finishing	Black, White and Silver
Led Wattage	6W	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	7.8W	Storage Temperature	recommended 22°C
Input Current	650mA - 330mA	Certificates & Warranty	CE
Beam Angles	Zoomable 8° to 55°	Drivers Compatible	CV
Pan / Tilt	355°/90°	Lifespan	50000 hours
Luminous Flux & Lumens	813lm @RA97 / 255lm	Lens	Glass
Color Temperatures Available	3000K,4000K,5000K	LED	COB
Adapter	Surface mount	Class	⚡
Dimmable Options	Onboard Dimmer PWM 0-100%	Rating	IP30
CRI	97 typ	Dimensions	112*45*45 (mm)
Weight	226g	Indoor Use	only
Main Material	Aluminum	Length of Tail	145cm

PHOTOMETRICS

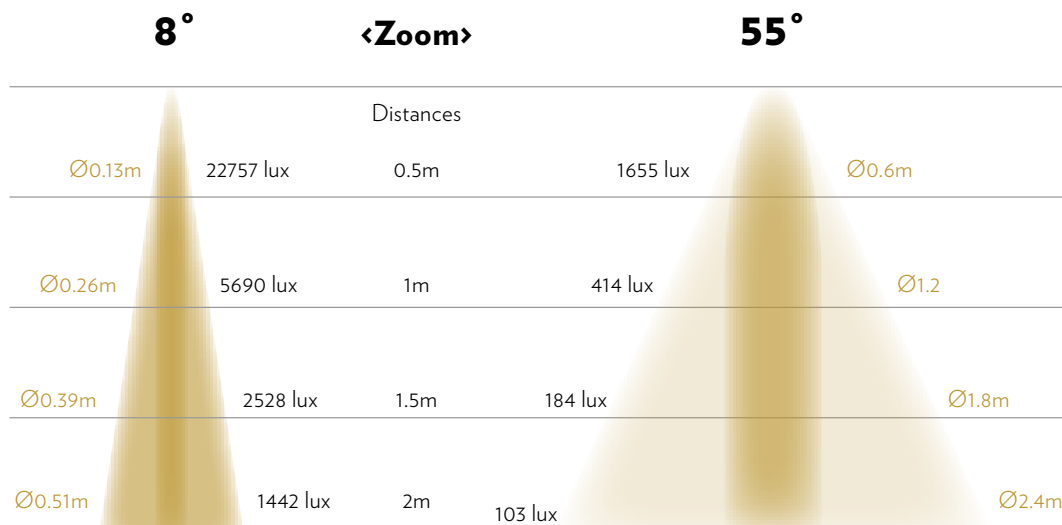

6W Spotlights can transform into Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights - with one body you can have either a spotlight or a framing shutter spotlight.



DRIVERS

Driver	# Fixtures/Driver*	Current
LPV-100-12	11 Fixtures	CV
LPV-60-12	7 Fixtures	CV
LPV-35-12	3 Fixtures	CV
NPF-90-12	10 Fixtures	CV & CC
NPF-40-12	4 Fixtures	CV & CC

SCREW SIZES Focus and Articulation: 1.5 mm
#6 flat head screws used to attach the magnetic base to the surface prior to attachment of fixture to base.

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.