






**L-UPL-10-1 STEM**

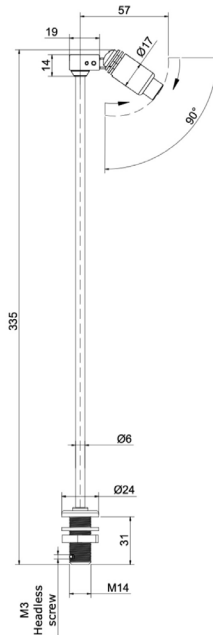

Axis clamp screw



Base Mount Option

**FEATURES**

- STEM 1 has a single stationary spot light
- Full range of accessories – Barndoors, Snoots, Filter frame, etc.
- Stem 1 comes with a 6mm rod with adjustable height.
- Focusable from 9° to 70°
- These fixtures need to be wired together in series.

**1W ACCESSORIES**



**L-MTAS-10**  
ANGLED  
SNOOT



**L-MTBD-10**  
BARNDOOR



**L-MTFH-10**  
FILTER HOLDER




**L-MTBR-10**  
BEAM REDUCER

**TECHNICAL DATA**

<b>Voltage</b>	For Constant Current Drivers with an output voltage range starting from 2.75V DC or less	<b>Working Temperature</b>	recommended 10°C to 25°C
<b>Wattage Once Used</b>	1W	<b>Storage Temperature</b>	recommended 22°C
<b>Input Current</b>	300-350mA Constant Current (connect in series)	<b>Certificates</b>	UL - CE
<b>Beam Angles</b>	Zoomable 9 to 70°	<b>Warranty</b>	5 years
<b>Pan / Tilt</b>	355°/90°	<b>Class</b>	◆◆
<b>Luminous Flux &amp; Lumens</b>	98lm @RA97 / 56 lm	<b>Rating</b>	IP30
<b>Color Temperatures</b>	3000K, 4000K, 5000K	<b>Drivers Compatible</b>	CC
<b>Adapter</b>	Surface mount	<b>Lifespan</b>	50000H
<b>Dimmable Options</b>	Dimmable with PMW driver	<b>Lens</b>	Glass
<b>CRI</b>	97 typ	<b>LED</b>	SMD CERAMIC
<b>Weight</b>	89g	<b>Dimensions</b>	360*73*24 (mm)
<b>Main Material</b>	Aluminum	<b>Indoor Use</b>	Only
<b>Color Finishing</b>	Black, White, Silver, Gold	<b>Length of Tail</b>	145cm

These fixtures need to be wired together in series.

**PHOTOMETRICS**

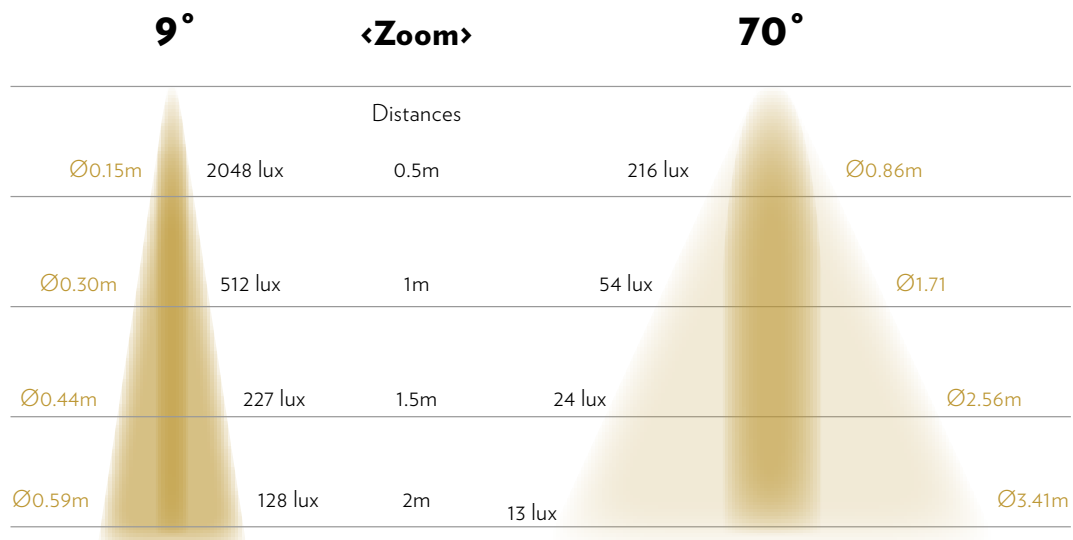




**DRIVERS COMPATIBLE**

**L-UPL-10-1**

Driver	Min-Max #of Fixtures	Current	Setting
SE-10-350-700-W1A	1-4 Stems	CC	350mA (2-12V)
SE-12-350-700-W1A	5-8 Stems	CC	350mA (10-24V)
SE-30-200-800-W1A	4-15 Stems	CC	350mA (9-42V)
SE-40-300-1050-W1A	4-15 Stems	CC	350mA (9-42V)
DMX-25-150-900-U1P1	4-18 Stems	CC	350mA (10-54V)
L-CT-DMX/RDW-1-3W-6CH	1-6 Stems	CC	350mA (3-21V)

**SCREW SIZES** Focus and Articulation: 0.9mm

**VARIATIONS**

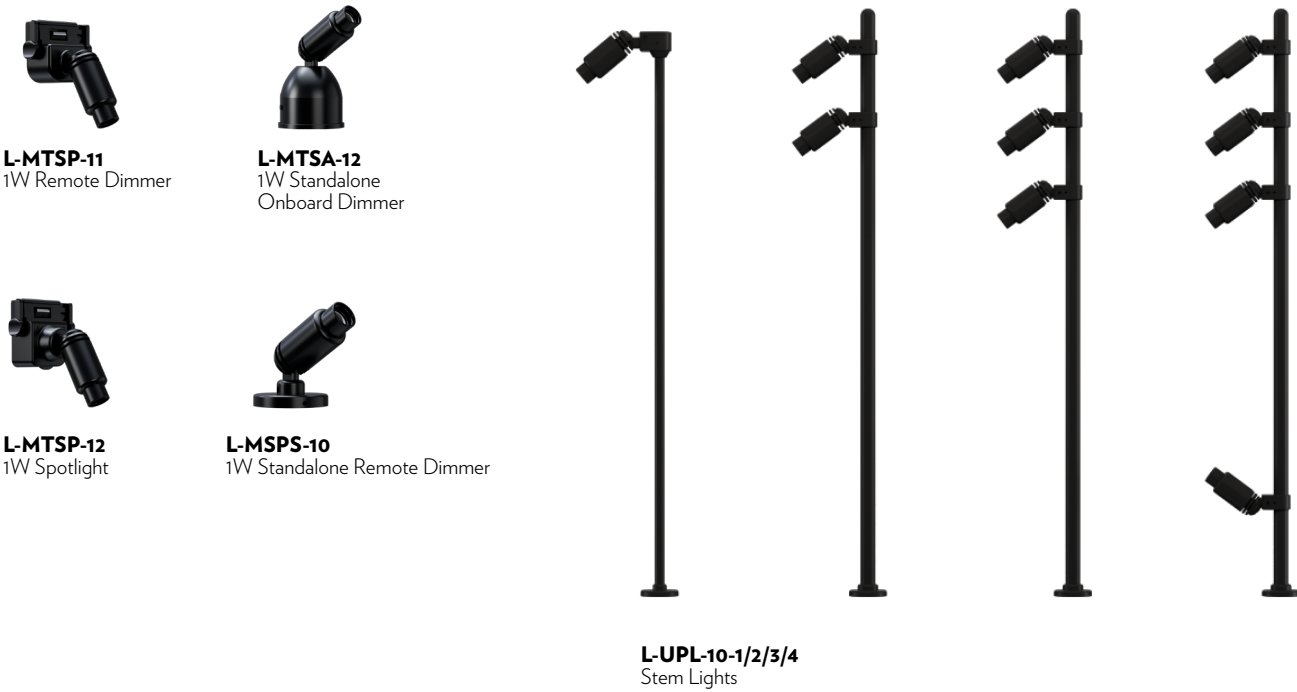

Please check product cut sheets for details - driver indications vary per product.