

FEATURES

- Fully focusable 9° to 70°
- Accepts all 1W accessories (barndoor, snoots, angled, snoots)
- Can add a dimmer to the driver
- Magnet base option available
- These fixtures need to be wired together in series.

1W ACCESSORIES



L-MTAS-10
ANGLED
SNOOT



L-MTBD-10
BARNDOOR



L-MTFH-10
FILTER HOLDER




L-MTBR-10
BEAM REDUCER

TECHNICAL DATA

Voltage	For Constant Current Drivers with an output voltage range starting from 2.75V DC or less	Color Finishing	Black, White and Silver
Wattage Once Used	1W	Working Temperature	recommended 10°C to 25°C
Input Current	300-350mA Constant Current (connect in series)	Storage Temperature	recommended 22°C
Beam Angles	Zoomable 9 to 70°	Certificates	UL-CE
Pan / Tilt	355°/90°	Waranty	5 years
Luminous Flux & Lumens	98lm @RA97 / 56 lm	Class	⚡
Color Temperatures Available	3000K,4000K,5000K	Rating	IP30
Adapter	Surface mount	Drivers Compatible	CC
Dimmable Options	Dimmable with PWM driver	Lifespan	50000H
CRI	97 typ	Lens	Glass
Main Material	Aluminum	LED	SMD Ceramic
Indoor Use	Only	Length of Tail	145cm

These fixtures need to be wired together in series.

PHOTOMETRICS

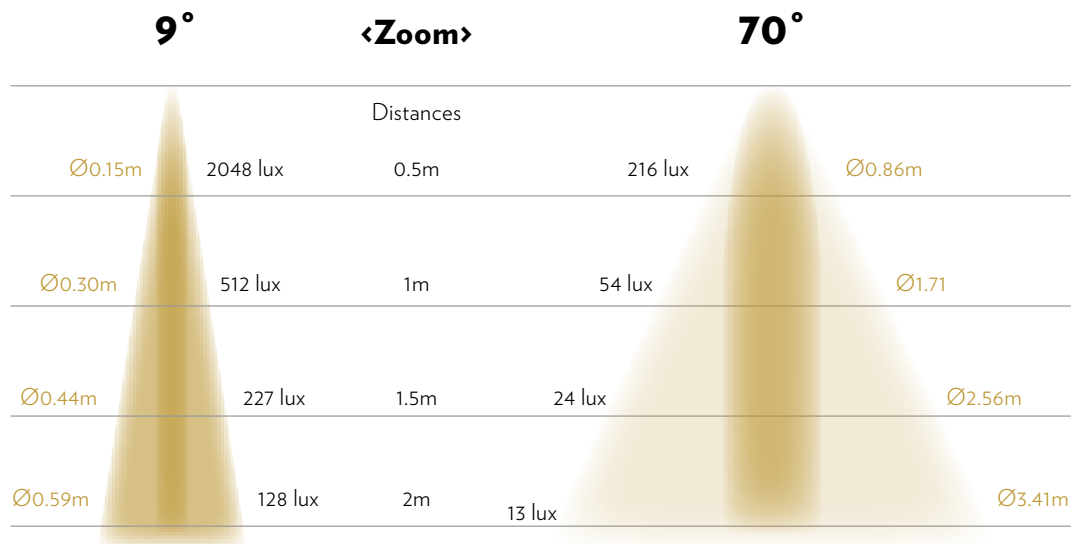



DRIVERS

Driver	Min - Max # Fixtures	Current	Setting
AD-36-200-1200-U1P1	3-18 Fixtures	CC	350mA (10-54V)
SE-10-350-700-W1A	1-4 Fixtures	CC	350mA (2-12V)
SE-12-350-700-W1A	4-8 Fixtures	CC	350mA (10-24V)
SE-20-100-700-W1A1	4-15 Fixtures	CC	350mA (9-42V)
SE-30-200-800-W1A	4-15 fixtures	CC	350mA (9-42V)
SE-40-300-1050-W1A	4-15 Fixtures	CC	350mA (9-42V)
DMX-25-150-900-U1P1	4-18 Fixtures	CC	350mA (10-54V)
L-CT-DMX/RDW-1-3W-6CH	1-6 Fixtures/Channel	CC	350mA (3-21V)

SCREW SIZES Focus and Articulation: 0.9mm
Base: 0.9mm

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.