

FEATURES

- Our micro track head in a stand-alone configuration dual base magnetic and screw in base.
- Accepts all accessories for 1W
- Fully focusable 9° to 70°

1W ACCESSORIES



L-MTAS-10
ANGLED
SNOOT



L-MTBD-10
BARNDOOR



L-MTFH-10
FILTER HOLDER




L-MTBR-10
BEAM REDUCER

TECHNICAL DATA

Voltage	DC 12v	Color Finishing	Black, White and Silver
Led Wattage	1W	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	1.2W	Storage Temperature	recommended 22°C
Input Current	100mA	Certificates & Warranty	UL - CE / 5 years
Beam Angles	Zoomable 9 to 70°	Drivers Compatible	CV
Pan / Tilt	355°/90°	Lifespan	50000 hours
Luminous Flux & Lumens	98lm @RA97 / 56 lm	Lens	Glass
Color Temperatures Available	3000K,4000K,5000K	LED	SMD CERAMIC
Adapter	Surface mount	Class	⚡
Dimmable Options	On board Dimmer: PWM, range 0-100%	Rating	IP30
CRI	97 typ	Dimensions	83*40*44 (mm)
Weight	114g	Indoor Use	only
Main Material	Aluminum	Length of Tail	145cm

PHOTOMETRICS

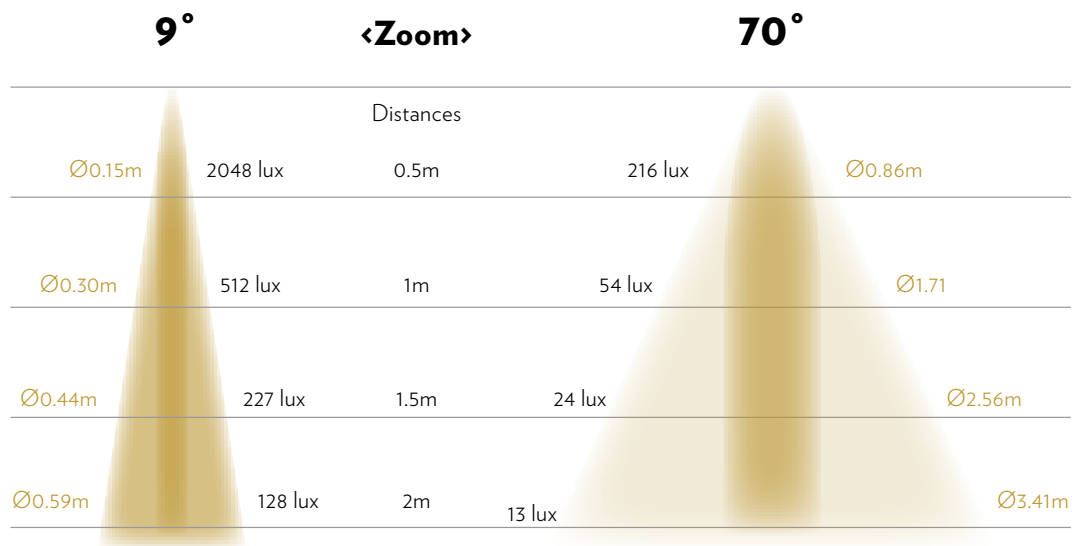




DRIVERS

Driver	# Fixtures/Driver*	Current
LPV-100-12	66 Fixtures	CV
LPV-60-12	40 Fixtures	CV
LPV-35-12	21 Fixtures	CV
NPF-90-12	60 Fixtures	CV & CC
NPF-40-12	26 Fixtures	CV & CC

SCREW SIZES Focus and Articulation: 0.9mm
#6 flat head screws used to attach the magnetic base to the surface prior to attachment of fixture to base.

VARIATIONS

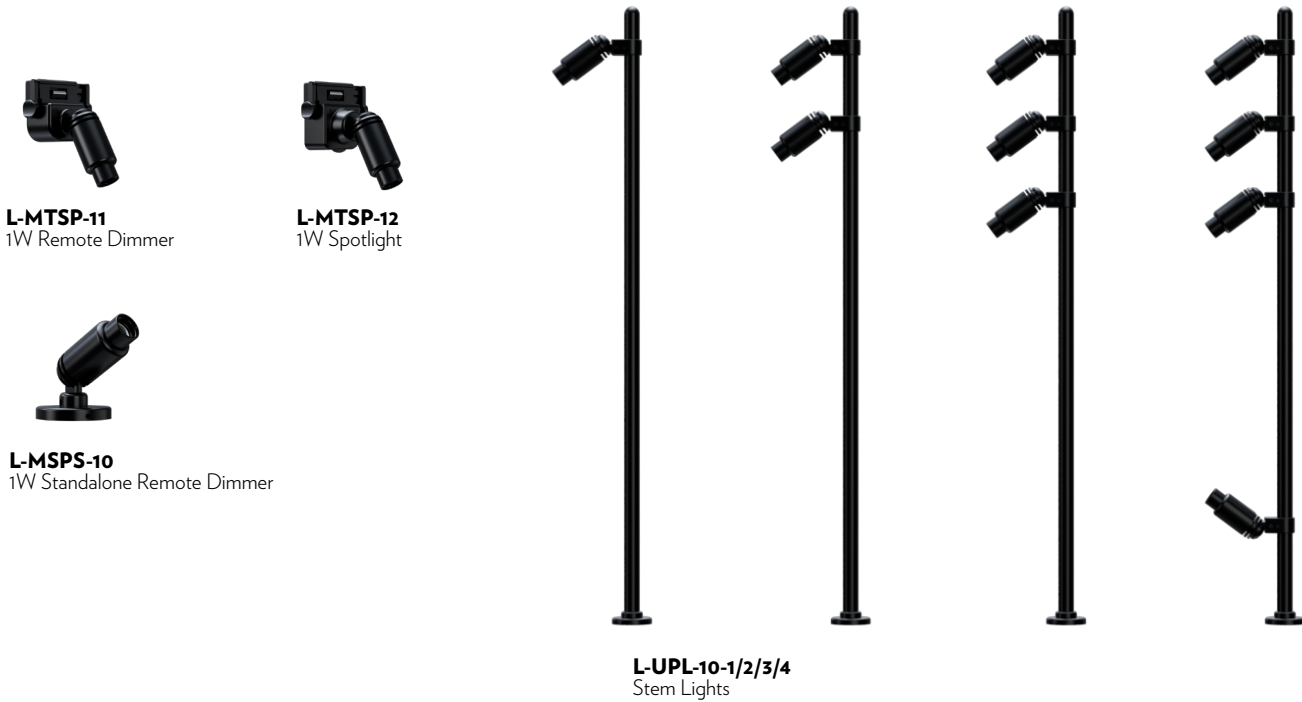

Please check product cut sheets for details - driver indications vary per product.