

FEATURES

- Fully compatible with all MicroTrack systems
- Fully focusable 8° to 56°
- No onboard dimmer - Can dim the whole track.
- Accessories include Barndoors, Snoots, & Filter frames

3W ACCESSORIES



L-MTFH-01
FILTER
HOLDER



L-MTAR-01
ARCHITECTURAL
SNOOT



L-MTSN-01
CONE SNOOT



L-MTSC-01
ANGLED SNOOT



L-MTAS-01
BARNDOOR




L-MTBS-01
BOOSTER



TECHNICAL DATA

Voltage	12 VDC	Color Finishing	Black, White and Silver
Led Wattage	3W	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	3.8W	Storage Temperature	recommended 22°C
Input Current	340mA	Certificates / Standard	UL, CE
Beam Angles	Zoomable 8° to 56°	Warranty	5 years
Pan / Tilt	355° / 90°	Class	III
Luminous Flux & Lumens	270lm @RA97 / 130 lm	Rating	IP30
Color Temperatures Available	3000K / 4000K / 5000K	Drivers Compatible Cc/ Cv	CV
Adapter	Luxam Micro Track	Lifespan	50000 hours
Dimmable Options	External dimming with PWM 12V track driver	Lens	Glass
CRI	97 typ	LED	SMD CERAMIC
Weight	82g	Dimensions	81 x 44 x 44 (mm)
Main Material	Aluminum	Indoor Use	only

PHOTOMETRICS

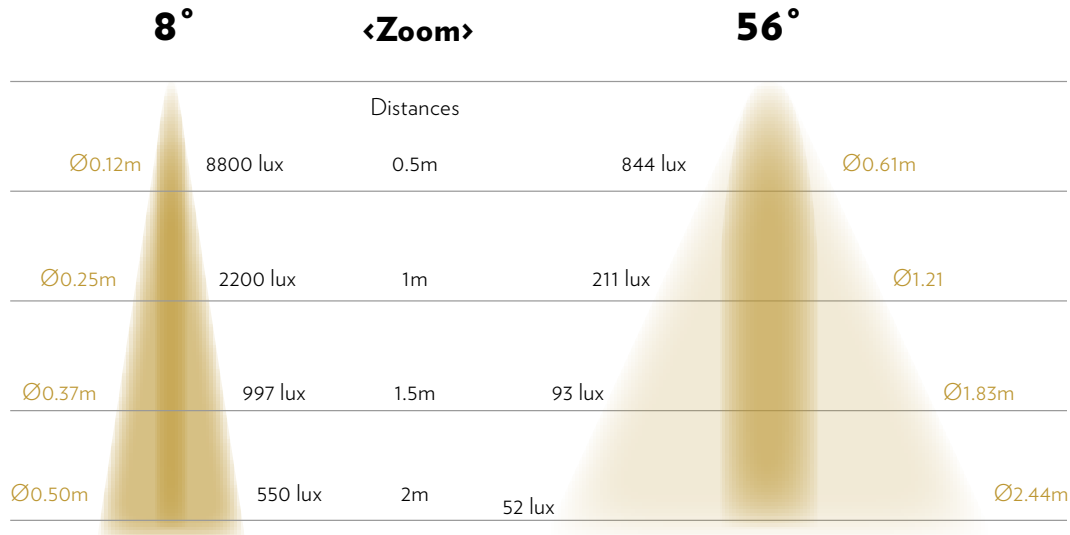

DRIVERS COMPATIBLE

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LM-60-12-U1A2	60W	48W	12 Fixtures	CV
LM-60-12-U1M2 (DMX DRIVER)	60W	48W	40 Fixtures	CV

SCREW SIZES Focus and Articulation: 1.5mm

VARIATIONS



L-MTSA-02
3W Standalone
Onboard Dimmer



L-MSPS-00
3W Standalone
Head



L-MTFS-02
3W Quadri -
Framing Shutter Spotlight



L-MTSP-02
3W Spotlight

Please check product cut sheets for details - driver indications vary per product.