

FEATURES

- Fully compatible with all MicroTrack systems
- Fully focusable 8° to 55°
- No onboard dimmer - Can dim the whole track.
- Accessories include Barndoors, Snoots, & Filter frames

6W ACCESSORIES



L-MTAS-20
ANGLED
SNOOT



L-MTBD-20
BARNDOOR




L-MTFH-20
FILTER HOLDER



TECHNICAL DATA

Voltage	11v -24 VDC	Color Finishing	Black, White and Silver
Led Wattage	6W	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	7.6W	Storage Temperature (specify C or F)	recommended 22°C
Input Current	650mA - 330mA	Certificates	CE
Beam Angles	Zoomable 8° to 55°	Warranty	5 years
Pan / Tilt	355° / 90°	Class	III
Luminous Flux & Lumens	813lm @RA97 / 255lm	Rating	IP30
Color Temperatures Available	3000K/ 4000K/ 5000K	Drivers Compatible CC/ CV	CV
Adapter	Luxam Micro Track	Lifespan	50000H
Dimmable Options	External dimming with PWM 12V track driver	Lens	Glass
CRI	97 typ	LED	COB
Weight	144g	Dimensions	103*47*44 (mm)
Main Material	Aluminum	Indoor Use	only

PHOTOMETRICS

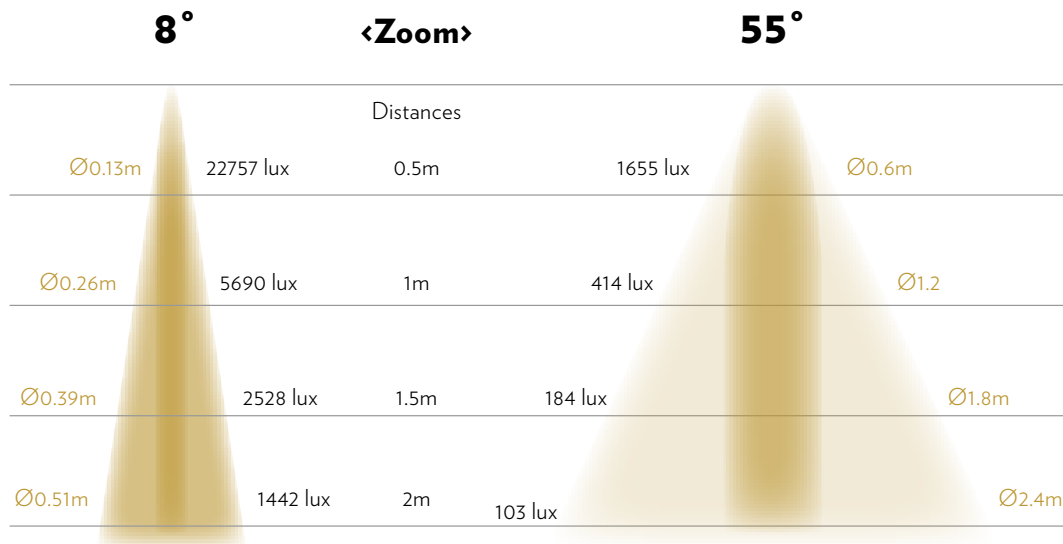



6W Spotlights can transform into Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights - with one body you can have either a spotlight or a framing shutter spotlight.



DRIVERS COMPATIBLE

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LPV-100-12	100W	80W	10 Fixtures	CV
LPV-60-12	60W	48W	6 Fixtures	CV
LPV-35-12	35W	28W	3 Fixtures	CV
NPF-90-12	90W	72W	9 Fixtures	CV & CC
NPF-40-12	40W	32W	4 Fixtures	CV & CC

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.