

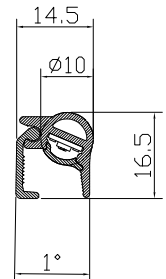
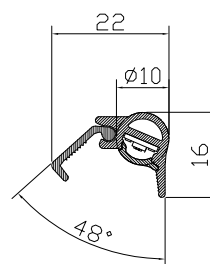


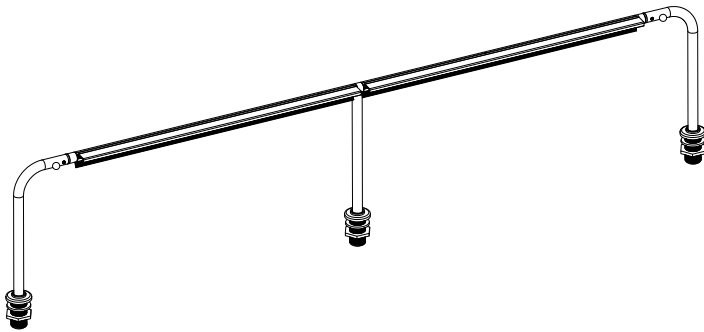

**SCAN**  
TO VIEW VIDEO

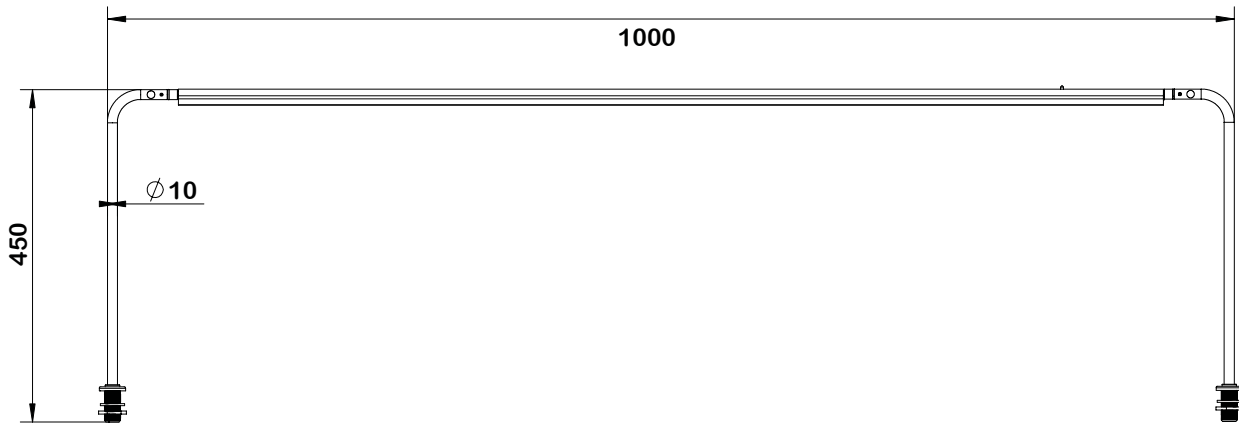

**FEATURES**

- Available in 1M, 1.5M, and 2M
- 30-120° beamspread using adjustable barndoors
- 12V input with 15, 23 and 30W output
- 3000K, 4000K, or 5000K
- Standard color is Black Anodized
- Adjustable height 5cm-2 meters


**TECHNICAL DATA**

<b>Voltage</b>	12 VDC	<b>Working Temperature</b>	recommended 10°C to 25°C
<b>Wattage Once Used</b>	12W/meter	<b>Storage Temperature</b>	recommended 22°C
<b>Input Current</b>	1000mA/meter	<b>Certificates</b>	UL - CE
<b>Beam Angles</b>	90°	<b>Warranty</b>	5 years
<b>Tilt</b>	360°	<b>Rating</b>	IP30
<b>Luminous Flux &amp; Lumens</b>	456 lm/meter	<b>Drivers Compatible</b>	CV
<b>Color Temperatures</b>	3000K, 4000K, 5000K	<b>Lifespan</b>	50000H
<b>Adapter</b>	Surface mount	<b>Lens</b>	PC
<b>Dimmable Options</b>	Dimmable with PWM driver	<b>LED</b>	SMD Ceramic
<b>CRI</b>	97+	<b>Dimensions</b>	-
<b>Main Material</b>	Aluminum	<b>Indoor Use</b>	Only
<b>Color Finishing</b>	Black, White, Silver, Gold	<b>Length of Tail</b>	145cm

**PHOTOMETRICS**

**LMBA TALEA – 1000mm**

**112°**

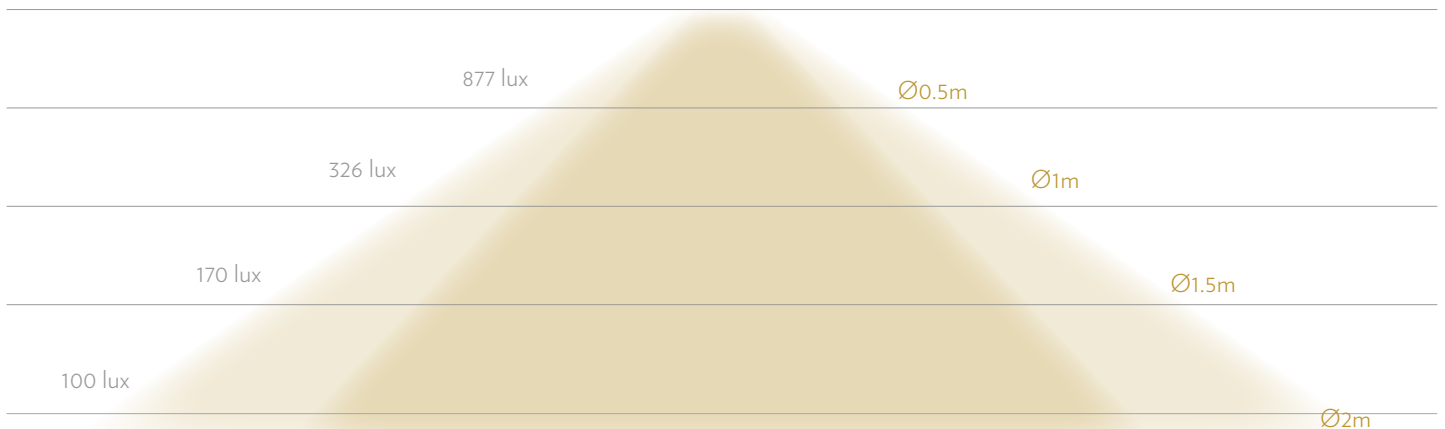

**DRIVERS COMPATIBLE**

**L-MBA - 1000mm**

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LM-60-12-U1A2	60W	48W	3 Fixtures	CV

SCREW SIZES Barn Door and Base: 1.5mm

**L-MBA - 1500mm**

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LM-60-12-U1A2	60W	48W	2 Fixtures	CV

SCREW SIZES Barn Door and Base: 1.5mm