


FEATURES

- Fully compatible with all Micro Track systems
- Fully dimmable with onboard dimmer

TECHNICAL DATA


Voltage	11v -24VDC	Color Finishing	Black, White and Silver
Led Wattage	6W	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	7.8W	Storage Temperature	recommended 22°C
Input Current	650mA - 330mA	Certificates & Warranty	CE / 5 years
Beam Angles	55°	Drivers Compatible	CV
Pan / Tilt	355°/90°	Lifespan	50000 hours
Color Temperatures Available	3000K,4000K,5000K	Lens	Glass
Adapter	Surface Mount	LED	COB
Dimmable Options	Onboard Dimmer PWM 0-100%	Class	⚡
CRI	97 typ	Rating	IP30
Main Material	Aluminum	Indoor Use	only

PHOTOMETRICS

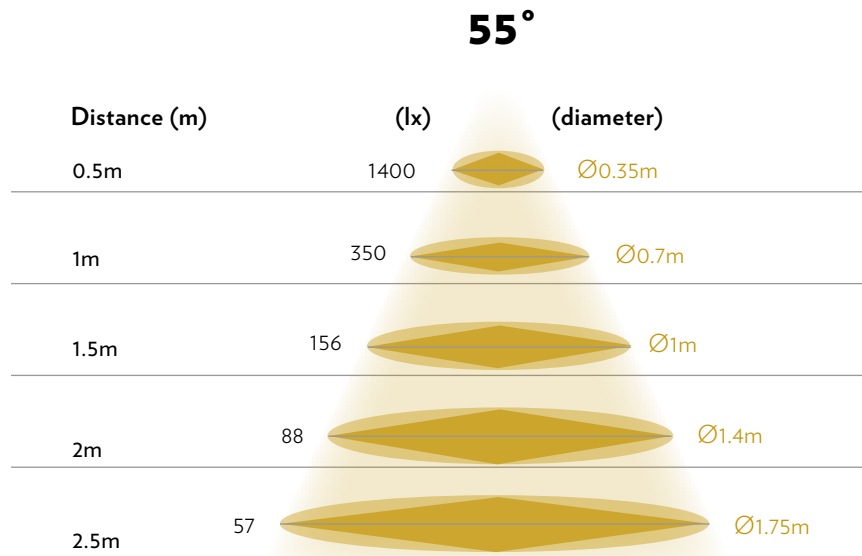




6W Spotlights can transform into Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights - with one body you can have either a spotlight or a framing shutter spotlight.

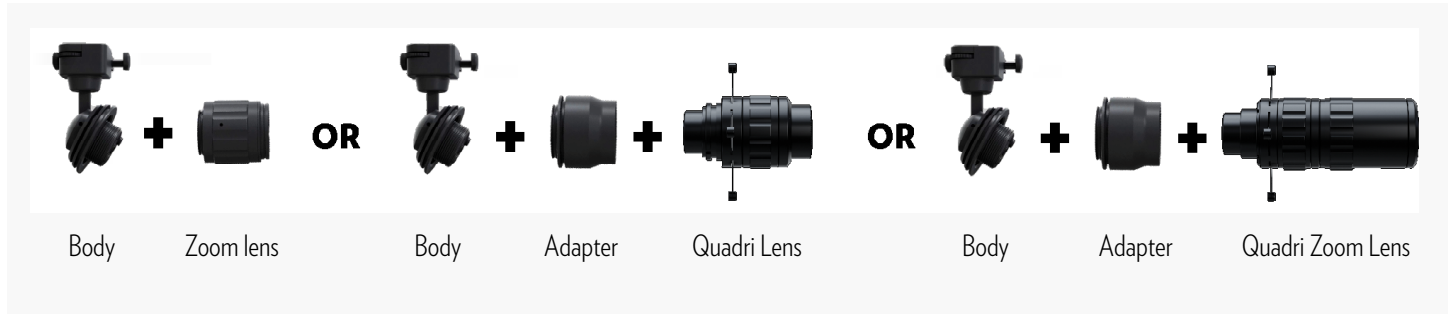

GOBO DETAILS

A gobo adds depth and texture to your setup. The L-MFSA-22 6W Quadri Standalone accepts 19.7mm outer diameter, 14.5mm inner diameter, 0.3mm-1mm thick glass or stainless steel gobos, including full color glass and plastic options.

LENS CODES: L-MTZQ-1536 and L-MTQD-55

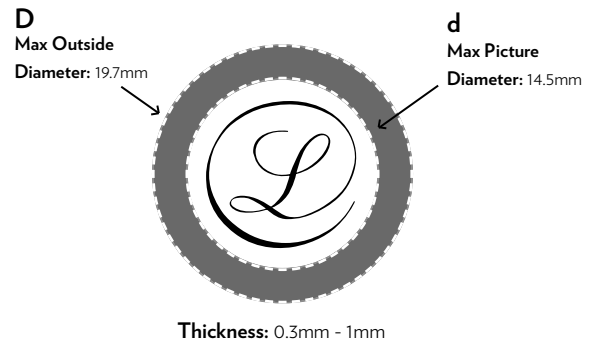

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.