

**FEATURES**


- Total weight: 340gr
- Max size: 166\*45\*38 (mm)
- These fixtures need to be wired together in series.

**TECHNICAL DATA**

<b>Voltage:</b>	For Constant Current Driver 36V DC output voltage minimum	<b>Working Temperature</b>	recommended 10°C to 25°C
<b>Wattage Once Used:</b>	6W	<b>Storage Temperature (Specify C Or F)</b>	recommended 22°C
<b>Input Current:</b>	170mA Constant Current (connect in series)	<b>Certificates / Standard</b>	CE
<b>Beam Angles:</b>	18° - 37°	<b>Warranty</b>	5 years
<b>Pan / Tilt:</b>	355° / 90°	<b>Drivers Compatible Cc/ Cv</b>	CC
<b>Color Temperatures Available:</b>	3000K/ 4000K/ 5000K	<b>Lifespan</b>	50000H
<b>Adapter:</b>	Surface mount	<b>Lens</b>	Glass
<b>Dimmable Options:</b>	Dimmable with PWM driver	<b>LED</b>	COB
<b>CRI</b>	97 typ	<b>Class</b>	III
<b>Weight</b>	340gr	<b>Rating</b>	IP30
<b>Main Material</b>	Aluminum	<b>Dimensions</b>	166*45*38 (mm)
<b>Color Finishing</b>	Black, White and Silver	<b>Indoor use</b>	only

These fixtures need to be wired together in series.

**PHOTOMETRICS**

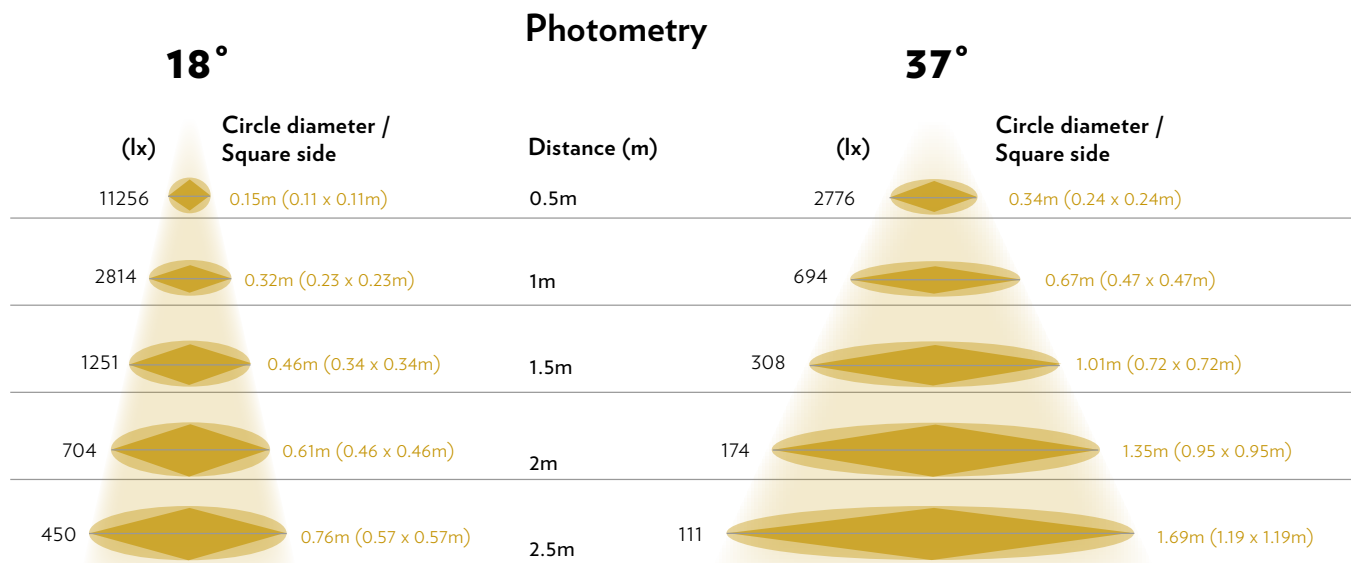


6W Spotlights can transform into Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights - with one body you can have either a spotlight or a framing shutter spotlight.



**GOBO DETAILS**

A gobo adds depth and texture to your setup. The L-MSZFS-20 6W Quadri Zoom Framing Shutter accepts 19.7mm outer diameter, 14.5mm inner diameter, 0.3mm-1mm thick glass or stainless steel gobos, including full color glass and plastic options.

**LENS CODES:** L-MTZQ-1536 and L-MTQD-55

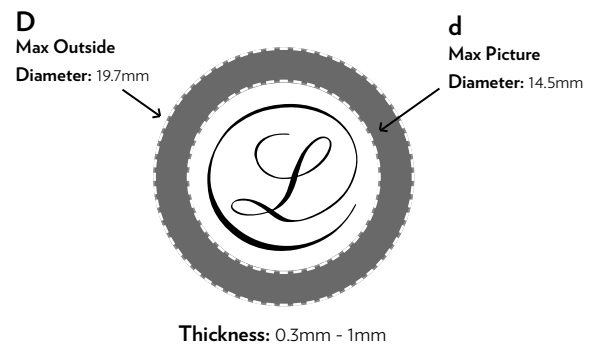

**DRIVERS COMPATIBLE**

Driver	Min-Max #of Fixtures	Current	Setting
SE-12-100-500-W1A	1 Fixture	CC	180mA (9-42V)
SE-20-100-700-W1A	1 Fixture	CC	180mA (9-42V)
DMX-25-150-900-U1P1	1 Fixture	CC	180mA (10-54V)
L-CT-DMX/RDW-6W-6CH	1 Fixture/Channel	CC	180mA (35.4V)

**SCREW SIZES** Focus and Articulation: 1.5mm  
Base: 0.9mm

**VARIATIONS**



Please check product cut sheets for details - driver indications vary per product.