

## FEATURES

- Fully compatible with all MicroTrack systems
- Fully focusable 8° to 56°
- No onboard dimmer - Can dim the whole track.
- Accessories include Barndoors, Snoots, & Filter frames

## 3W ACCESSORIES



L-MTFH-01  
FILTER  
HOLDER



L-MTAR-01  
ARCHITECTURAL  
SNOOT



L-MTSN-01  
CONE SNOOT



L-MTAS-01  
ANGLED SNOOT



L-MTBD-01  
BARNDOOR




L-MTBS-01  
BOOSTER

**TECHNICAL DATA**

|                                     |  |                                  |                          |
|-------------------------------------|--|----------------------------------|--------------------------|
| <b>Voltage</b>                      | 12 VDC                                     | <b>Color Finishing</b>           | Black, White and Silver  |
| <b>Led Wattage</b>                  | 3W   | <b>Working Temperature</b>       | recommended 10°C to 25°C |
| <b>Wattage Once Used</b>            | 3.8W                                       | <b>Storage Temperature</b>       | recommended 22°C         |
| <b>Input Current</b>                | 340mA                                      | <b>Certificates / Standard</b>   | UL, CE                   |
| <b>Beam Angles</b>                  | Zoomable 8° to 56°                         | <b>Warranty</b>                  | 5 years                  |
| <b>Pan / Tilt</b>                   | 355° / 90°                                 | <b>Class</b>                     | III                      |
| <b>Luminous Flux &amp; Lumens</b>   | 270lm @RA97 / 130 lm                       | <b>Rating</b>                    | IP30                     |
| <b>Color Temperatures Available</b> | 3000K / 4000K / 5000K                      | <b>Drivers Compatible Cc/ Cv</b> | CV                       |
| <b>Adapter</b>                      | Luxam Micro Track                          | <b>Lifespan</b>                  | 50000 hours              |
| <b>Dimmable Options</b>             | External dimming with PWM 12V track driver | <b>Lens</b>                      | Glass                    |
| <b>CRI</b>                          | 97 typ                                     | <b>LED</b>                       | SMD CERAMIC              |
| <b>Weight</b>                       | 82g  | <b>Dimensions</b>                | 81 x 44 x 44 (mm)        |
| <b>Main Material</b>                | Aluminum                                   | <b>Indoor Use</b>                | only                     |

**PHOTOMETRICS**

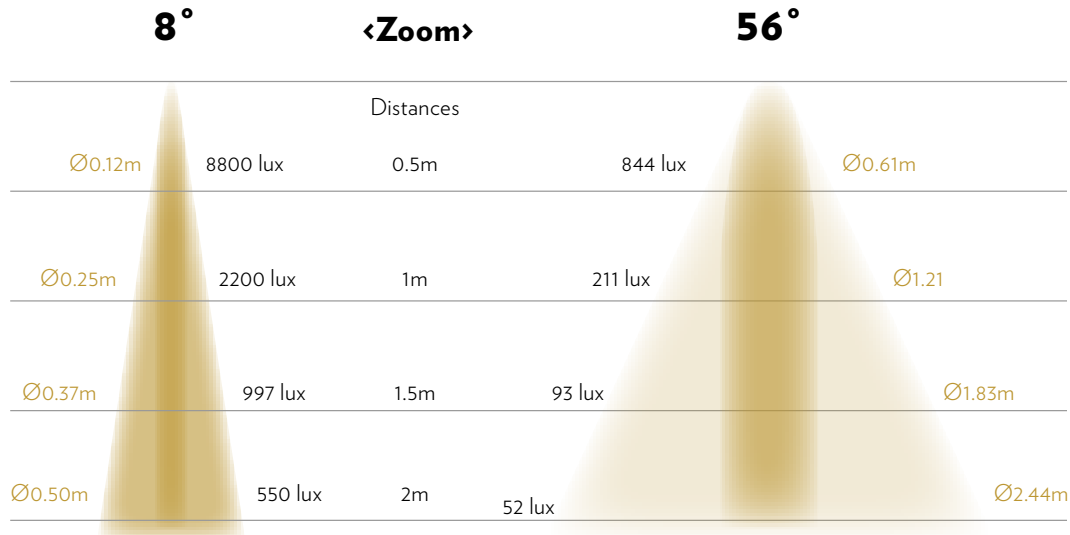

**DRIVERS COMPATIBLE**

| Driver                        | Watts/Driver | 80% Capacity | # Fixtures/Driver* | Current |
|-------------------------------|--------------|--------------|--------------------|---------|
| LM-60-12-U1A2                 | 60W          | 48W          | 12 Fixtures        | CV      |
| LM-60-12-U1M2<br>(DMX DRIVER) | 60W          | 48W          | 12 Fixtures        | CV      |

**SCREW SIZES** Focus and Articulation: 1.5mm

**VARIATIONS**



**L-MTSA-02**  
3W Standalone  
Onboard Dimmer



**L-MSPS-00**  
3W Standalone  
Head



**L-MTSP-02**  
3W Spotlight

Please check product cut sheets for details - driver indications vary per product.