




**SCAN**  
TO VIEW VIDEO

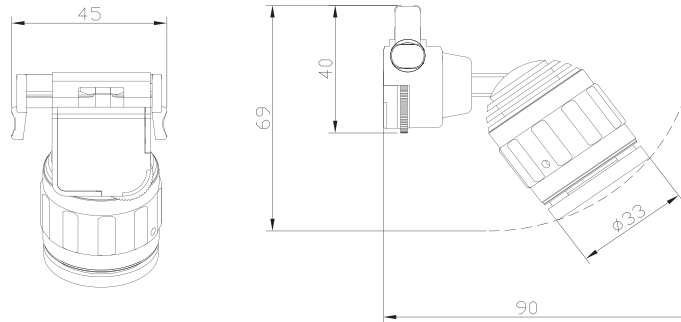

## FEATURES

- Fully compatible with all MicroTrack systems
- Focusable 8° to 56°
- Fully Dimmable with onboard dimmer
- Full range of accessories including Barndoors, Snoots, Filter frames & more

## 3W ACCESSORIES



L-MTFH-01  
FILTER  
HOLDER



L-MTAR-01  
ARCHITECTURAL  
SNOOT  
LENS



L-MTSN-01  
SNOOT



L-MTSC-01  
CONE SNOOT



L-MTAS-01  
ANGLED SNOOT



L-MTBD-01  
BARNDOOR




L-MTBS-01  
BOOSTER

**TECHNICAL DATA**

<b>Voltage</b>	12 VDC	<b>Color Finishing</b>	Black, White and Silver
<b>Led Wattage</b>	3W	<b>Working Temperature</b>	recommended 10°C to 25°C
<b>Wattage Once Used</b>	3.8W	<b>Storage Temperature</b>	recommended 22°C
<b>Input Current</b>	340mA	<b>Certificates / Standard</b>	UL, CE
<b>Beam Angles</b>	Zoomable 8° to 56°	<b>Warranty</b>	5 years
<b>Pan / Tilt</b>	355° / 90°	<b>Drivers Compatible</b>	CV
<b>Luminous Flux &amp; Lumens</b>	270lm @RA97 / 130lm	<b>Lifespan</b>	50000 hours
<b>Color Temperatures Available</b>	3000K/4000K/5000K	<b>Lens</b>	Glass
<b>Adapter</b>	Luxam Micro Track	<b>LED</b>	SMD CERAMIC
<b>Dimmable Options</b>	On board Dimmer: PWM, range 0-100%	<b>Class</b>	III
<b>CRI</b>	97 typ	<b>Rating</b>	IP30
<b>Weight</b>	84g	<b>Dimensions</b>	81*44*44 (mm)
<b>Main Material</b>	Aluminum	<b>Indoor Use</b>	only

**PHOTOMETRICS**

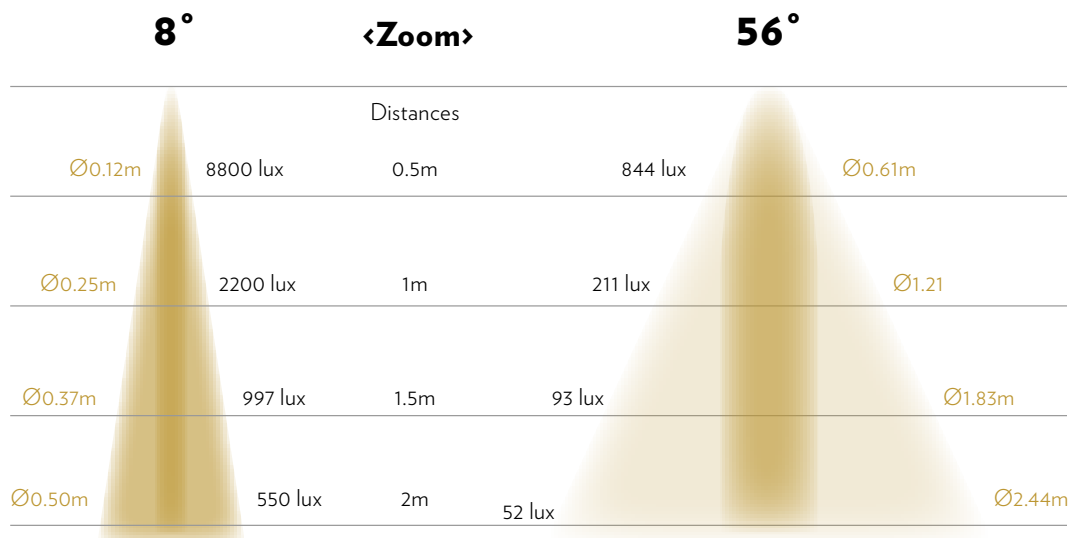



**DRIVERS COMPATIBLE**

Driver	# Fixtures/Driver*	Current
LPV-100-12	21 Fixtures	CV
LPV-60-12	12 Fixtures	CV
LPV-35-12	6 Fixtures	CV
NPF-90-12	18 Fixtures	CV & CC
NPF-40-12	8 Fixtures	CV & CC

**SCREW SIZES** Focus and Articulation: 1.5mm

**VARIATIONS**



**L-MTSA-02**  
3W Standalone  
Onboard Dimmer



**L-MSPS-00**  
3W Standalone  
Remote Dimmer



**L-MTSP-01-ND**  
3W Spotlight  
No Dimmer