

FEATURES



- Fully compatible with all MicroTrack systems
- Fully focusable 9° to 70°
- No onboard dimmer - Can dim the whole track.
- Accessories include Barndoors, Snoots, & Filter frames

1W ACCESSORIES



L-MTAS-10
ANGLED
SNOOT



L-MTBD-10
BARNDOOR




L-MTFH-10
FILTER HOLDER




L-MTBR-10
BEAM REDUCER

TECHNICAL DATA

Voltage	12 VDC	Color Finishing	Black, White and Silver
Led Wattage	1W	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	1.2W	Storage Temperature	recommended 22°C
Input Current	100mA	Certificates / Standard	UL, CE
Beam Angles	Zoomable 9 to 70°	Warranty	5 years
Pan / Tilt	355° / 90°	Drivers Compatible	
Luminous Flux & Lumens	98lm @RA97 / 56 lm	Lifespan	IP30
Color Temperatures Available	3000K / 4000K / 5000K	Lens	CV
Adapter	Luxam Micro Track	LED	50000 hours
Dimmable Options	External dimming with PWM 12V track driver	Class	Glass
CRI	97 typ	Rating	SMD CERAMIC
Weight	37g	Dimensions	75*40*44 (mm)
Main Material	Aluminum	Indoor Use	only

PHOTOMETRICS

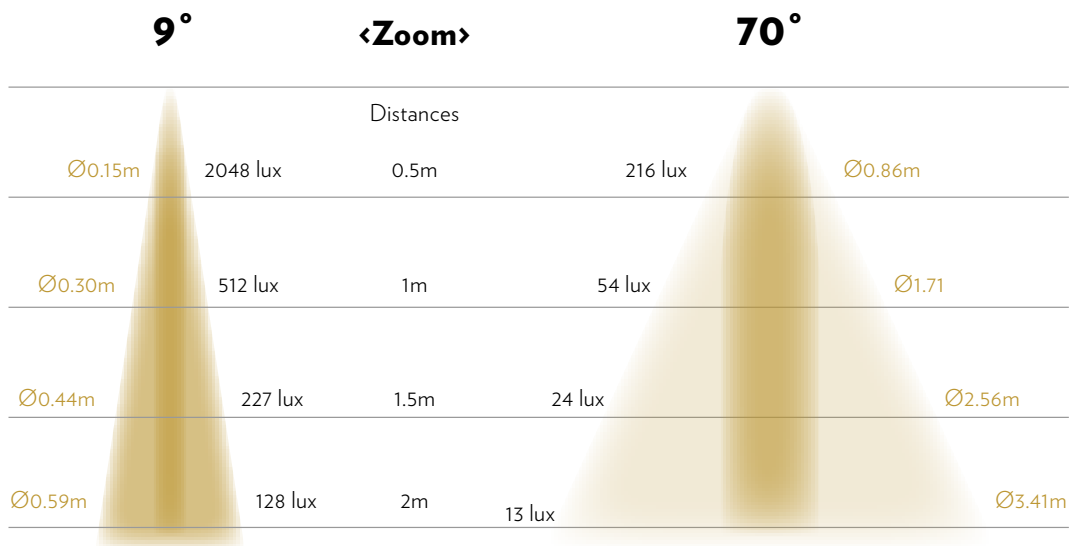



DRIVERS COMPATIBLE

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LM-60-12-U1A2	60W	48W	40 Fixtures	CV
LM-60-12-U1M2 (DMX Driver)	60W	48W	40 Fixtures	CV

Screw sizes Focus and Articulation: 0.9mm

*The number of fixtures per driver is calculated based on 80% capacity for safety reasons.

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.