

FEATURES

- Fully compatible with all MicroTrack systems
- Fully focusable 9° to 70°
- Fully dimmable with onboard dimmer
- Accessories include Barndoors, Snoots, & Filter frames

1W ACCESSORIES



L-MTAS-10
ANGLED
SNOOT



L-MTBD-10
BARNDOOR



L-MTFH-10
FILTER HOLDER




L-MTBR-10
BEAM REDUCER

TECHNICAL DATA

Voltage	12 VDC	Color Finishing	Black, White and Silver
Led Wattage	1W	Working Temperature	recommended 10°C to 25°C
Wattage Once Used	1.2W	Storage Temperature	recommended 22°C
Input Current	100mA	Certificates / Standard	UL, CE
Beam Angles	Zoomable 9 to 70°	Warranty	5 years
Pan / Tilt	355° / 90°	Drivers Compatible	CV
Luminous Flux & Lumens	98lm @RA97 / 56 lm	Lifespan	50000 hours
Color Temperatures Available	3000K/4000K/5000K	Lens	Glass
Adapter	Luxam Micro Track	LED	SMD CERAMIC
Dimmable Options	On board Dimmer: PWM, range 0-100%	Class	⬡
CRI	97 typ	Rating	IP30
Weight	39g	Dimensions	75*40*44 (mm)
Main Material	Aluminum	Indoor Use	only

PHOTOMETRICS

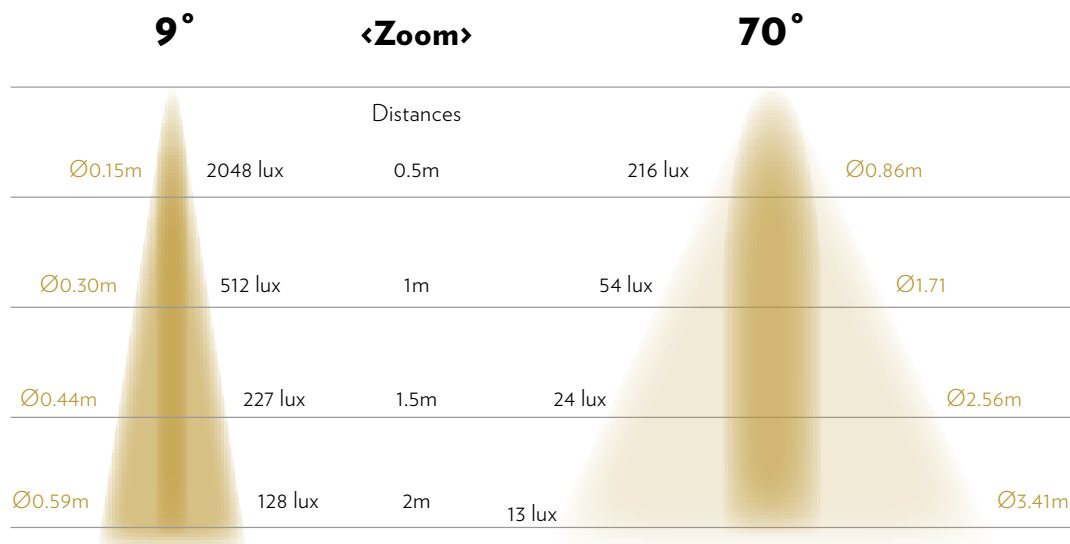



DRIVERS COMPATIBLE

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LPV-100-12	100W	80W	66 Fixtures	CV
LPV-60-12	60W	48W	40 Fixtures	CV
LPV-35-12	35W	28W	21 Fixtures	CV
NPF-90-12	90W	72W	60 Fixtures	CV & CC
NPF-40-12	40W	32W	26 Fixtures	CV & CC

SCREW SIZES Focus and Articulation: 0.9mm

*The number of fixtures per driver is calculated based on 80% capacity for safety reasons.

VARIATIONS




L-MTSP-11
1W Remote Dimmer



L-MTSA-12
1W Standalone
Onboard Dimmer



L-MSPS-10
1W Standalone Remote Dimmer

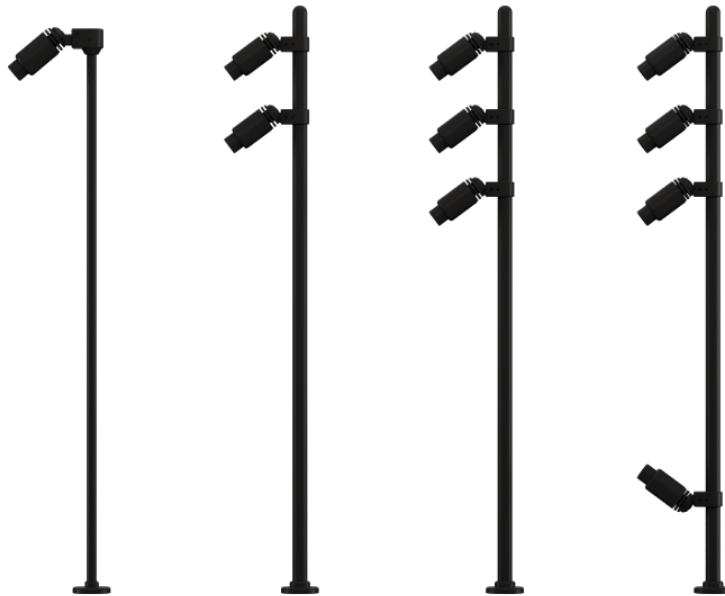

L-UPL-10-1/2/3/4
Stem Lights

Please check product cut sheets for details - driver indications vary per product.