

## FEATURES

- Fully compatible with all MicroTrack systems
- Fully focusable 8° to 55°
- No onboard dimmer - Can dim the whole track.
- Accessories include Barndoors, Snoots, & Filter frames

## 6W ACCESSORIES



**L-MTAS-20**  
ANGLED  
SNOOT



**L-MTBD-20**  
BARNDOOR




**L-MTFH-20**  
FILTER HOLDER


**TECHNICAL DATA**

<b>Voltage</b>	11v -24 VDC	<b>Color Finishing</b>	Black, White and Silver
<b>Led Wattage</b>	6W	<b>Working Temperature</b>	recommended 10°C to 25°C
<b>Wattage Once Used</b>	7.6W	<b>Storage Temperature (specify C or F)</b>	recommended 22°C
<b>Input Current</b>	650mA - 330mA	<b>Certificates</b>	CE
<b>Beam Angles</b>	Zoomable 8° to 55°	<b>Warranty</b>	5 years
<b>Pan / Tilt</b>	355° / 90°	<b>Class</b>	III
<b>Luminous Flux &amp; Lumens</b>	813lm @RA97 / 255lm	<b>Rating</b>	IP30
<b>Color Temperatures Available</b>	3000K/ 4000K/ 5000K	<b>Drivers Compatible CC/ CV</b>	CV
<b>Adapter</b>	Luxam Micro Track	<b>Lifespan</b>	50000H
<b>Dimmable Options</b>	External dimming with PWM 12V track driver	<b>Lens</b>	Glass
<b>CRI</b>	97 typ	<b>LED</b>	COB
<b>Weight</b>	144g	<b>Dimensions</b>	103*47*44 (mm)
<b>Main Material</b>	Aluminum	<b>Indoor Use</b>	only

**PHOTOMETRICS**

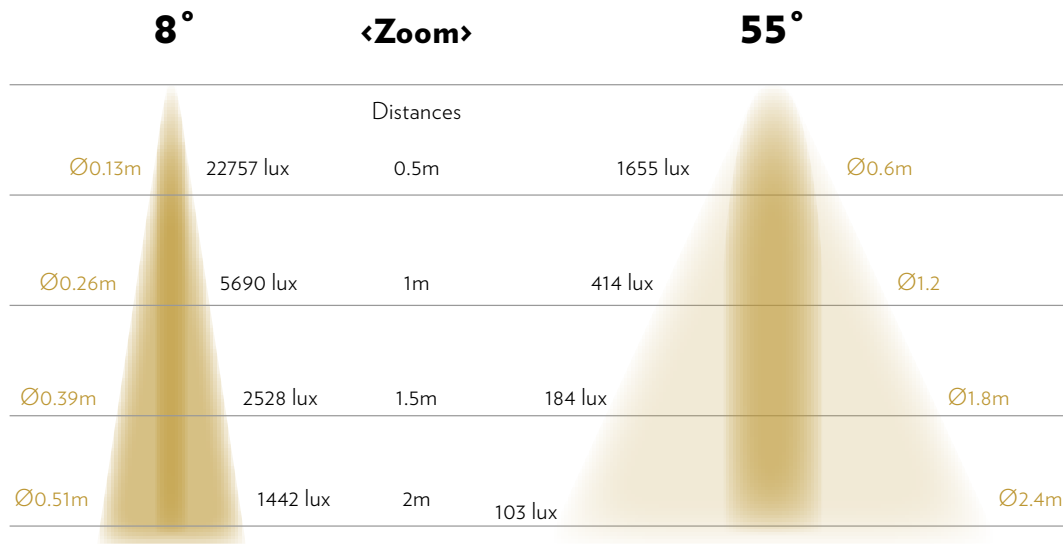

6W Spotlights can transform into Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights - with one body you can have either a spotlight or a framing shutter spotlight.

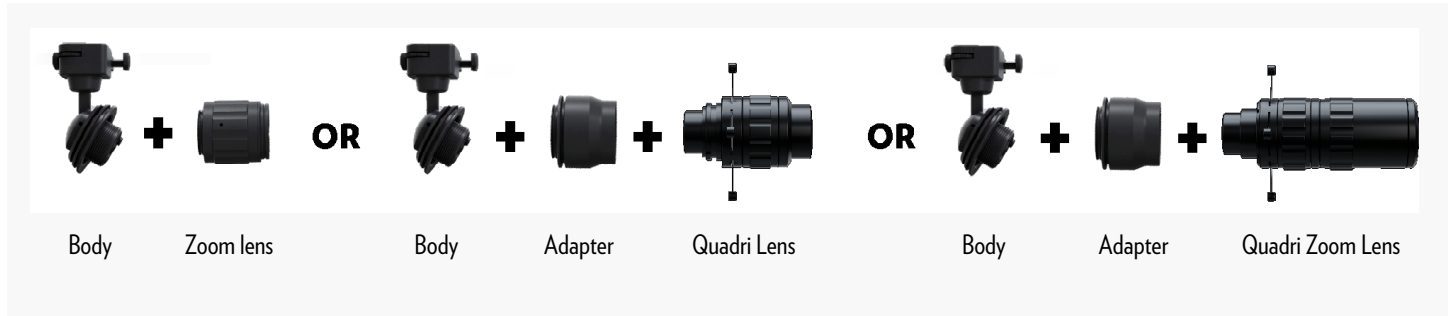

**DRIVERS COMPATIBLE**

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LPV-100-12	100W	80W	10 Fixtures	CV
LPV-60-12	60W	48W	6 Fixtures	CV
LPV-35-12	35W	28W	3 Fixtures	CV
NPF-90-12	90W	72W	9 Fixtures	CV & CC
NPF-40-12	40W	32W	4 Fixtures	CV & CC

**VARIATIONS**



Please check product cut sheets for details - driver indications vary per product.