




**L-MTWS-22**


Wall Washer 5W  
with Barndoor

**L-MTWS-32**

Wall Washer 10W  
with Barndoor

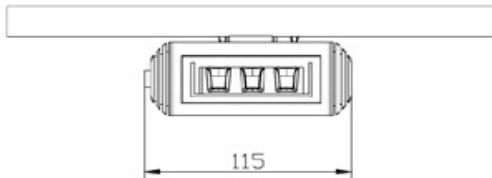

L-MTWS-22 5W

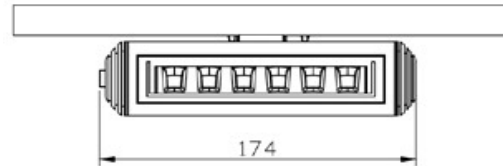

L-MTWS-32 10W

**FEATURES**


- Fully compatible with all MicroTrack systems
- These fixtures are designed to evenly highlight a wall from top to bottom, also used inside the showcases they light the back panels.
- Fully dimmable with onboard dimmer

**TECHNICAL DATA**


	<b>L-MTWS-22 (5W)</b>	<b>L-MTWS-32 (10W)</b>
<b>Voltage</b>	12 VDC	12 VDC
<b>Wattage Once Used</b>	5W	10.5W
<b>Input Current</b>	410mA	860mA
<b>Beam Angles</b>	Washer Effect	Washer Effect
<b>Tilt</b>	0-90°	0-90°
<b>Luminous Flux &amp; Lumens</b>	380lm	800lm
<b>Color Temperatures Available</b>	3000K/4000K/5000K	3000K/4000K/5000K
<b>Adapter</b>	Luxam Micro Track	Luxam Micro Track
<b>Dimmable Options</b>	On board Dimmer: PWM, range 0-100%	On board Dimmer: PWM, range 0-100%
<b>CRI</b>	97 typ	97 typ
<b>Main Material</b>	Aluminum	Aluminum
<b>Color Finishing</b>	Black, White and Silver	Black, White and Silver
<b>Working Temperature</b>	recommended 10°C to 25°C	recommended 10°C to 25°C
<b>Storage Temperature</b>	recommended 22°C	recommended 22°C
<b>Certificates / Standard</b>	UL, CE	UL, CE
<b>Warranty</b>	5 years	5 years
<b>Class</b>	ⓘ	ⓘ
<b>Protection Rating</b>	IP30	IP30
<b>Drivers Compatible CC/CV</b>	CV	CV
<b>Lifespan</b>	50000H	50000H
<b>Lens</b>	PMMA	PMMA
<b>LED</b>	SMD Ceramic	SMD Ceramic
<b>Dimensions</b>	122*67*45 (mm)	175*67*45 (mm)
<b>Indoor Use</b>	only	only
<b>Weight</b>	185g	265g



PHOTOMETRICS

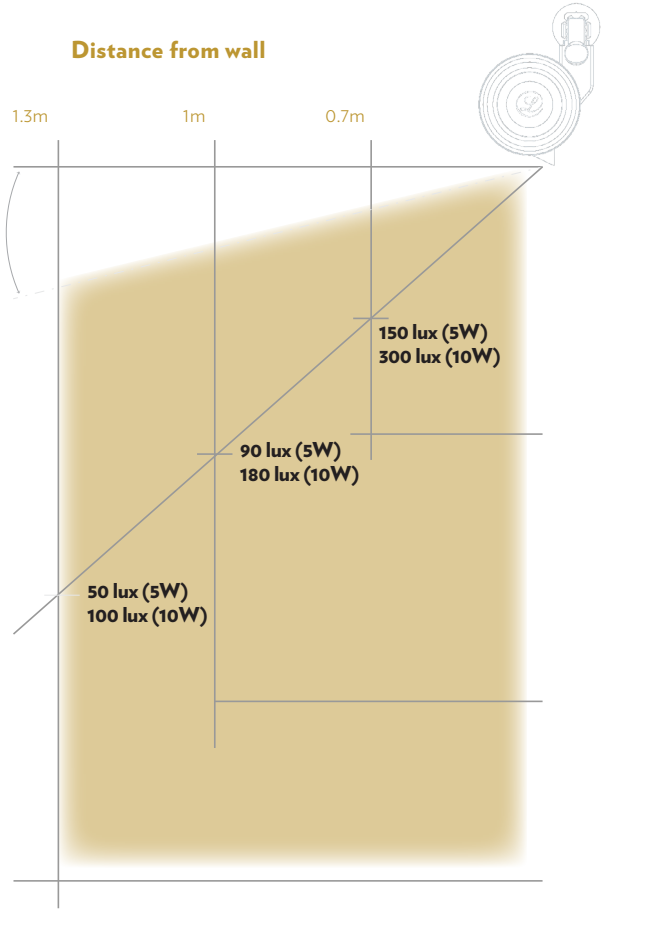

**For even lighting - distance apart = distance from wall**

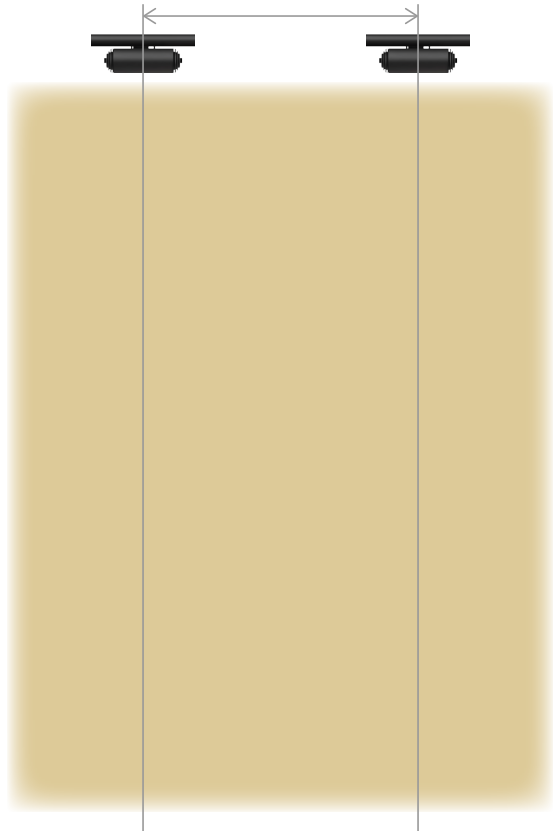



**DRIVERS COMPATIBLE**

**L-MTWS-22**

Driver	# Fixtures/Driver*	Current
LPV-100-12	16 Fixtures	CV
LPV-60-12	9 Fixtures	CV
LPV-35-12	5 Fixtures	CV
NPF-90-12	14 Fixtures	CV & CC
NPF-40-12	6 Fixtures	CV & CC

**L-MTWS-32**

Driver	# Fixtures/Driver*	Current
LPV-100-12	8 Fixtures	CV
LPV-60-12	4 Fixtures	CV
LPV-35-12	2 Fixtures	CV
NPF-90-12	7 Fixtures	CV & CC
NPF-40-12	3 Fixtures	CV & CC