


FEATURES

- Total weight: 420g
- FS weight: 215g
- Max size: 189*45*38 (mm)

TECHNICAL DATA

Voltage:	11v -24 VDC	Working Temperature	recommended 10°C to 25°C
Led Wattage:	6W	Storage Temperature (Specify C Or F)	recommended 22°C
Wattage Once Used:	7.8W	Certificates / Standard	CE
Input Current:	650mA - 330mA	Warranty	5 years
Beam Angles:	18° - 37°	Drivers Compatible Cc/ Cv	CV
Pan / Tilt:	355° / 90°	Lifespan	50000H
Color Temperatures Available:	3000K/ 4000K/ 5000K	Lens	Glass
Adapter:	Surface mount	LED	COB
Dimmable Options:	On board Dimmer: PWM, range 0-100%	Class	⬢
CRI	97 typ	Rating	IP30
Weight	420gr	Dimensions	189*45*38 (mm)
Main Material	Aluminum	Indoor use	only
Color Finishing	Black, White and Silver		

PHOTOMETRICS

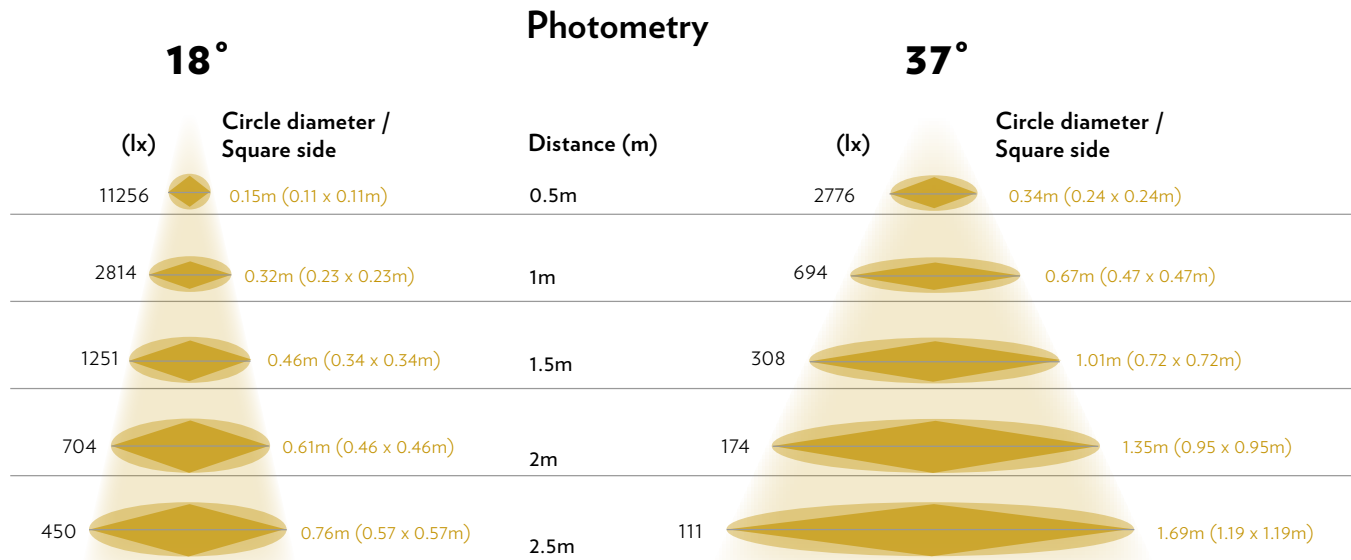


6W Spotlights can transform into Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights – with one body you can have either a spotlight or a framing shutter spotlight.



GOBO DETAILS

A gobo adds depth and texture to your setup. The L-MZFSA-22 6W Quadri Zoom Framing Shutter accepts 19.7mm outer diameter, 14.5mm inner diameter, 0.3mm-1mm thick glass or stainless steel gobos, including full color glass and plastic options.

LENS CODES: L-MTZQ-1536 and L-MTQD-55

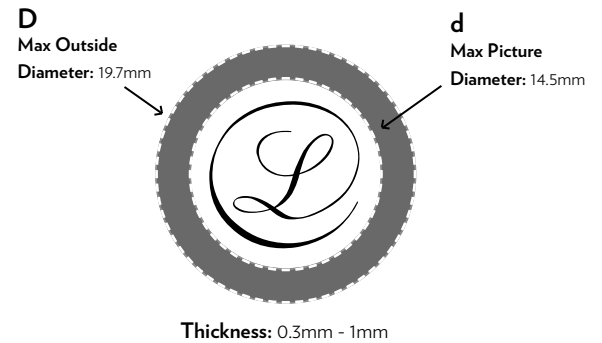

DRIVERS COMPATIBLE

Driver	# Fixtures/Driver*	Current
LPV-100-12	11 Fixtures	CV
LPV-60-12	7 Fixtures	CV
LPV-35-12	3 Fixtures	CV
NPF-90-12	10 Fixtures	CV & CC
NPF-40-12	4 Fixtures	CV & CC

SCREW SIZES Focus and Articulation: 1.5 mm
#6 flat head screws used to attach the magnetic base to the surface prior to attachment of fixture to base.

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.