

Technical Data



L-UPL-10-1
LED WATTAGE: 1W
WATTAGE ONCE USED: 1W
INPUT CURRENT: 300-350mA Constant Current (connect in series)
BEAM ANGLES: Zoomable 9 to 70°
PAN / TILT: 355° / 90°
LUMINOUS EFFICIENCY OF THE LED: 100lm/W @RA95 min
COLOR TEMPERATURES: 3000K, 4000K, 5000K
ADAPTER: Surface mount
DIMMABLE OPTIONS: Dimmable with PWM driver
CRI: 95 min
WEIGHT: 85g
MAIN MATERIAL: Aluminum
COLOR FINISHING: Black, White and Silver
STORAGE TEMPERATURE: recommended 22°C
CERTIFICATES / STANDARD: UL, CE
WARRANTY: 5 years
DRIVERS COMPATIBLE: Constant Current
LIFESPAN: 50 000 hours
LENS: Glass
LED: SMD CERAMIC
CLASS: III, Indoor use only
RATING: IP30
DIMENSIONS: 68*22*300 (mm)
LENGTH OF TAIL: 145cm

L-UPL-10-2
LED WATTAGE: 1W
WATTAGE ONCE USED: 2W
INPUT CURRENT: 300-350mA Constant Current (connect in series)
BEAM ANGLES: Zoomable 9 to 70°
PAN / TILT: 355° / 90°
LUMINOUS EFFICIENCY OF THE LED: 100lm/W @RA95 min
COLOR TEMPERATURES: 3000K, 4000K, 5000K
ADAPTER: Surface mount
DIMMABLE OPTIONS: Dimmable with PWM driver
CRI: 95 min
WEIGHT: 113g
MAIN MATERIAL: Aluminum
COLOR FINISHING: Black, White and Silver
STORAGE TEMPERATURE: recommended 22°C
CERTIFICATES / STANDARD: UL, CE
WARRANTY: 5 years
DRIVERS COMPATIBLE: Constant Current
LIFESPAN: 50 000 hours
LENS: Glass
LED: SMD CERAMIC
CLASS: III, Indoor use only
RATING: IP30
DIMENSIONS: 70*26*405 (mm)
LENGTH OF TAIL: 145cm

L-UPL-10-3
LED WATTAGE: 1W
WATTAGE ONCE USED: 3W
INPUT CURRENT: 300-350mA Constant Current (connect in series)
BEAM ANGLES: Zoomable 9 to 70°
PAN / TILT: 355° / 90°
LUMINOUS EFFICIENCY OF THE LED: 100lm/W @RA95 min
COLOR TEMPERATURES: 3000K, 4000K, 5000K
ADAPTER: Surface mount
DIMMABLE OPTIONS: Dimmable with PWM driver
CRI: 95 min
WEIGHT: 153g
MAIN MATERIAL: Aluminum
COLOR FINISHING: Black, White and Silver
STORAGE TEMPERATURE: recommended 22°C
CERTIFICATES / STANDARD: UL, CE
WARRANTY: 5 years
DRIVERS COMPATIBLE: Constant Current
LIFESPAN: 50 000 hours
LENS: Glass
LED: SMD CERAMIC
CLASS: III, Indoor use only
RATING: IP30
DIMENSIONS: 70*26*405 (mm)
LENGTH OF TAIL: 145cm

L-UPL-10-4
LED WATTAGE: 1W
WATTAGE ONCE USED: 4W
INPUT CURRENT: 300-350mA Constant Current (connect in series)
BEAM ANGLES: Zoomable 9 to 70°
PAN / TILT: 355° / 90°
LUMINOUS EFFICIENCY OF THE LED: 100lm/W @RA95 min
COLOR TEMPERATURES: 3000K, 4000K, 5000K
ADAPTER: Surface mount
DIMMABLE OPTIONS: Dimmable with PWM driver
CRI: 95 min
WEIGHT: 179g
MAIN MATERIAL: Aluminum
COLOR FINISHING: Black, White and Silver
STORAGE TEMPERATURE: recommended 22°C
CERTIFICATES / STANDARD: UL, CE
WARRANTY: 5 years
DRIVERS COMPATIBLE: Constant Voltage
LIFESPAN: 50 000 hours
LENS: Glass
LED: SMD CERAMIC
CLASS: III, Indoor use only
RATING: IP30
DIMENSIONS: 70*26*405 (mm)
LENGTH OF TAIL: 145cm

Safety Instructions

IMPORTANT SAFETY INSTRUCTIONS

To ensure the safe installation and operation of the Luxam lighting system, follow these guidelines carefully. Failure to comply with these instructions may result in fire, electric shock, damage to the system, or voiding of the warranty.

General Safety Guidelines

1. Power Supply:
 - Disconnect the power supply before starting any installation or maintenance work. Ensure it cannot be reconnected inadvertently during the process.
 - Turn off electrical power before modifying the lighting system.
2. Installation Environment:
 - Do not install the system in wet locations.
 - Do not conceal or extend exposed conductors through a building wall.
3. Ventilation and Mounting:
 - Maintain proper ventilation around the luminaire. Do not place objects on top of it.
 - Keep a clearance of 10-15 cm between the luminaire and adjacent heat sources.
 - Use the standard mounting orientation. Non-standard orientations or high ambient temperatures may increase internal temperatures and require a reduction in output current. Refer to the specification sheet for the optimal mounting position and de-rating curve details.
4. Fire and Overheating Prevention:
 - Ensure all connections are tight to reduce the risk of fire, burns, or overheating.
 - Do not install the lighting system where exposed bare conductors can be shorted or come into contact with conductive materials.
 - Keep all luminaires at least 6 inches (152 mm) away from curtains or other combustible materials.


Fixtures-Specific Instructions

1. Manual Review: Thoroughly review the manual provided before installation. Failure to follow these instructions will void your warranty.
2. Warranty Conditions:
 - Do not attempt to repair or alter the system. This will void the warranty.
 - Always install the products in compliance with local, state, and national codes.
3. Showcase Installation: When installing in showcases, consider the internal temperature of the showcase rather than the ambient temperature. Ensure that minimum air volume, circulation, and conditioning requirements are met.

SAVE THESE INSTRUCTIONS


For more details about installation specifications, safe handling, or operation requirements, please refer to the manufacturer's documentation or contact the support team.

Basic Luminaire Manipulations

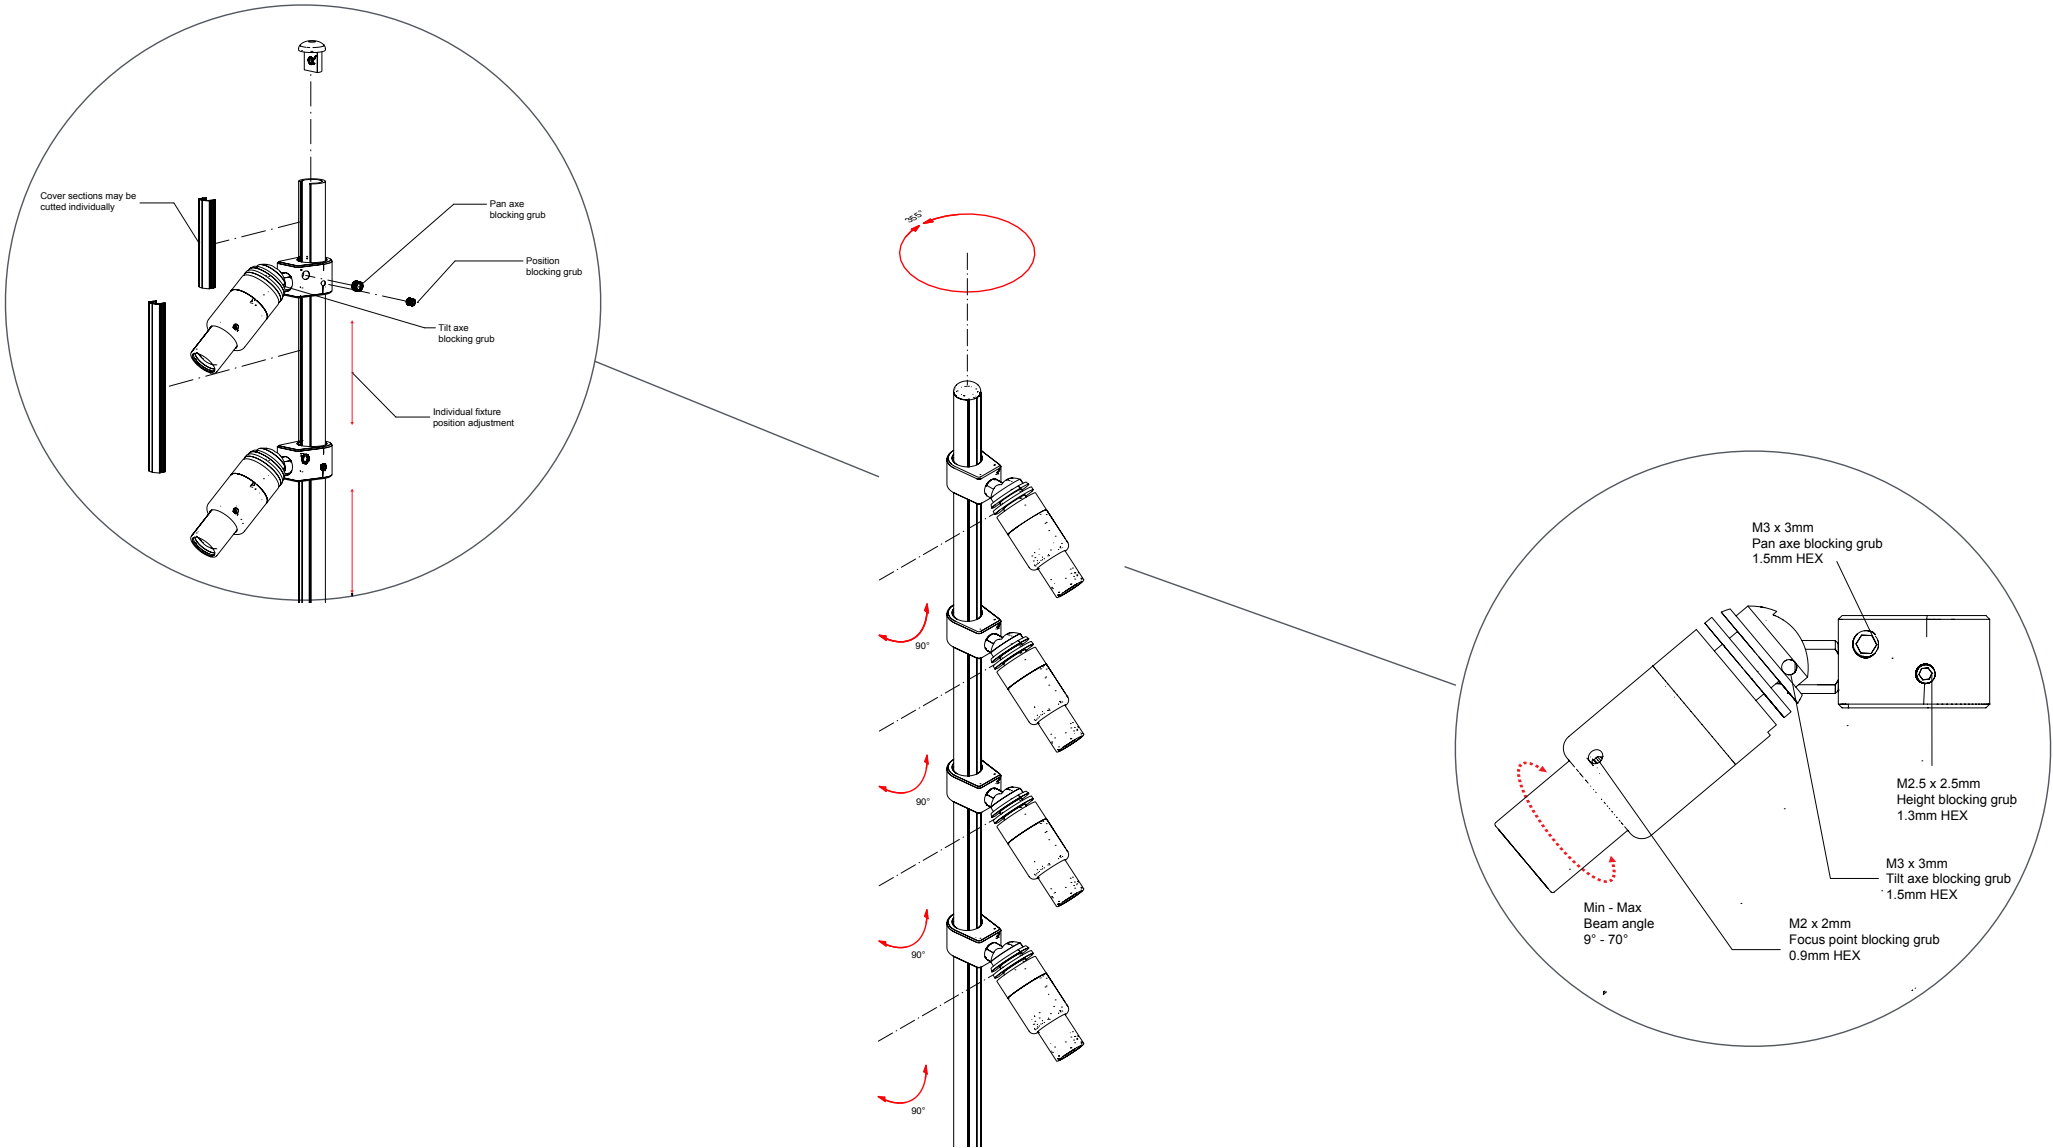


Axes Control Details

L-UPL-10-1

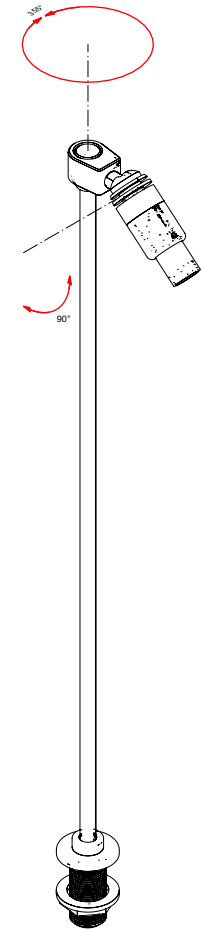


L-UPL-10-4

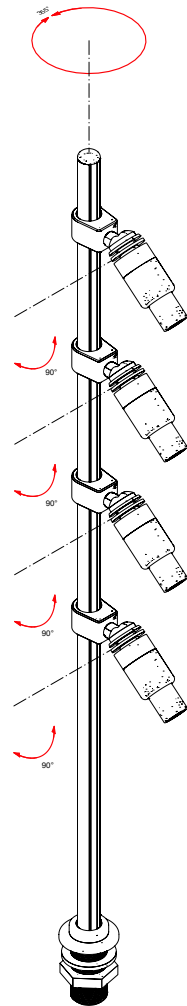


Product Dimensions


L-UPL-10-1

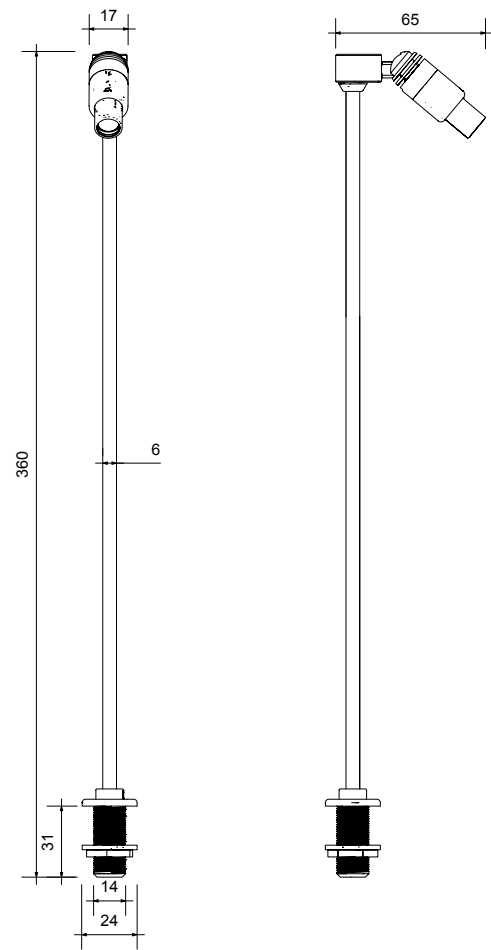

L-UPL-10-4

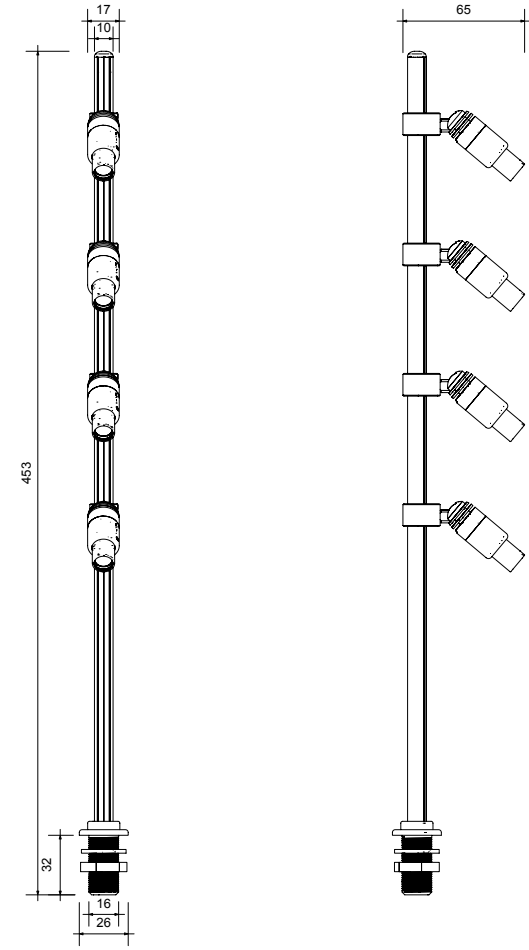


Installation

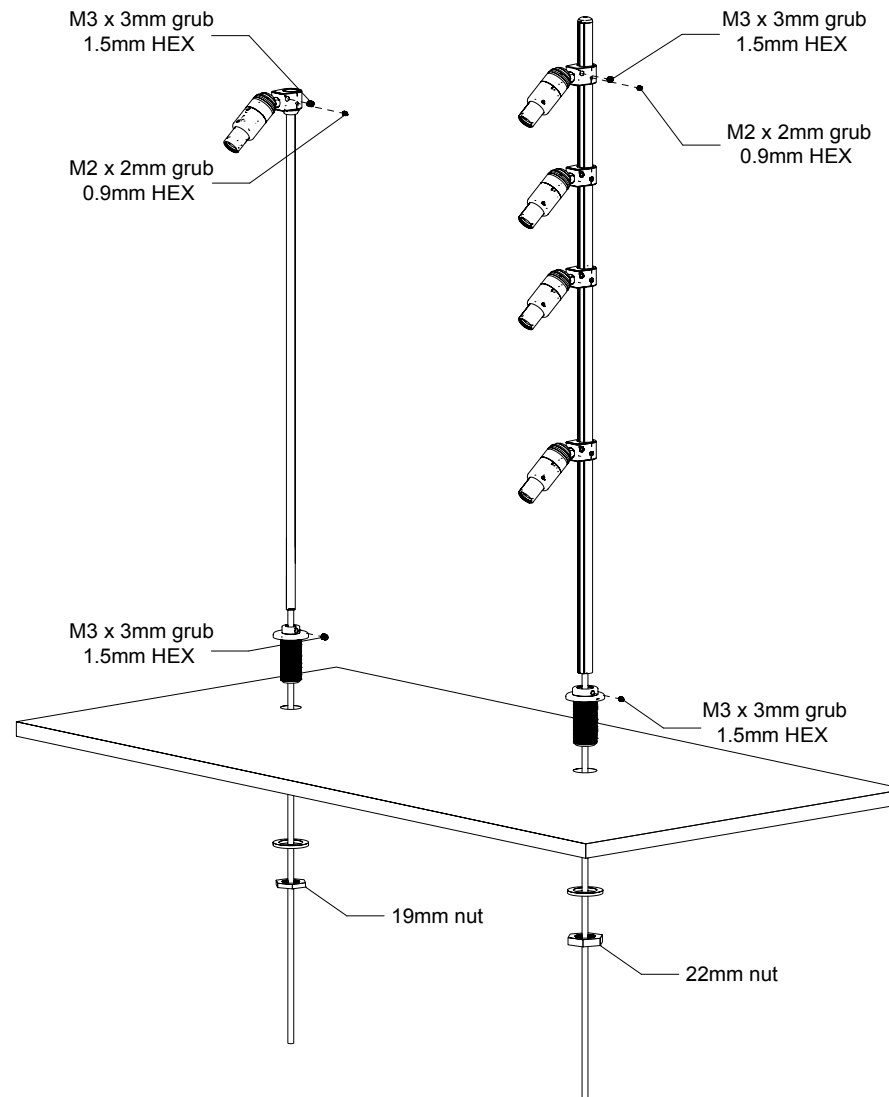


Mount Installation

1. Drill the hole.
2. Insert the base into the drilled hole.
3. Secure the base underneath using a washer and nut.
4. Pass the cable(s) through the base.
5. Insert the stem into the base.
6. Adjust rotation and height, then secure with the grub screw.

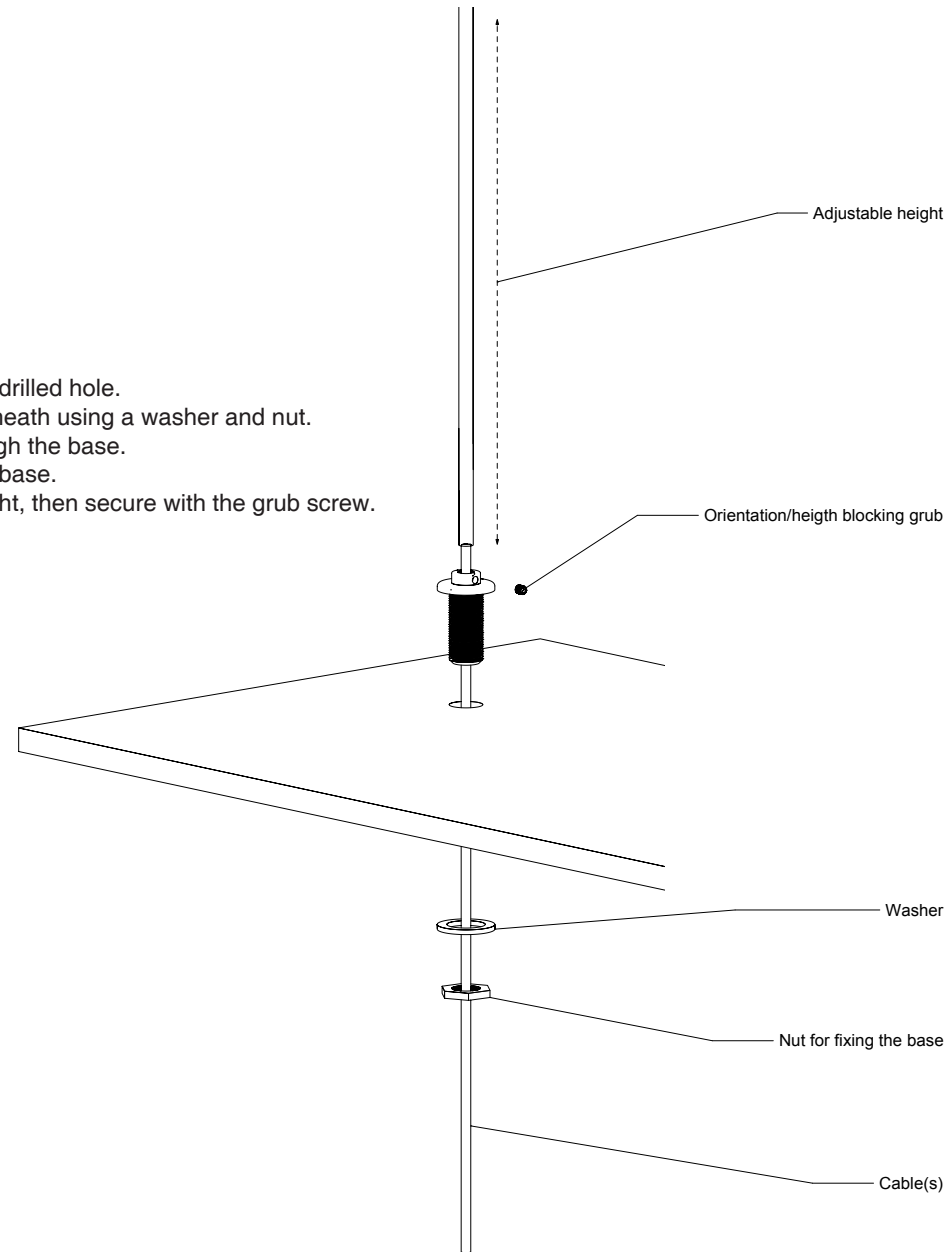

Driver Wiring Schema for L-UPL-10-1

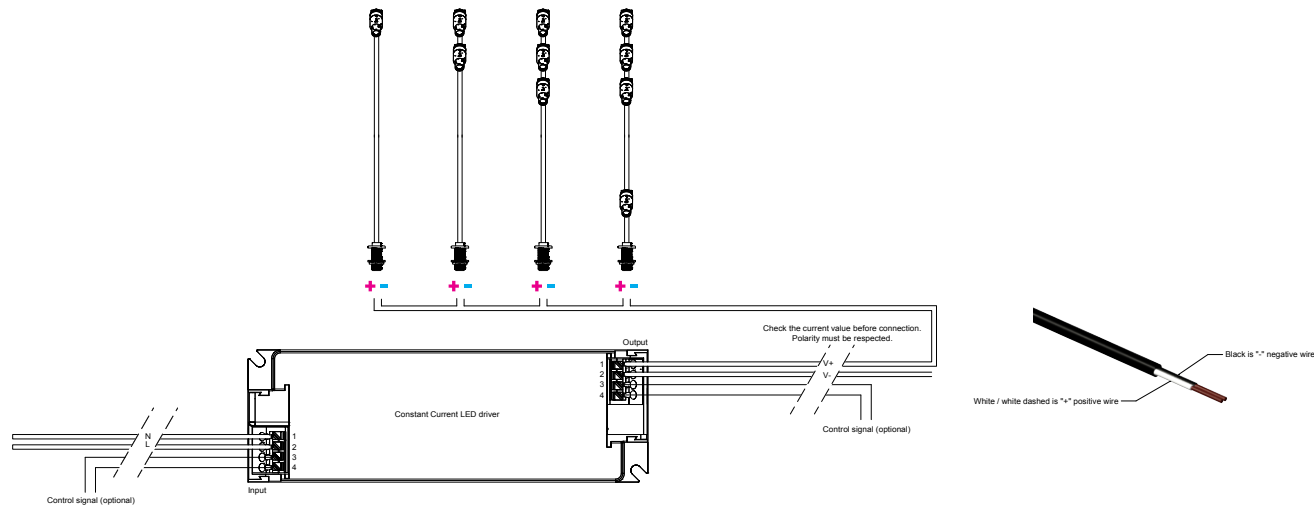

Driver	Short Description	Nbr of Fixtures**	Settings
DMX-25-150-900-U1P1	Constant Current driver with DMX control, 25W, 1 channel	3 - 15	300-350mA
AD-36-200-1200-U1P1	Constant Current driver with DMX control, 36W, 1 channel	3 - 15	300-350mA
SE-10-350-700-W1A	Constant Current driver with 0-10V control, 10W, 1 channel	1 - 3	300-350mA
SE-12-350-700-W1A	Constant Current driver with 0-10V control, 12W, 1 channel	3 - 7	300-350mA
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	3 - 12	300-350mA
SE-30-200-800-W1A	Constant Current driver with 0-10V control, 30W, 1 channel	3 - 12	300-350mA
SE-40-300-1050-W1A	Constant Current driver with 0-10V control, 40W, 1 channel	3 - 12	300-350mA
L-CT-DMX/RDM-1-3W-6CH	Constant Current driver with manual/DMX control, 6W x 6 channels*	1 - 6	300-350mA

*To use with L-UPL-10... luminaires only
**If wiring multiple stems together, ensure you account for all 1W heads per driver to determine the minimum and maximum number of fixtures.
L-UPL-10-1 = 1W head
L-UPL-10-2 = 2 x 1W heads
L-UPL-10-3 = 3 x 1W head
L-UPL-10-4 = 4 x 1W heads

IMPORTANT: Always use with UL power unit, with isolated output, 10A maximum.