






L-MTSA-12
1W STANDALONE HEAD

PRODUCT CUTSHEET



SCAN
FOR WEBSITE

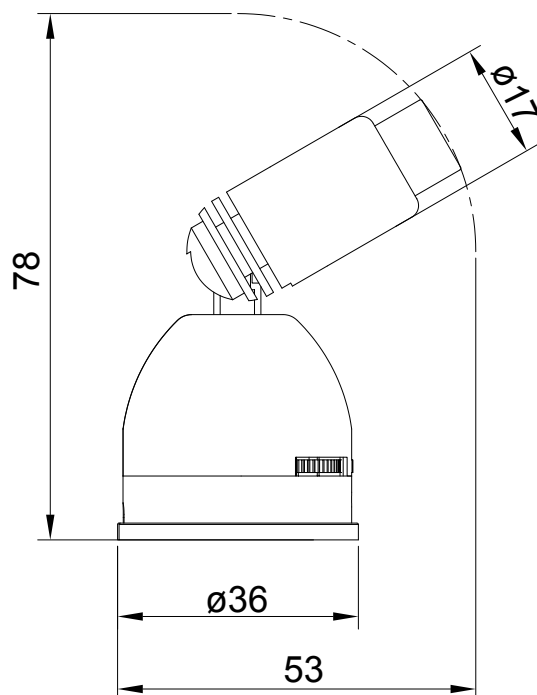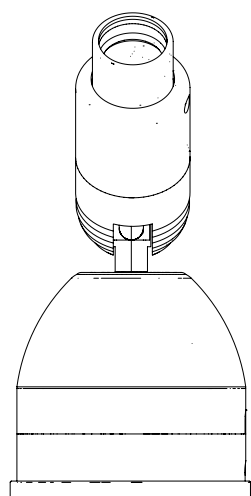

FEATURES

- Our micro track head in a stand-alone configuration dual base magnetic and screw in base.
- Accepts all accessories for 1W
- Fully focusable 9° to 70°

6W ACCESSORIES



L-MTAS-10
ANGLED SNOOT



L-MTBD-10
BARNDOR



L-MTFH-10
FILTER HOLDER




L-MTBR-10
BEAM REDUCER



TECHNICAL DATA


Voltage	12 VDC	Color Finishing	Black, White and Silver
LED Wattage	1W	Storage Temperature	recommended 22°C
Wattage Once Used	1.2W	Certificates / Standard	UL, CE
Input Current	110mA	Warranty	5 years
Beam Angles	Zoomable 9 to 70°	Drivers Compatible	Constant Voltage
Pan / Tilt	355° / 90°	Lifespan	50 000 hours
Luminous Efficiency of the LED	100lm/W @RA95 min	Lens	Glass
Color Temperatures	3000K, 4000K, 5000K	LED	SMD CERAMIC
Adapter	Surface mount	Class	III, Indoor use only
Dimmable Options	On board Dimmer: PWM, range 0-100%	Rating	IP30
CRI	95 min	Dimensions	53*36*78 (mm)
Weight	96g	Length of Tail	145cm
Main Material	Aluminum		

PHOTOMETRICS

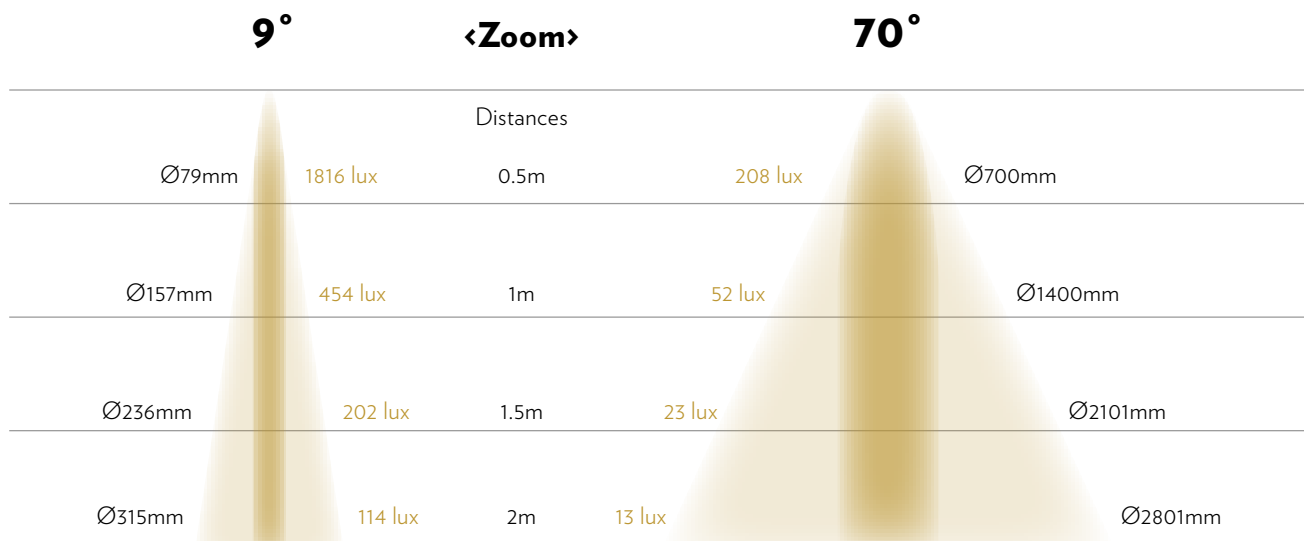




6W Spotlights can transform into Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights - with one body you can have either a spotlight or a framing shutter spotlight.

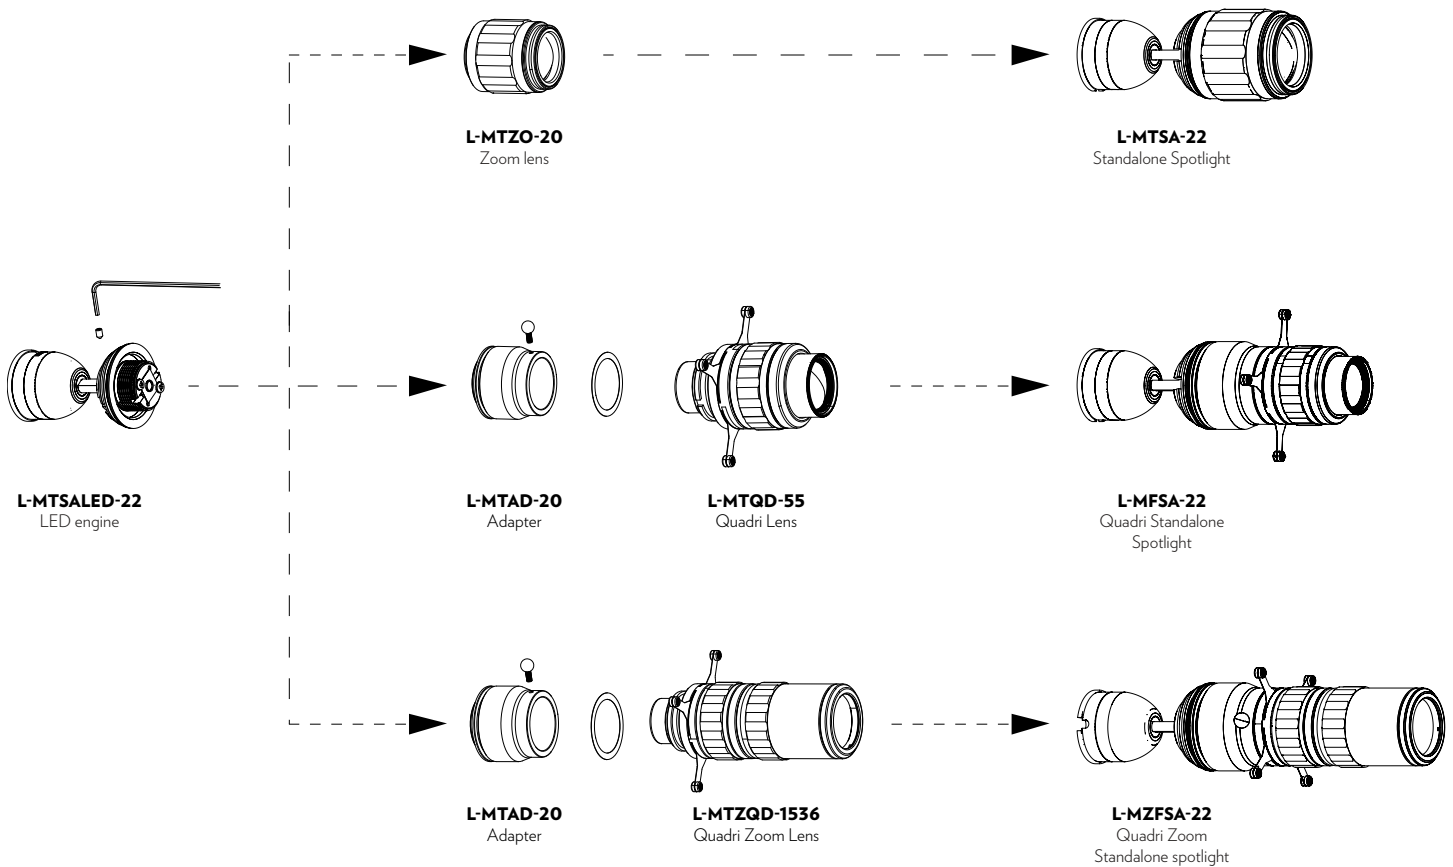

DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
SE-10-350-700-W1A	Constant Current driver with 0-10V control, 10W, 1 channel	1/4	110mA (2-12V)
SE-12-350-700-W1A	Constant Current driver with 0-10V control, 12W, 1 channel	4/8	110mA (10-24V)
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	3/14	110mA (9-42V)
SE-30-200-800-W1A	Constant Current driver with 0-10V control, 30W, 1 channel	3/14	110mA (9-42V)
AD-36-200-1200-U1P1	Constant Current driver with DMX control, 36W, 1 channel	4/18	110mA (10-54V)
SE-40-300-1050-W1A	Constant Current driver with 0-10V control, 40W, 1 channel	3/14	110mA (9-42V)
DMX-25-150-900-U1P1	Constant Current driver with DMX control, 25W, 1 channel	4/18	110mA (10-54V)
L-CT-DMX-RDM-1-3W-6CH	Constant Current driver with DMX control, 25W, 1 channel	1/6	110mA (3-21V)
OT 12W UNV 0A3 DUALDIM DIM-1 F (eldoled 2W)	Constant Current driver with 0-10V control, 12W, 1 channel	1/9	110mA (2-42V)

VARIATIONS

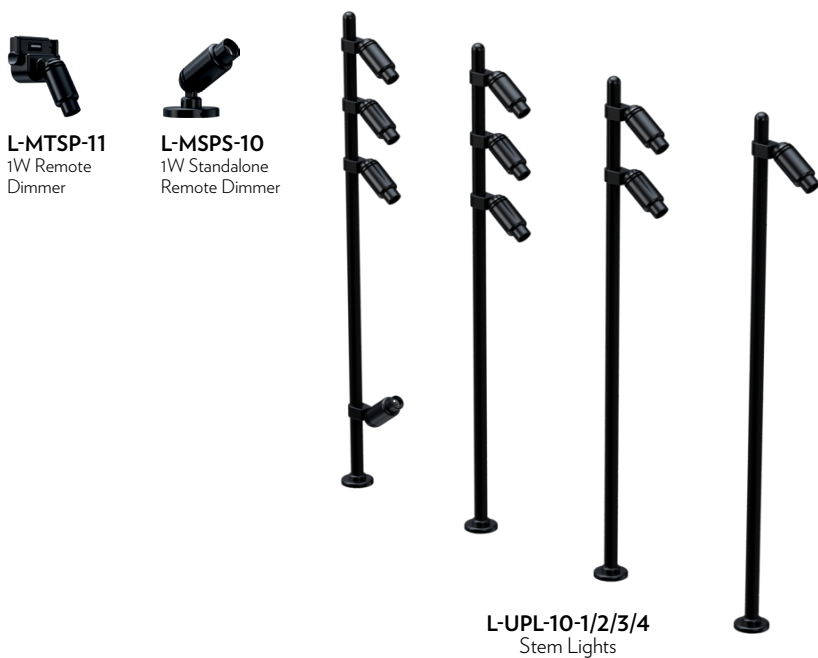

Please check product cut sheets for details - driver indications vary per product.