




L-MZFSA-22
6W STANDALONE QUADRI ZOOM
FRAMING SHUTTER


PRODUCT CUTSHEET



SCAN
FOR WEBSITE

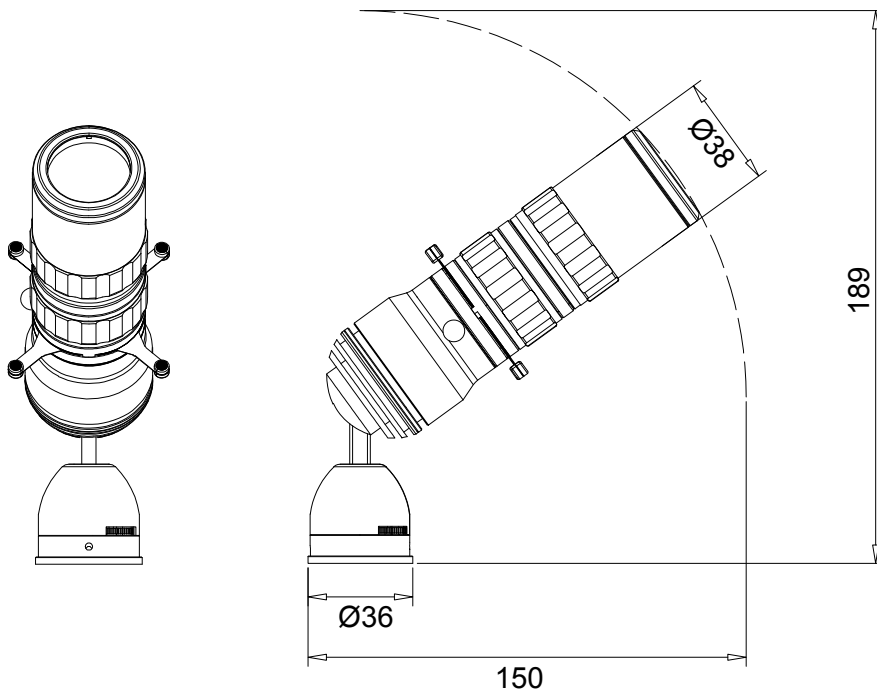

L-MSZFS-20



L-MTFHZQ-20



FEATURES

- Zoom 15-36° standalone framing shutter lens
- Accessories including L-MTFHZQ-20 Filter 6W Holder Zoom Quadri, Gobo
 - ø37mm - filter size

AVAILABLE ACCESSORIES



L-MTFHZQ-20
FILTER HOLDER

TECHNICAL DATA

Voltage	11-24 VDC	Color Finishing	Black, White and Silver
LED Wattage	6W	Storage Temperature	recommended 22°C
Wattage Once Used	7.8W	Certificates / Standard	UL, CE
Input Current	700-330mA	Warranty	5 years
Beam Angles	15-36°	Drivers Compatible	Constant Voltage
Pan / Tilt	355° / 90°	Lifespan	50 000 hours
Luminous Efficiency of the LED	100lm/W @RA97 min	Lens	Glass
Color Temperatures	3000K, 4000K, 5000K	LED	SMD CERAMIC
Adapter	Luxam Micro Track	Class	III, Indoor use only
Dimmable Options	Surface mount	Rating	IP30
CRI	97 min	Dimensions	122*43*161 (mm)
Weight	417g	Length of Tail	145cm
Main Material	Aluminum		



LUXAM

LIGHTING FOR MUSEUMS

PRODUCT CUTSHEET

L-MZFSA-22

6W STANDALONE QUADRI ZOOM FRAMING SHUTTER

PHOTOMETRICS

15°			36°		
(lx)	Circle diameter / Square side	Distance (m)	(lx)	Circle diameter / Square side	
11256	 0.15m (0.11 x 0.11m)	0.5m	2776	 0.34m (0.24 x 0.24m)	
2814	 0.32m (0.23 x 0.23m)	1m	694	 0.67m (0.47 x 0.47m)	
1251	 0.46m (0.34 x 0.34m)	1.5m	308	 1.01m (0.72 x 0.72m)	
704	 0.61m (0.46 x 0.46m)	2m	174	 1.35m (0.95 x 0.95m)	
450	 0.76m (0.57 x 0.57m)	2.5m	111	 1.69m (1.19 x 1.19m)	



luxam.com

LUXAM USA

12201 NW 35 Ste #534
Coral Springs, FL 33065
954 755 72 54 | info@luxam.com

LUXAM EUROPE

80 rue du Dessous des Berges
75013 Paris
+33982272946 | france@luxam.com

LUXAM GERMANY


Metzgerfeldweg 21
85737 Ismaning
+498951999651 | germany@luxam.com

LUXAM UK

184 Park Avenue
London NW10 7XL
info@luxam.com


PAGE 4 OF 6
REVISED ON JULY 2025

6W Spotlights can transform into Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights - with one body you can have either a spotlight or a framing shutter spotlight.

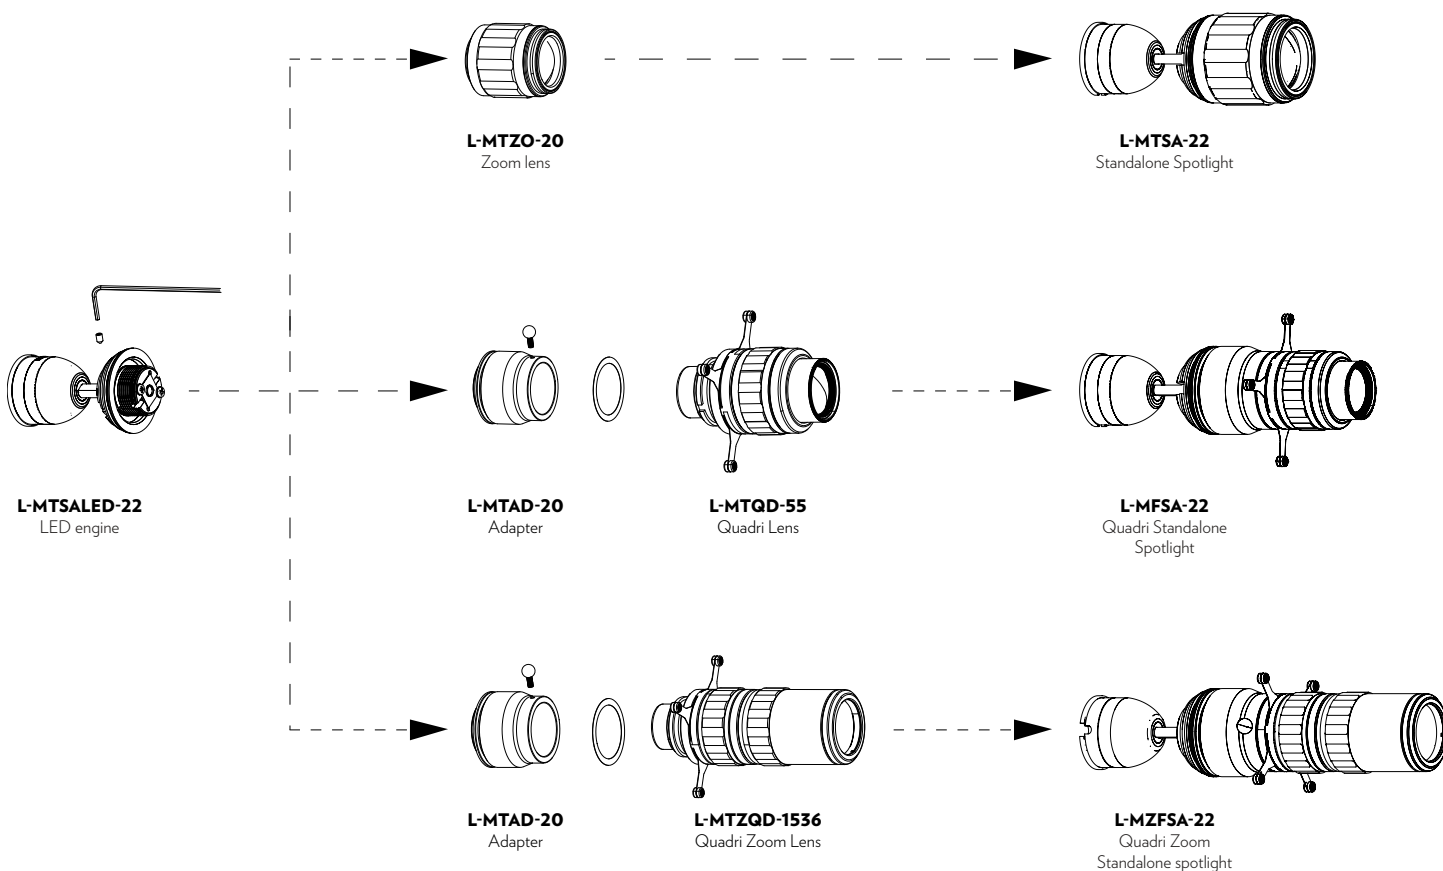

GOBO DETAILS

A gobo adds depth and texture to your setup. The L-MSZFS-20 6W Quadri Zoom Framing Shutter accepts 19.7mm outer diameter, 14.5mm inner diameter, 0.3mm-1mm thick glass or stainless steel gobos, including full color glass and plastic options.

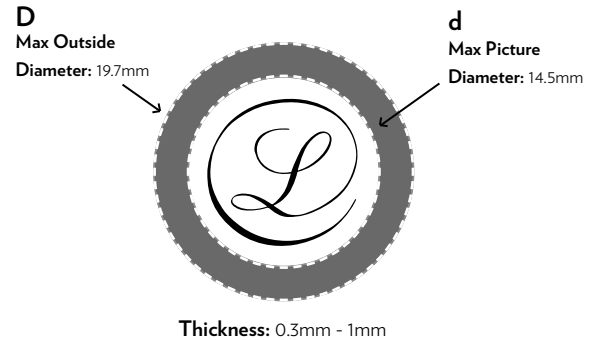

LENS CODES: L-MTZQ-1536 and L-MTQD-55

DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	1	165mA (9-42V)
OT 12W UNV 0A3 DUALDIM DIM-1 F	Constant Current driver with 0-10V control, 12W, 1 channel	1	165mA (26-42V)
DMX-25-150-900-U1P1	Constant Current driver with manual/DMX control, 25W x 6 channels*	1	150mA (10-54V)
L-CT-DMX/RDW-6W-6CH	Constant Current driver with manual/DMX control, 6W x 6 channels*	1 per channel	165mA (35.5V)

*To use with 6W L-MS...-20 spotlights only

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.