





L-UPL-10-2/3/4
STANDALONE STEM

PRODUCT CUTSHEET

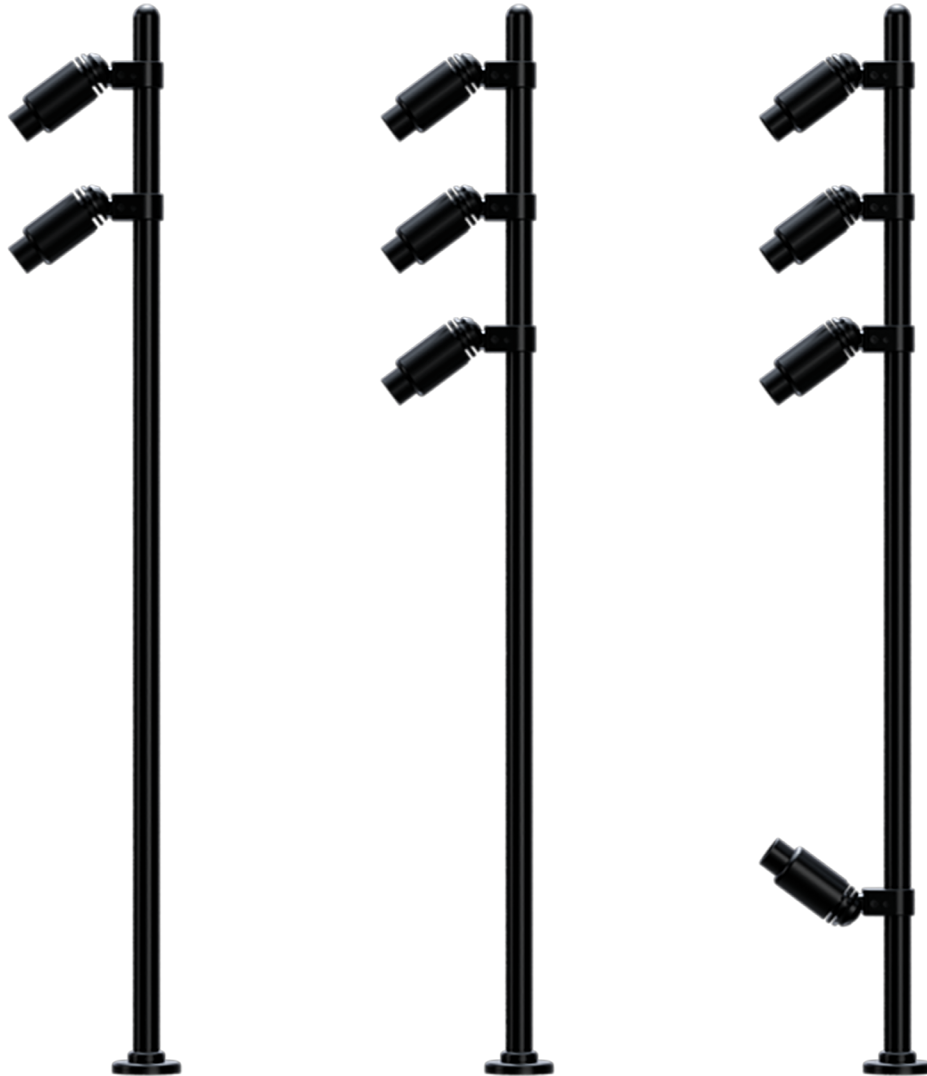

SCAN
FOR WEBSITE

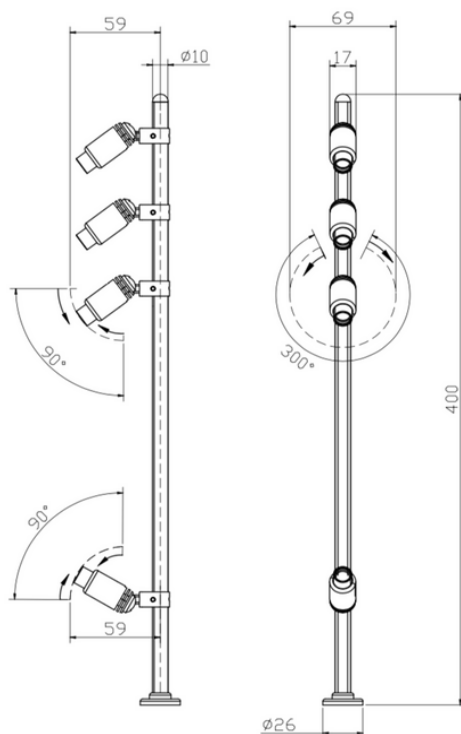

FEATURES

- Choose between 2, 3, or 4 heads - standard and custom heights available
- Full range of accessories – Barndoors, Snoots, Filter frame, etc.
- Fixed on a 10mm bar
- Each head is individually focusable 9° to 70°
- These fixtures need to be wired together in series.

1W ACCESSORIES



L-MTAS-10
ANGLED
SNOOT



L-MTBD-10
BARNDOOR



L-MTFH-10
FILTER
HOLDER



L-MTBR-10
BEAM
REDUCER




TECHNICAL DATA

	L-UPL-10-2	L-UPL-10-3	L-UPL-10-4
Voltage	Not to mentioned	Not to mentioned	Not to mentioned
LED Wattage	1W	1W	1W
Wattage Once Used	2W	3W	4W
Input Current	300-350ma constant current (connect in series)	300-350ma constant current (connect in series)	300-350ma constant current (connect in series)
Beam Angles	Zoomable 9 to 70°	Zoomable 9 to 70°	Zoomable 9 to 70°
Pan / Tilt	355° / 90°	355° / 90°	355° / 90°
Luminous Efficiency of the LED	100lm/w @ra95 min	100lm/w @ra95 min	100lm/w @ra95 min
Color Temperatures	3000k, 4000k, 5000k	3000k, 4000k, 5000k	3000k, 4000k, 5000k
Adapter	Surface mount	Surface mount	Surface mount
Dimmable Options	Dimmable with PWM Driver	Dimmable with PWM Driver	Dimmable with PWM Driver
CRI	95 min	95 min	95 min
Weight	113g	153g	179g
Main Material	Aluminum	Aluminum	Aluminum
Color Finishing	Black, White and Silver	Black, White and Silver	Black, White and Silver
Storage Temperature	Recommended 22°c	Recommended 22°c	Recommended 22°c
Certificates / Standard	UL, CE	UL, CE	UL, CE
Warranty	5 Years	5 Years	5 Years
Drivers Compatible	Constant Current	Constant Current	Constant Voltage
Lifespan	50 000 Hours	50 000 Hours	50 000 Hours
Lens	Glass	Glass	Glass
LED	SMD CERAMIC	SMD CERAMIC	SMD CERAMIC
Class	III, indoor use only	III, indoor use only	III, indoor use only
Rating	IP30	IP30	IP30
Dimensions	70*26*405 (mm)	70*26*405 (mm)	70*26*405 (mm)
Lenght of Tail	145cm	145cm	145cm

These fixtures need to be wired together in series.

PHOTOMETRICS

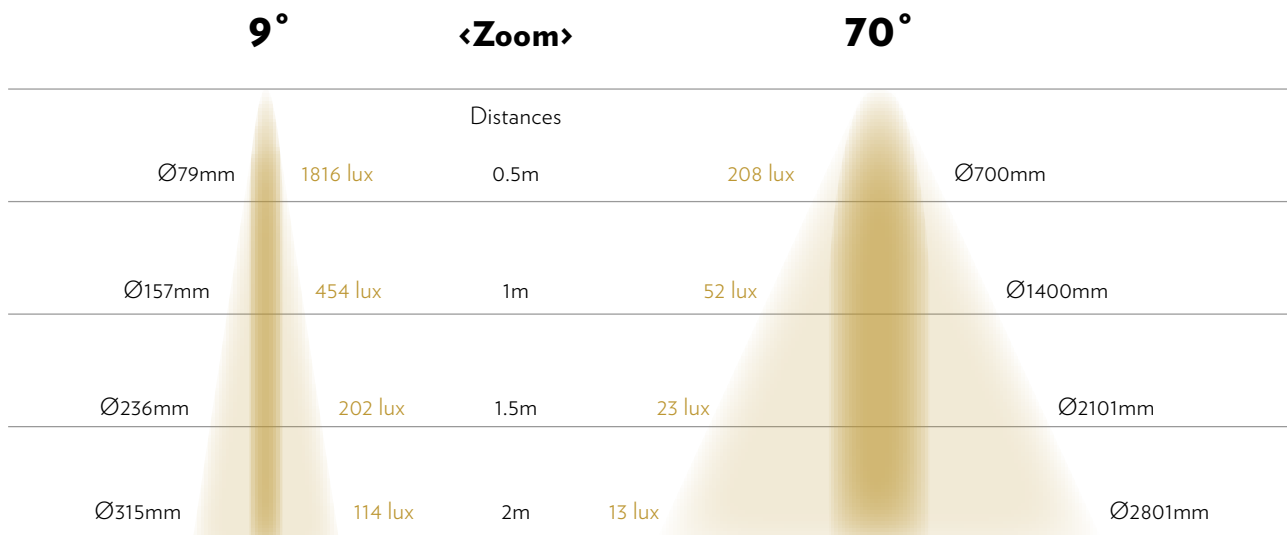

DRIVERS COMPATIBLE

L-UPL-10-2

Driver	Short Description	Nbr of Fixtures	Setting
SE-10-350-700-W1A	Constant Current driver with 0-10V control, 10W, 1 channel	1 - 2	350mA (2-12V)
SE-12-350-700-W1A	Constant Current driver with 0-10V control, 12W, 1 channel	2 - 4	350mA (10-24V)
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	2 - 7	350mA (9-42V)
SE-30-200-800-W1A	Constant Current driver with 0-10V control, 30W, 1 channel	2 - 7	350mA (9-42V)
AD-36-200-1200-U1P1	Constant Current driver with DMX control, 36W, 1 channel	2 - 9	350mA (10-54V)
SE-40-300-1050-W1A	Constant Current driver with 0-10V control, 40W, 1 channel	2 - 7	350mA (9-42V)
DMX-25-150-900-U1P1	Constant Current driver with DMX control, 25W, 1 channel	2 - 9	350mA (10-54V)
L-CT-DMX-RDM-1-3W-6CH	Constant Current driver with DMX control, 25W, 1 channel	1 - 3	350mA (3-21V)
SOLOdrive 12W/S SL12S-M1Z1A1 (eldoled 12W 0-10V)	Constant Current driver with 0-10V control, 12W, 1 channel	1 - 4	350mA (2-42V)

L-UPL-10-3

Driver	Short Description	Nbr of Fixtures	Setting
SE-10-350-700-W1A	Constant Current driver with 0-10V control, 10W, 1 channel	1 - 1	350mA (2-12V)
SE-12-350-700-W1A	Constant Current driver with 0-10V control, 12W, 1 channel	2 - 2	350mA (10-24V)
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	1 - 4	350mA (9-42V)
SE-30-200-800-W1A	Constant Current driver with 0-10V control, 30W, 1 channel	1 - 4	350mA (9-42V)
AD-36-200-1200-U1P1	Constant Current driver with DMX control, 36W, 1 channel	2 - 6	350mA (10-54V)
SE-40-300-1050-W1A	Constant Current driver with 0-10V control, 40W, 1 channel	1 - 4	350mA (9-42V)
DMX-25-150-900-U1P1	Constant Current driver with DMX control, 25W, 1 channel	2 - 6	350mA (10-54V)
L-CT-DMX-RDM-1-3W-6CH	Constant Current driver with DMX control, 25W, 1 channel	1 - 2	350mA (3-21V)
SOLOdrive 12W/S SL12S-M1Z1A1 (el-doled 12W 0-10V)	Constant Current driver with 0-10V control, 12W, 1 channel	1 - 3	350mA (2-42V)

SCREW SIZES Focus and Articulation: 0.9mm

L-UPL-10-4

Driver	Short Description	Nbr of Fixtures	Setting
SE-10-350-700-W1A	Constant Current driver with 0-10V control, 10W, 1 channel	1 - 1	350mA (2-12V)
SE-12-350-700-W1A	Constant Current driver with 0-10V control, 12W, 1 channel	1 - 2	350mA (10-24V)
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	1 - 3	350mA (9-42V)
SE-30-200-800-W1A	Constant Current driver with 0-10V control, 30W, 1 channel	1 - 3	350mA (9-42V)
AD-36-200-1200-U1P1	Constant Current driver with DMX control, 36W, 1 channel	1 - 4	350mA (10-54V)
SE-40-300-1050-W1A	Constant Current driver with 0-10V control, 40W, 1 channel	1 - 3	350mA (9-42V)
DMX-25-150-900-U1P1	Constant Current driver with DMX control, 25W, 1 channel	1 - 4	350mA (10-54V)
L-CT-DMX-RDM-1-3W-6CH	Constant Current driver with DMX control, 25W, 1 channel	1 - 1	350mA (3-21V)
SOLOdrive 12W/S SL12S-M1Z1A1 (el-doled 12W 0-10V)	Constant Current driver with 0-10V control, 12W, 1 channel	1 - 2	350mA (2-42V)

SCREW SIZES Focus and Articulation: 0.9mm



VARIATIONS



L-MTSP-11
1W Remote
Dimmer



L-MTSA-12
1W Standalone
Onboard
Dimmer



L-MTSP-12
1W Spotlight



L-MSPS-10
1W Standalone
Remote
Dimmer

Please check product cut sheets for details - driver indications vary per product.

