



L-UPL-30-1


STANDALONE STEM



LUXAM

LIGHTING FOR MUSEUMS

PRODUCT CUTSHEET L-UPL-30-1 | STANDALONE STEM

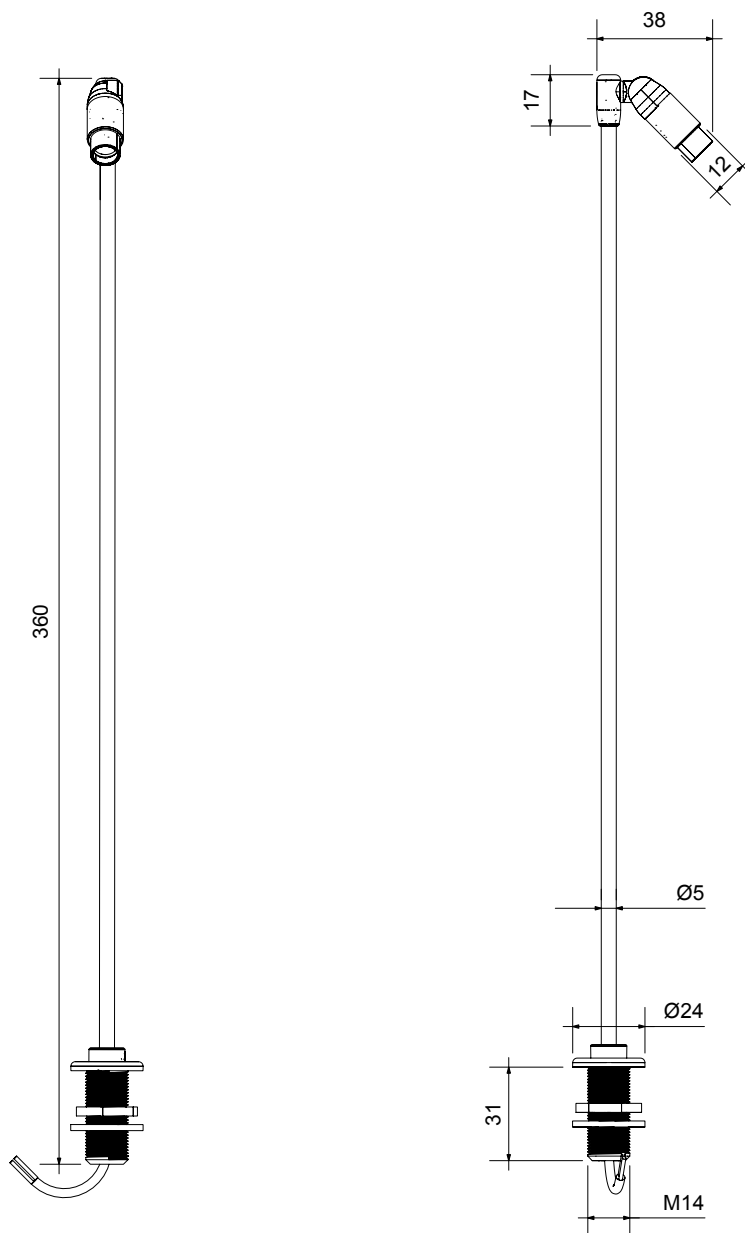

FEATURES

- Stem 1 has a single stationary spot light
- Stem 1 comes with a 5mm rod with adjustable height.
- Focusable from 7° to 70°
- These fixtures need to be wired together in series.



luxam.com

LUXAM USA
12201 NW 35 Ste #534
Coral Springs, FL 33065
954 755 72 54 | info@luxam.com

LUXAM EUROPE
80 rue du Dessous des Berges
75013 Paris
+33982272946 | france@luxam.com

LUXAM GERMANY
Metzgerfeldweg 21
85737 Ismaning
+498951999651 | germany@luxam.com

LUXAM UK
184 Park Avenue
London NW10 7XL
info@luxam.com

PAGE 2 OF 4
REVISED ON JULY 2025

TECHNICAL DATA

LED Wattage	0.7W	Color Finishing	Black, White and Silver
Wattage Once Used	0.7W	Storage Temperature	recommended 22°C
Input Current	250mA Constant Current (connect in series)	Certificates / Standard	UL, CE
Beam Angles	Zoomable 7 to 70°	Warranty	5 years
Pan / Tilt	355° / 90°	Drivers Compatible	Constant Current
Luminous Efficiency of the LED	100lm/W @RA95 min	Lifespan	50 000 hours
Color Temperatures	3000K, 4000K, 5000K	Lens	Glass
Adapter	Luxam Micro Track	LED	SMD CERAMIC
Dimmable Options	On board Dimmer: PWM, range 0-100%	Class	III, Indoor use only
CRI	95 min	Rating	IP30
Weight	44g	Dimensions	38*24*360 (mm)
Main Material	Aluminum	Lenght of Tail	145cm

PHOTOMETRICS

7°

70°

Distance (m)				
1088 lux	Ø61mm	0.5m	640 lux	Ø700mm
272 lux	Ø122mm	1m	160 lux	Ø1400mm
121 lux	Ø183mm	1.5m	71 lux	Ø2101mm
68 lux	Ø245mm	2m	40 lux	Ø2801mm
44 lux	Ø306mm	2.5m	26 lux	Ø3501mm

DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
DMX-25-150-900-U1P1	Constant Current driver with DMX control, 25W, 1 channel	4 - 19	250mA (10-54V)
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	4 - 15	250mA (9-42V)
SE-30-200-800-W1A	Constant Current driver with 0-10V control, 30W, 1 channel	4 - 15	250mA (9-42V)
SOLODRIVE 12W/S SL12S-M1Z1A1 (ELDOLED 12W 0-10V)	Constant current driver with 0-10V control, 12W, 1 channel	1 - 13	250mA (2-42V)

VARIATIONS



L-MSPS-30
0.7W SPOTLIGHT

Please check product cut sheets for details - driver indications vary per product.