




L-MFSA-22
6W QUADRI-STANDALONE



PRODUCT CUTSHEET



SCAN
FOR WEBSITE

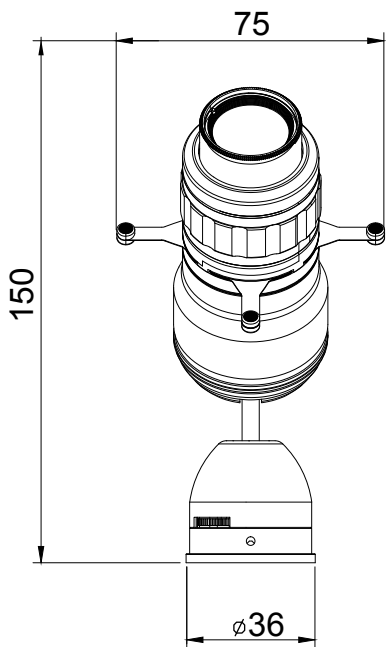

L-MFSA-20

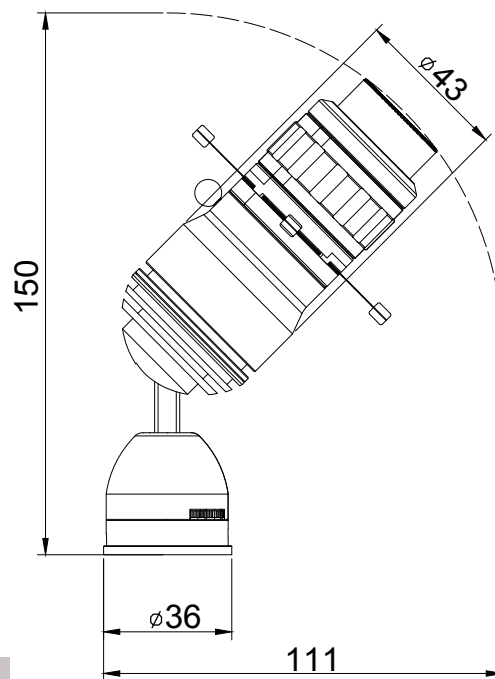

L-MTFHQ-20



FEATURES

- Fixed 55° framing shutter lens
- Complete dimming control with onboard dimmer
- Optional magnetic base
- Easy interchangeability between 3 head options using the same base unit

- Available accessories include L-MTFHQ-20 Filter 6W Holder and Gobo (ø28mm filter size)

No tools are needed for mounting and focusing the fixtures.*

* to lock the rotation axes and focus point 1.5mm and 0.9mm HEX drivers are required.

AVAILABLE ACCESSORIES




L-MTFHQ
FILTER HOLDER

TECHNICAL DATA


Voltage	11-24 VDC	Color Finishing	Black, White and Silver
LED Wattage	6W	Storage Temperature	Recommended 22°C
Wattage Once Used	7.8W	Certificates / Standard	UL, CE
Input Current	700-330mA	Warranty	5 years
Beam Angles	55°	Drivers Compatible	Constant Voltage
Pan / Tilt	355° / 90°	Lifespan	50 000 hours
Luminous Efficiency of the LED	100lm/W @RA97 min	Lens	Glass
Color Temperatures	3000K, 4000K, 5000K	LED	SMD CERAMIC
Adapter	Luxam Micro Track	Class	III, Indoor use only
Dimmable Options	Surface mount	Rating	IP30
CRI	97 min	Dimensions	93*43*149 (mm)
Weight	337g	Length of Tail	145cm
Main Material	Aluminum		

PHOTOMETRICS

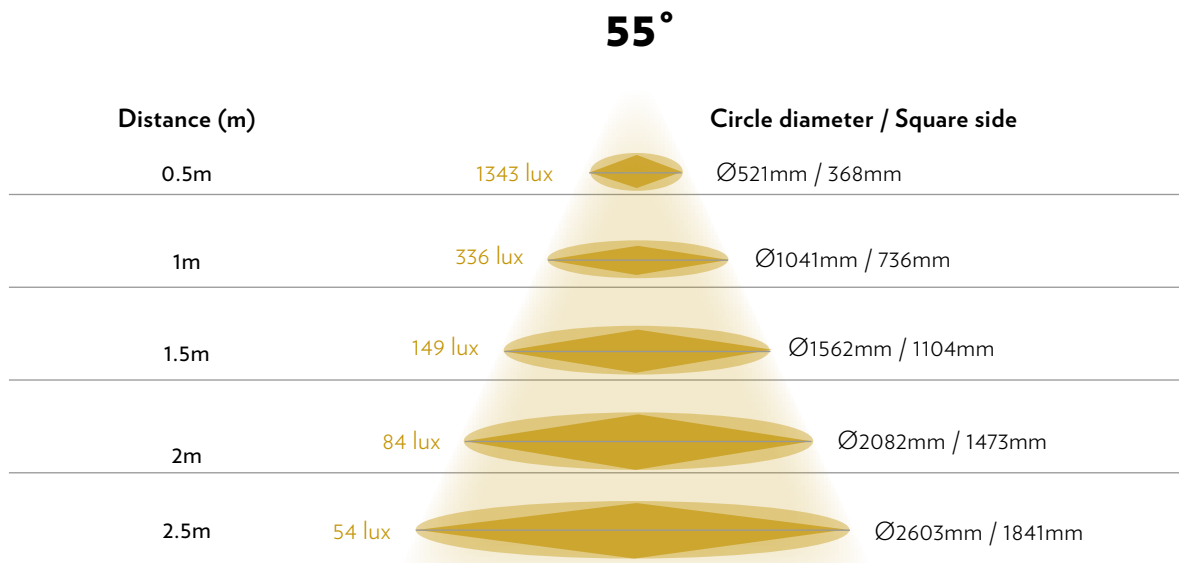



6W Spotlights transforms seamlessly between Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights. With a single body design, you can easily switch between standard spotlight functionality and framing shutter spotlight capabilities.

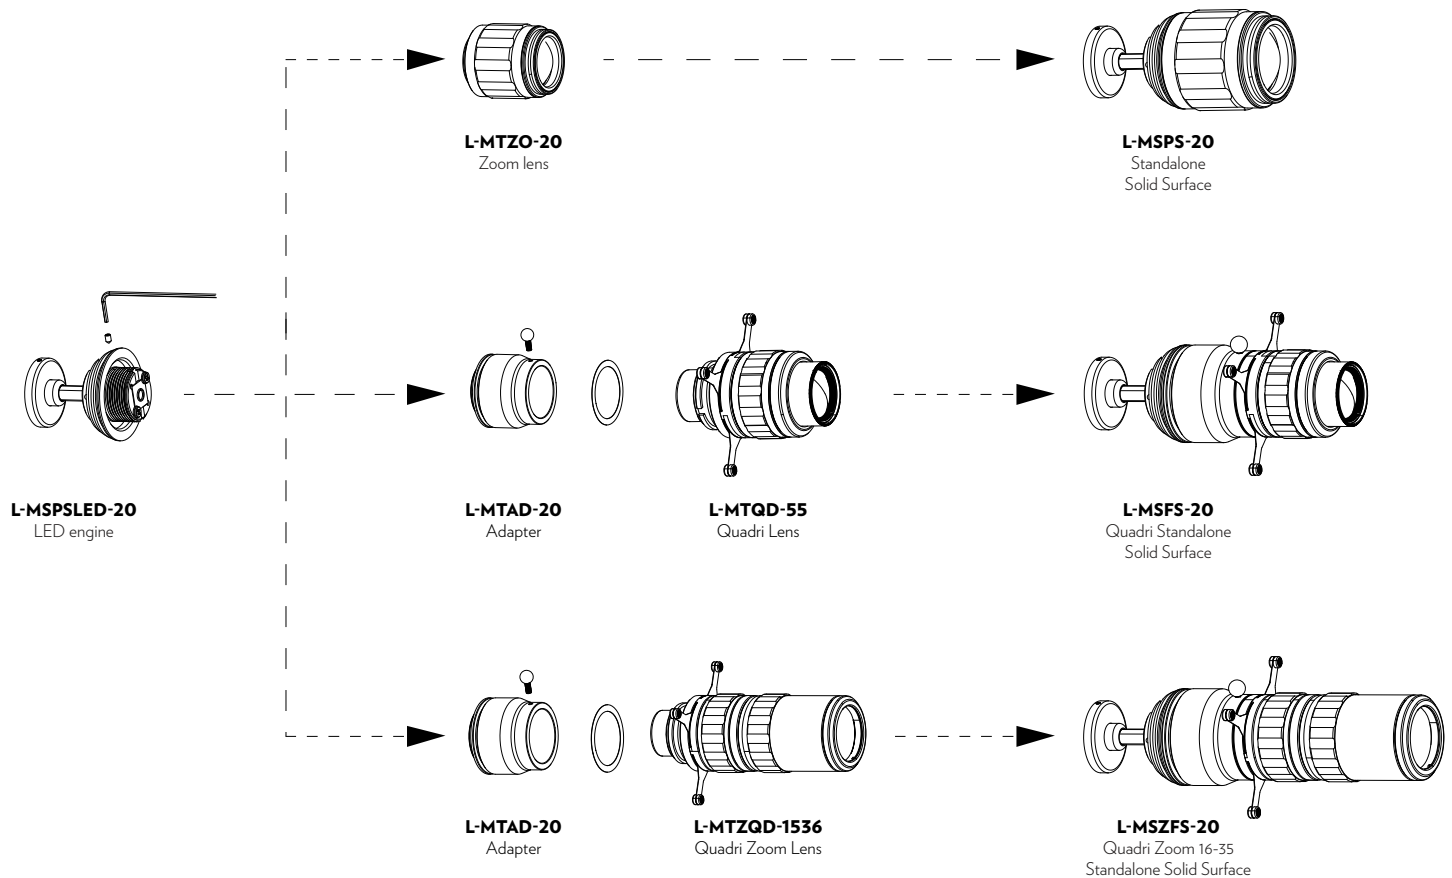


DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
LPV-100-12	Constant Voltage driver, 100W	1 - 10	12V
LPV-60-12	Constant Voltage driver, 60W	1 - 6	12V
LPV-35-12	Constant Voltage driver, 35W	1 - 3	12V
NPF-90-12	Constant Voltage driver, 90W	1 - 9	12V
NPF-40-12	Constant Voltage driver, 40W	1 - 4	12V

GOBO DETAILS

A Gobo adds depth and texture to your lighting setup.
The L-MFSA-22 6W Quadri Standalone accommodates gobos with 19.7mm outer diameter, 14.5mm inner diameter, and 0.3mm-1mm thickness. Compatible options include glass, stainless steel, full color glass, and plastic gobos.

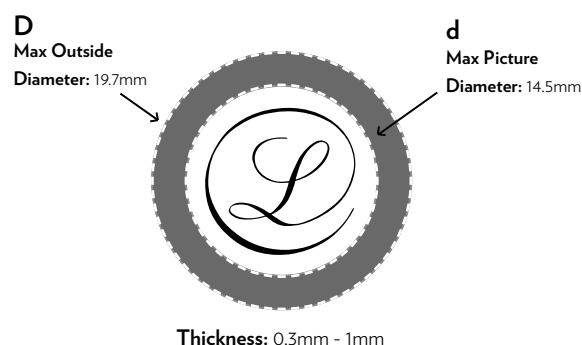

LENS CODES: L-MTZQ-1536 and L-MTQD-55

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.