




L-MSFS-20
6W QUADRI-STANDALONE
SOLID SURFACE


PRODUCT CUTSHEET



SCAN
FOR WEBSITE

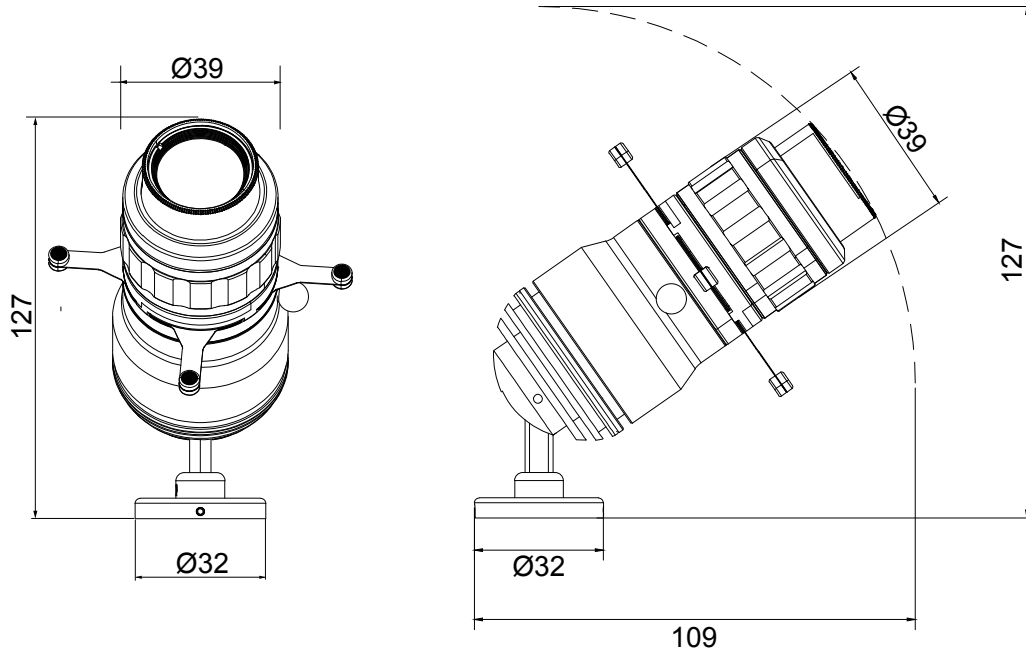

L-MSFS-20



L-MTFHQ-20



FEATURES

- Fixed 55° framing shutter lens
- Remote dimming capabilities with multiple control options including 0-10V and DMX
- Easy interchangeability between 3 head options using the same base unit

- Optional magnetic base
- Available accessories include L-MTFHQ-20 Filter 6W Holder and Gobo (Ø28mm filter size)

No tools are needed for mounting and focusing the fixtures.*

* to lock the rotation axes and focus point 1.5mm and 0.9mm HEX drivers are required.

AVAILABLE ACCESSORIES




L-MTFHQ-20
FILTER HOLDER



TECHNICAL DATA


LED Wattage	6W	Color Finishing	Black, White and Silver
Wattage Once Used	6W	Storage Temperature	Recommended 22°C
Input Current	165mA	Certificates / Standard	UL, CE
Beam Angles	55°	Warranty	5 years
Pan / Tilt	355° / 90°	Drivers Compatible	Constant Current
Luminous Efficiency of the LED	100lm/W @RA97 min	Lifespan	50 000 hours
Color Temperatures	3000K, 4000K, 5000K	Lens	Glass
Adapter	Surface mount	LED	SMD CERAMIC
Dimmable Options	Dimmable with PWM driver	Class	III, Indoor use only
CRI	97 min	Rating	IP30
Weight	271g	Dimensions	93*75*108 (mm)
Main Material	Aluminum	Length of Tail	145cm

PHOTOMETRICS

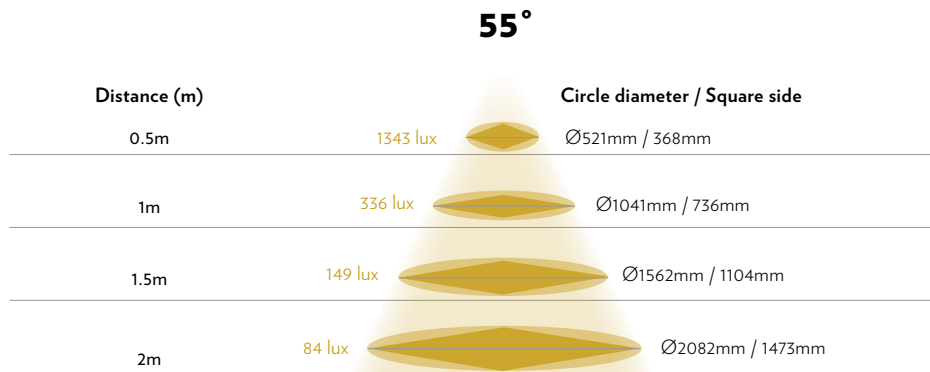

GOBO DETAILS


A Gobo adds depth and texture to your lighting setup. The L-MSFS-20 6W Quadri Standalone accommodates gobos with 19.7mm outer diameter, 14.5mm inner diameter, and 0.3mm-1mm thickness. Compatible options include glass, stainless steel, full color glass, and plastic gobos.

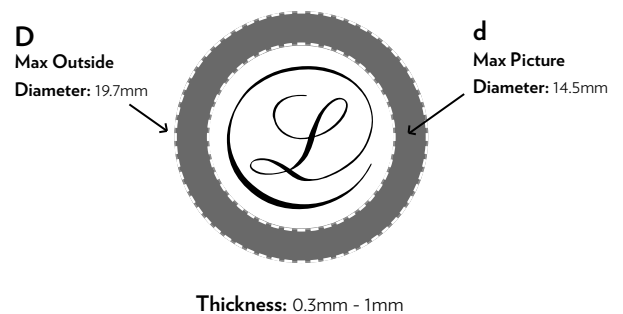

LENS CODES: L-MTZQ-1536 and L-MTQD-55



6W Spotlights transforms seamlessly between Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights. With a single body design, you can easily switch between standard spotlight functionality and framing shutter spotlight capabilities.

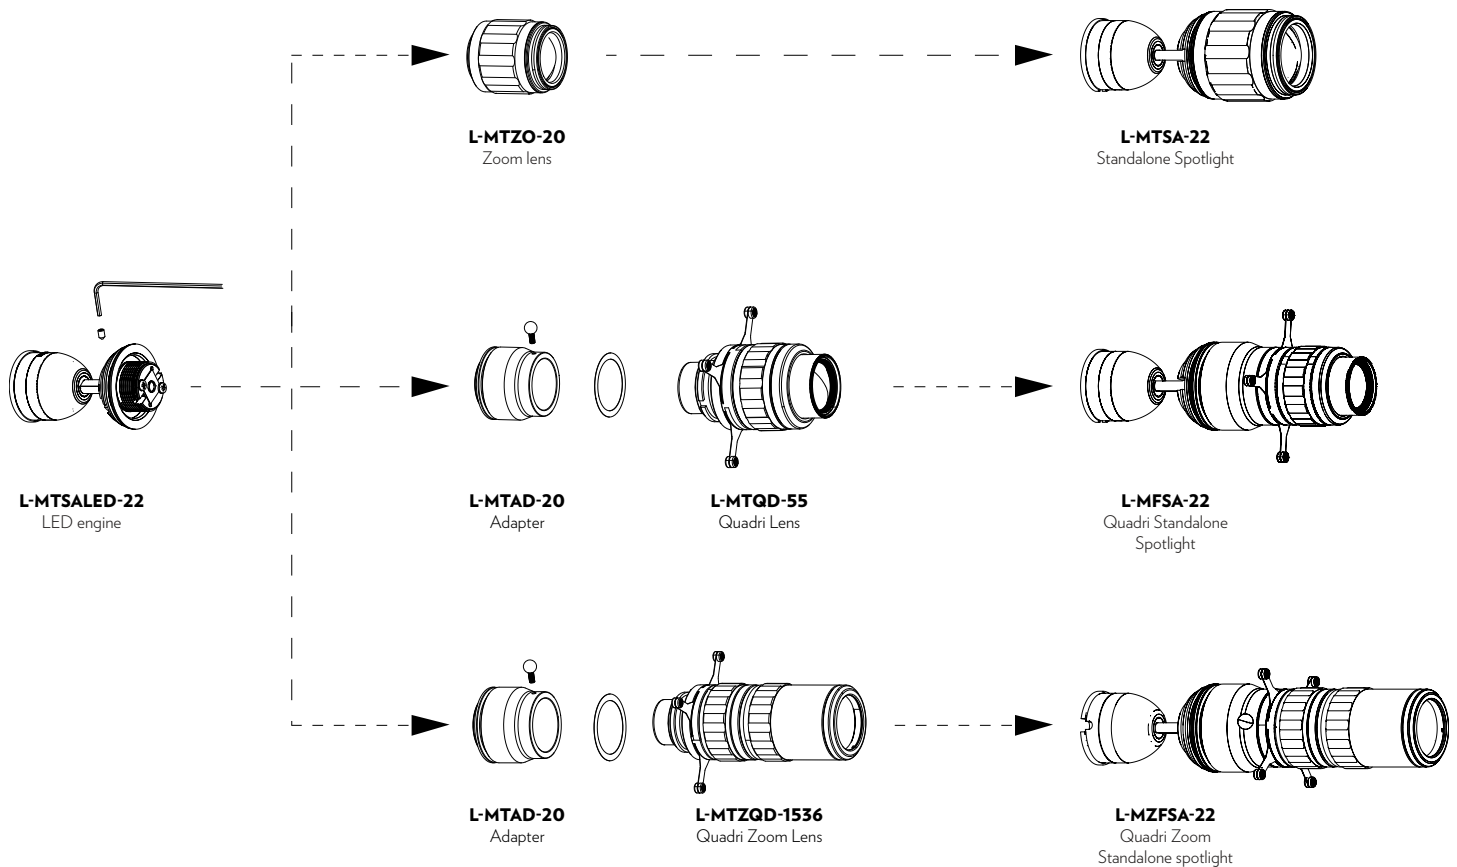

DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	1 - 1	165mA (9-42V)
OT 12W UNV 0A3 DUALDIM DIM-1 F	Constant current driver with 0-10V control, 12W, 1 channel	1 - 1	165mA (26-42V)
DMX-25-150-900-U1P1	Constant Current driver with DMX control, 25W, 1 channel	1 - 1	150mA (10-54V)
L-CT-DMX/RDW-6W-6CH	Constant Current driver with manual/DMX control, 6W x 6 channels*	1 per channel	165mA (35.5V)
SOLOdrive 12W/S SL12S-M1Z1A1 (eldoled 12W)	Constant current driver with 0-10V control, 12W, 1 channel	1	165mA (2-42V)

*To use with 6W L-MS...-20 spotlights only

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.