



**L-MTSP-22**  
**6W SPOTLIGHT**


PRODUCT CUTSHEET



**SCAN**  
TO VIEW VIDEO



**SCAN**  
FOR WEBSITE

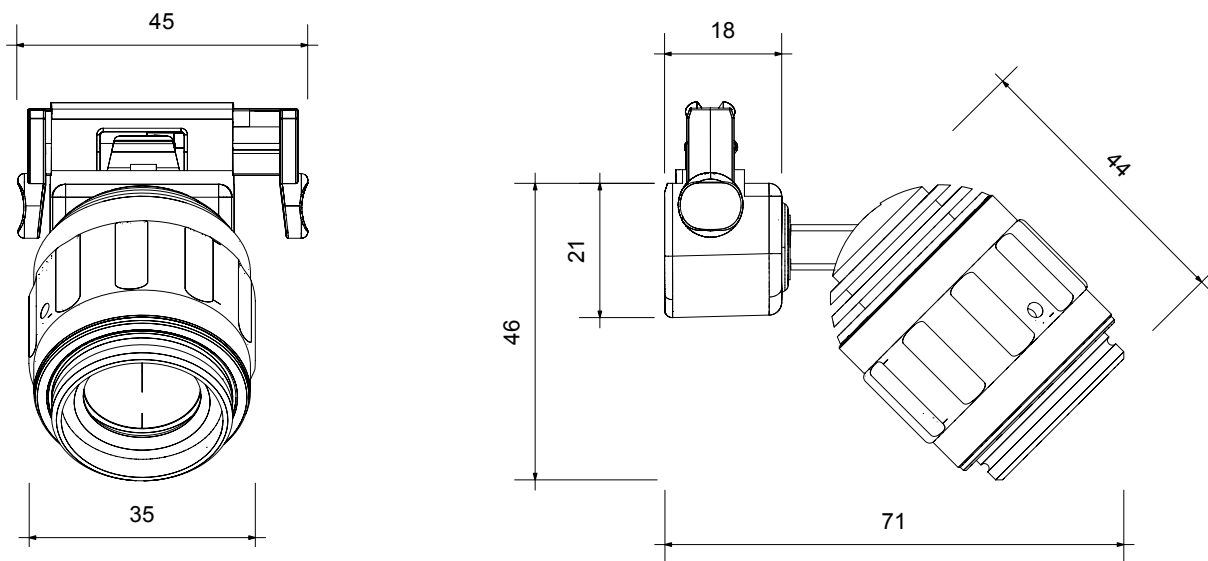

## FEATURES

- Focusable from 8° to 55°
- Complete dimming control with onboard dimmer
- Easy interchangeability between 3 head options using the same base unit
- Full compatibility with all MicroTrack systems
- Full range of accessories include Barndoors, Snoots & Filter Frames

No tools are needed for mounting and focusing the fixtures\*

\*to lock the rotation axes and focus point 1.5mm and 0.9mm HEX drivers are required.

## AVAILABLE ACCESSORIES



**L-MTAS-20**  
ANGLED  
SNOOT



**L-MTBD-20**  
BARNDOOR



**L-MTFH-20**  
FILTER HOLDER




**L-MTAR-20**  
ARCHITECTURAL LENSE


## TECHNICAL DATA

|                                |                                   |                         |                         |
|--------------------------------|-----------------------------------|-------------------------|-------------------------|
| Voltage                        | 11-24 VDC                         | Main Material           | Aluminum                |
| Led Wattage                    | 6W                                | Color Finishing         | Black, White and Silver |
| Wattage Once Used              | 7.8W                              | Storage Temperature     | Recommended 22°C        |
| Input Current                  | 700-330mA                         | Certificates / Standard | UL, CE                  |
| Beam Angles                    | Zoomable 8° to 55°                | Warranty                | 5 years                 |
| Pan / Tilt                     | 355° / 90°                        | Drivers Compatible      | Constant Voltage        |
| Luminous Efficiency of the LED | 100lm/W @RA97 min                 | Lifespan                | 50 000 hours            |
| Color Temperatures             | 3000K, 4000K, 5000K               | Lens                    | Glass                   |
| Adapter                        | Luxam Micro Track                 | LED                     | SMD CERAMIC             |
| Dimmable Options               | Onboard Dimmer: PWM, range 0-100% | Class                   | III, Indoor use only    |
| CRI                            | 97 min                            | Rating                  | IP30                    |
| Weight                         | 157g                              | Dimensions              | 108*45*85 (mm)          |

## PHOTOMETRICS

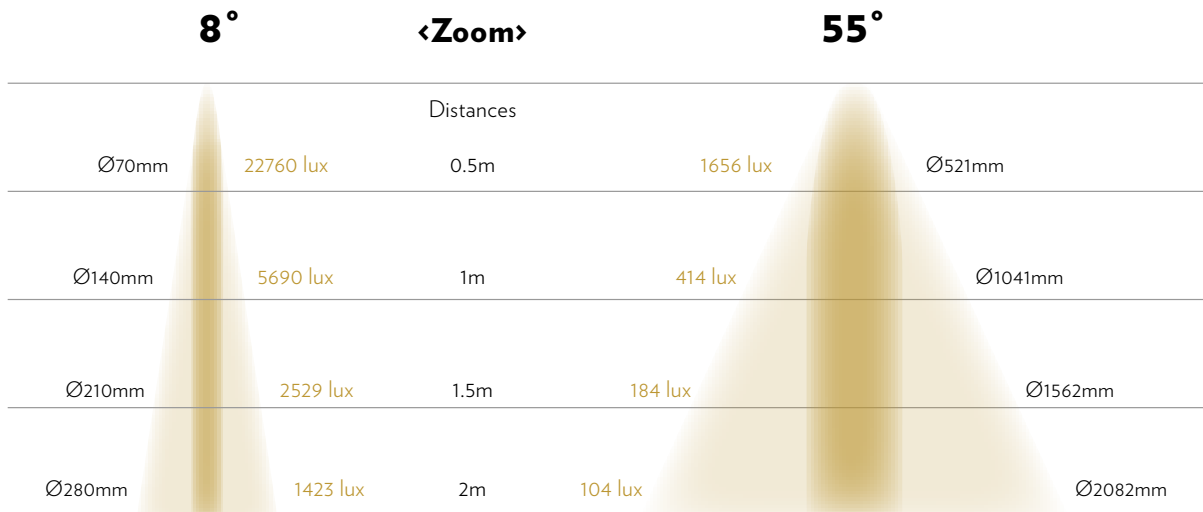

6W Spotlights transforms seamlessly between Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights. With a single body design, you can easily switch between standard spotlight functionality and framing shutter spotlight capabilities.

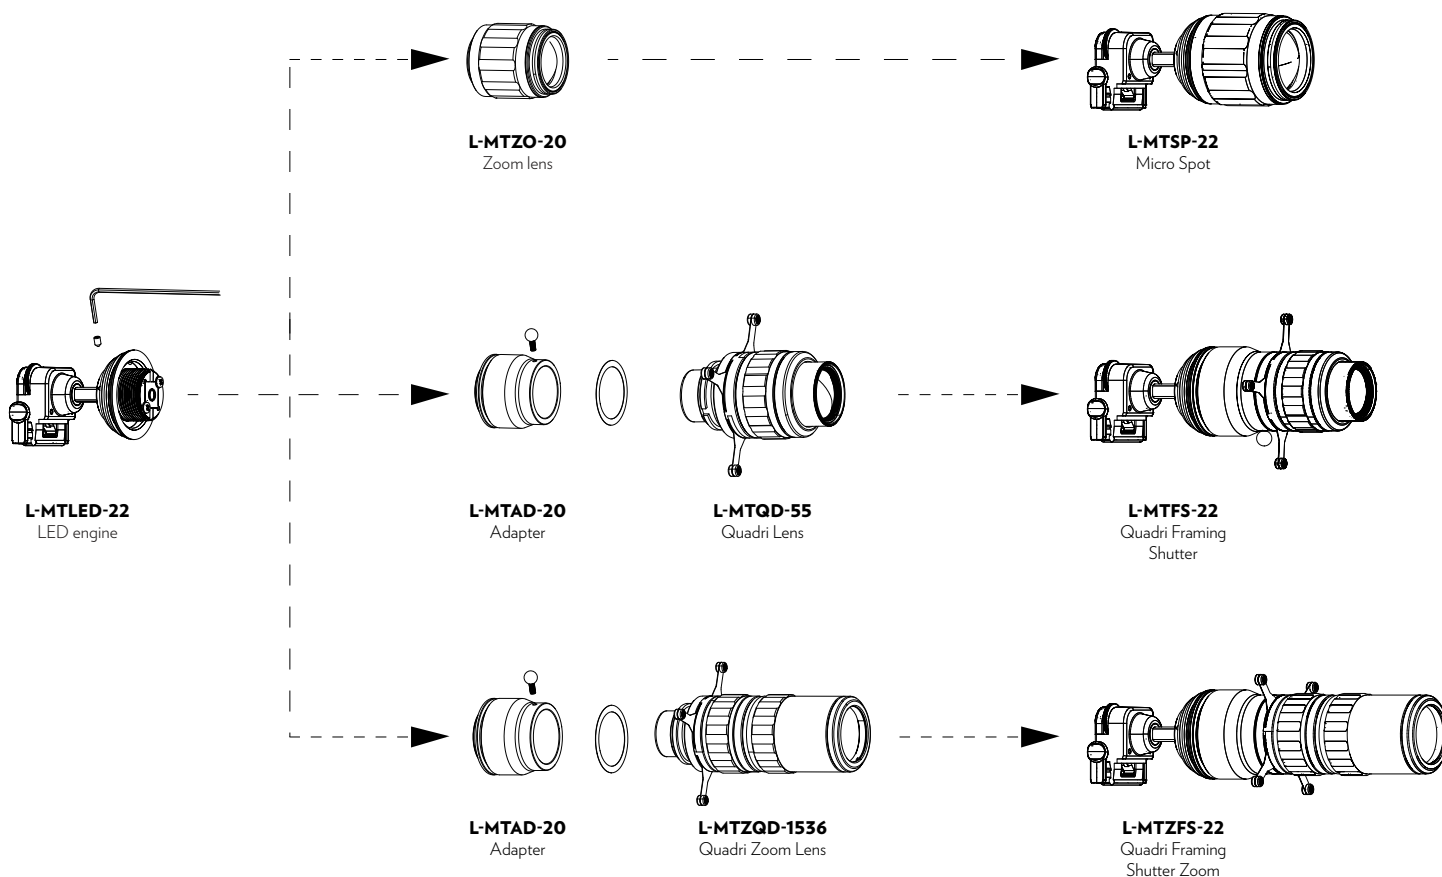

## DRIVERS COMPATIBLE

| Driver     | Short Description             | Nbr of Fixtures | Setting |
|------------|-------------------------------|-----------------|---------|
| LPV-100-12 | Constant Voltage driver, 100W | 1 - 10          | 12V     |
| LPV-60-12  | Constant Voltage driver, 60W  | 1 - 6           | 12V     |
| LPV-35-12  | Constant Voltage driver, 35W  | 1 - 3           | 12V     |
| NPF-90-12  | Constant Voltage driver, 90W  | 1 - 9           | 12V     |
| NPF-40-12  | Constant Voltage driver, 40W  | 1 - 4           | 12V     |

## VARIATIONS



Please check product cut sheets for details - driver indications vary per product.