





**L-MFSA-22**  
**6W QUADRI-STANDALONE**


PRODUCT CUTSHEET



**SCAN**  
FOR WEBSITE

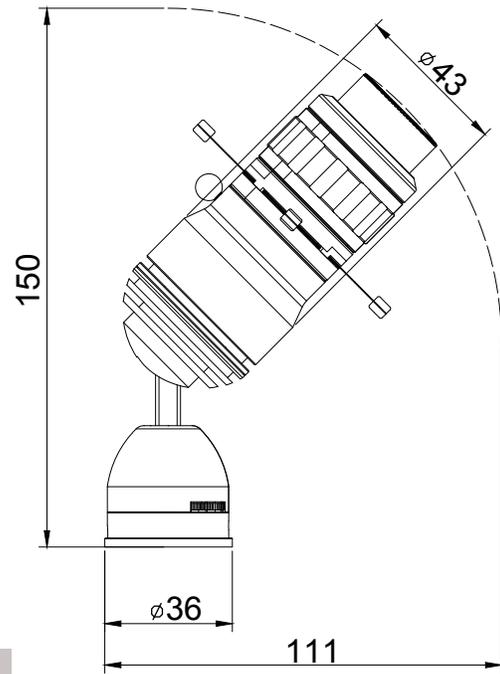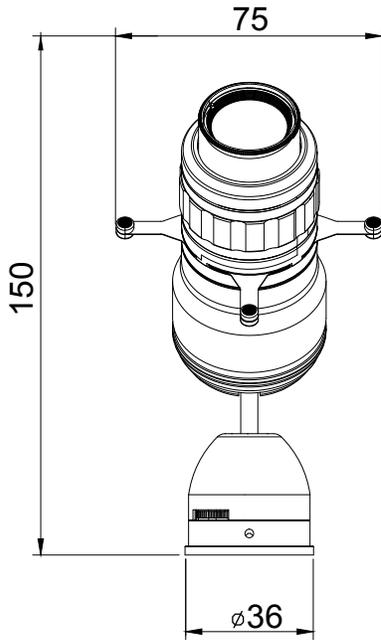

L-MFSA-20



L-MTFHQ-20



## FEATURES

- Fixed 55° framing shutter lens
- Complete dimming control with onboard dimmer
- Optional magnetic base
- Easy interchangeability between 3 head options using the same base unit
- Available accessories include L-MTFHQ-20 Filter 6W Holder and Gobo (ø28mm filter size)
- No tools are needed for mounting and focusing the fixtures.\*
- \* to lock the rotation axes and focus point 1.5mm and 0.9mm HEX drivers are required.

## AVAILABLE ACCESSORIES




L-MTFHQ  
FILTER HOLDER

TECHNICAL DATA


<b>Voltage</b>	11-24 VDC	<b>Color Finishing</b>	Black, White and Silver
<b>LED Wattage</b>	6W	<b>Storage Temperature</b>	Recommended 22°C
<b>Wattage Once Used</b>	7.8W	<b>Certificates / Standard</b>	UL, CE
<b>Input Current</b>	700-330mA	<b>Warranty</b>	5 years
<b>Beam Angles</b>	55°	<b>Drivers Compatible</b>	Constant Voltage
<b>Pan / Tilt</b>	355° / 90°	<b>Lifespan</b>	50 000 hours
<b>Luminous Efficiency of the LED</b>	100lm/W @RA97 min	<b>Lens</b>	Glass
<b>Color Temperatures</b>	3000K, 4000K, 5000K	<b>LED</b>	SMD CERAMIC
<b>Adapter</b>	Luxam Micro Track	<b>Class</b>	III, Indoor use only
<b>Dimmable Options</b>	Surface mount	<b>Rating</b>	IP30
<b>CRI</b>	97 min	<b>Dimensions</b>	93*43*149 (mm)
<b>Weight</b>	337g	<b>Length of Tail</b>	145cm
<b>Main Material</b>	Aluminum		

PHOTOMETRICS

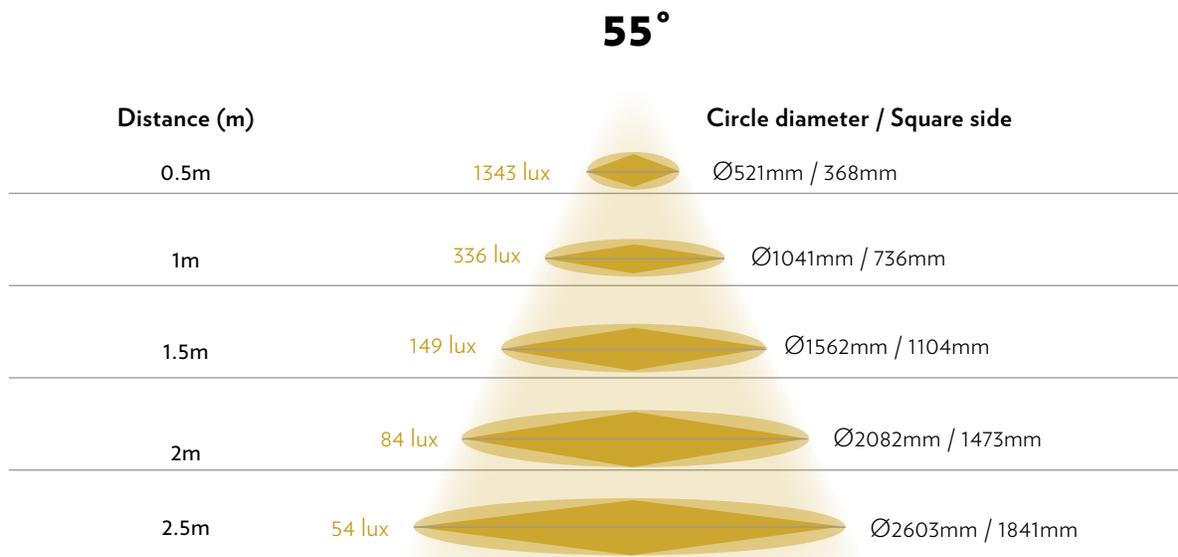



6W Spotlights transforms seamlessly between Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights. With a single body design, you can easily switch between standard spotlight functionality and framing shutter spotlight capabilities.

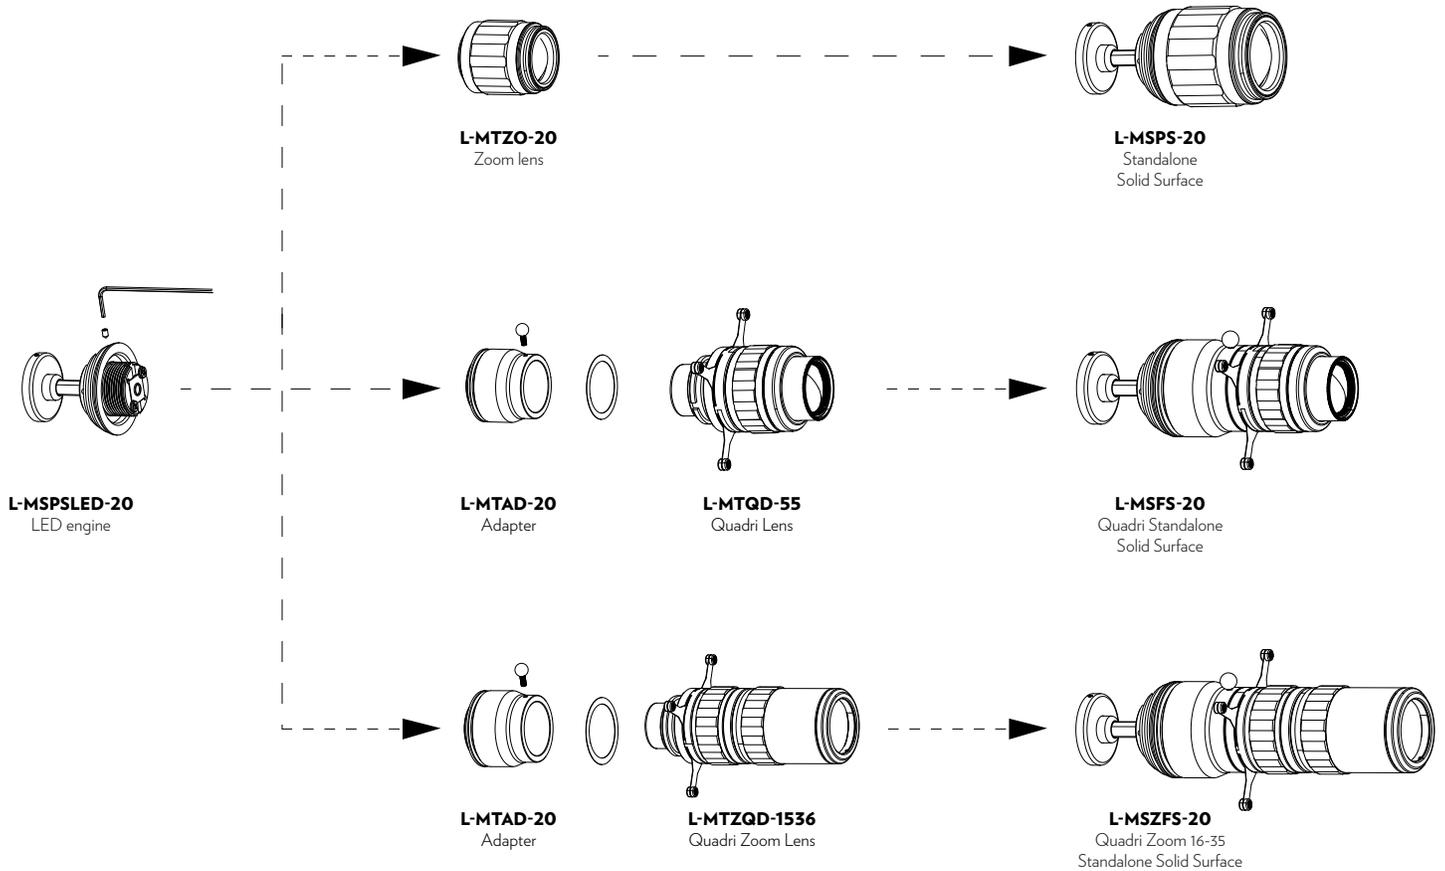


**DRIVERS COMPATIBLE**

Driver	Short Description	Nbr of Fixtures	Setting
LPV-100-12	Constant Voltage driver, 100W	1 - 10	12V
LPV-60-12	Constant Voltage driver, 60W	1 - 6	12V
LPV-35-12	Constant Voltage driver, 35W	1 - 3	12V
NPF-90-12	Constant Voltage driver, 90W	1 - 9	12V
NPF-40-12	Constant Voltage driver, 40W	1 - 4	12V

**GOBO DETAILS**

A Gobo adds depth and texture to your lighting setup. The L-MFSA-22 6W Quadri Standalone accommodates gobos with 19.7mm outer diameter, 14.5mm inner diameter, and 0.3mm-1mm thickness. Compatible options include glass, stainless steel, full color glass, and plastic gobos.

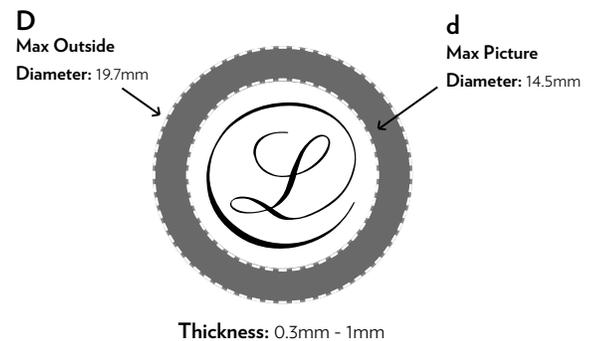

**LENS CODES:** L-MTZQ-1536 and L-MTQD-55

**VARIATIONS**



Please check product cut sheets for details - driver indications vary per product.