




**L-MTZFS-22 | 6W SPOTLIGHT
QUADRI ZOOM FRAMING SHUTTER**

PRODUCT CUTSHEET



SCAN
FOR WEBSITE

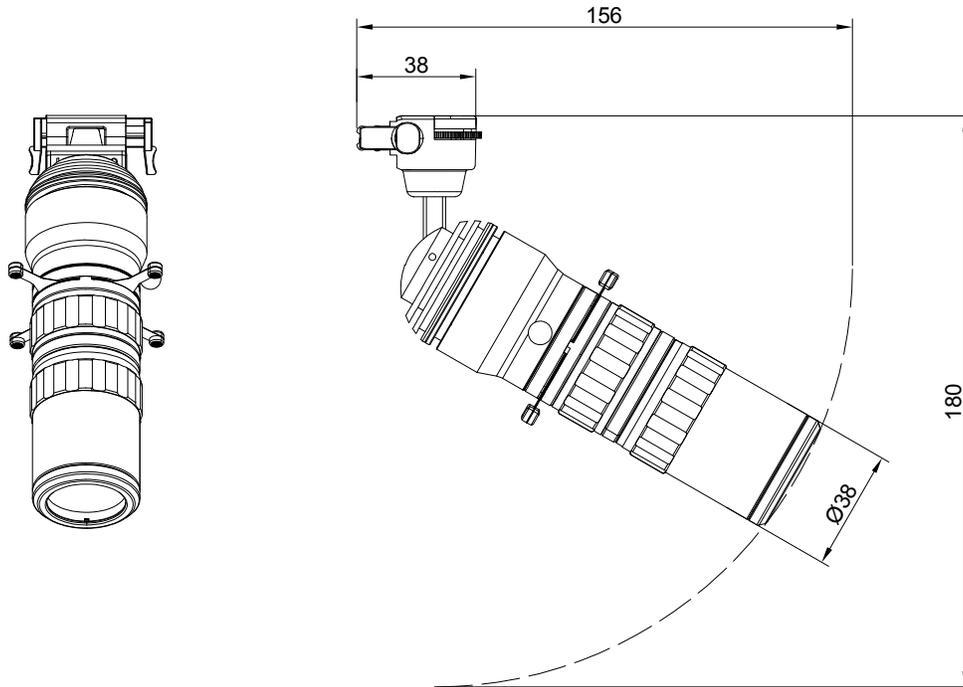

FEATURES

- Zoom 15-36° framing shutter lens
- Easy interchangeability between 3 head options using the same base unit
- Compact design: 350g total weight, 215g FS weight
- Dimensions: 180 x 50 x 44mm (180 x 76 x 76mm with open blades)
- Available accessories include L-MTFHZQ-20 Filter 6W Holder Zoom Quadri and Gobo (ø37mm filter size)

6W ACCESSORIES



L-MTAS-20
ANGLED SNOOT



L-MTBD-20
BARNDOOR



L-MTFH-20
FILTER HOLDER



L-MTFHZQ-20
FILTER HOLDER

TECHNICAL DATA

Voltage	11-24 VDC	Color Finishing	Black, White and Silver
LED Wattage	6W	Working Temperature	Recommended 10°C to 25°C *
Wattage Once Used	7.8W	Storage Temperature	Recommended 22°C
Input Current	700-330mA	Certificates / Standard	UL, CE
Beam Angles	15-36°	Warranty	5 years
Pan / Tilt	355° / 90°	Drivers Compatible	Constant Voltage
Luminous Efficiency of the LED	100lm/W @RA97 min	Lifespan	50 000 hours
Color Temperatures	3000K, 4000K, 5000K	Lens	Glass
Adapter	Luxam Micro Track	LED	SMD CERAMIC
Dimmable Options	Onboard Dimmer: PWM, range 0-100%	Class	III, Indoor use only
CRI	97 min	Rating	IP30
Weight	347g	Dimensions	133*75*151 (mm)
Main Material	Aluminum		



PHOTOMETRICS

15°


Distance (m)		Circle diameter / Square side
0.5m	11256 lux	Ø132mm / 93mm
1m	2814 lux	Ø263mm / 186mm
1.5m	1251 lux	Ø395mm / 279mm
2m	704 lux	Ø527mm / 372mm
2.5m	450 lux	Ø658mm / 466mm

36°

Distance (m)		Circle diameter / Square side
0.5m	2776 lux	Ø325mm / 230mm
1m	694 lux	Ø650mm / 460mm
1.5m	308 lux	Ø975mm / 689mm
2m	174 lux	Ø1300mm / 919mm
2.5m	111 lux	Ø1625mm / 1149mm




6W Spotlights transforms seamlessly between Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights. With a single body design, you can easily switch between standard spotlight functionality and framing shutter spotlight capabilities.

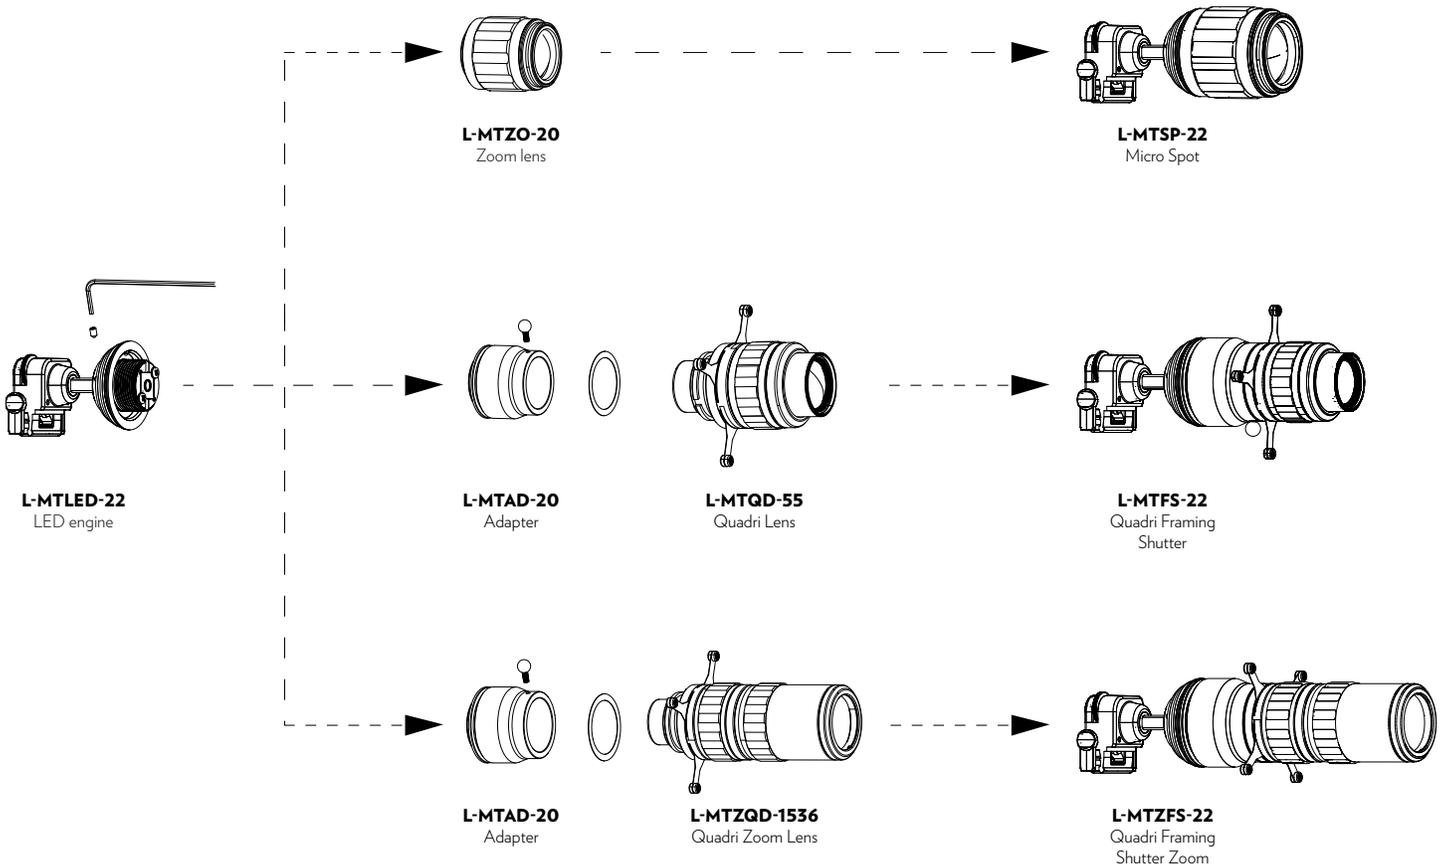

GOBO DETAILS

A Gobo adds depth and texture to your lighting setup. The L-MTZFS-22 6W Quadri Zoom Framing-Shutter accommodates gobos with 19.7mm outer diameter, 14.5mm inner diameter, and 0.3mm-1mm thickness. Compatible options include glass, stainless steel, full color glass, and plastic gobos.

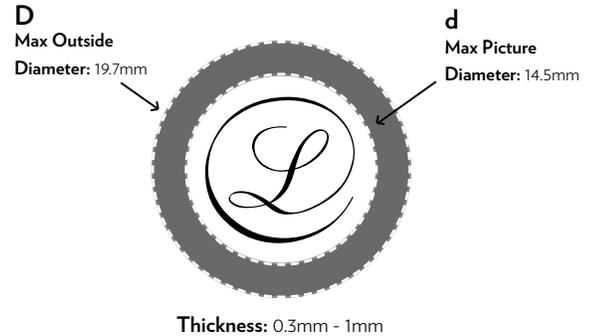

LENS CODES: L-MTZQ-1536 and L-MTQD-55

DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
LPV-60-24	Constant Voltage driver, 60W	1 - 6	24v
LPV-100-24	Constant Voltage driver, 100W	1 - 11	24v
LPV-150-24	Constant Voltage driver, 150W	1 - 18	24v

SCREW SIZES Focus and Articulation: 1.5mm

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.