




L-UPL-30-1

STANDALONE STEM

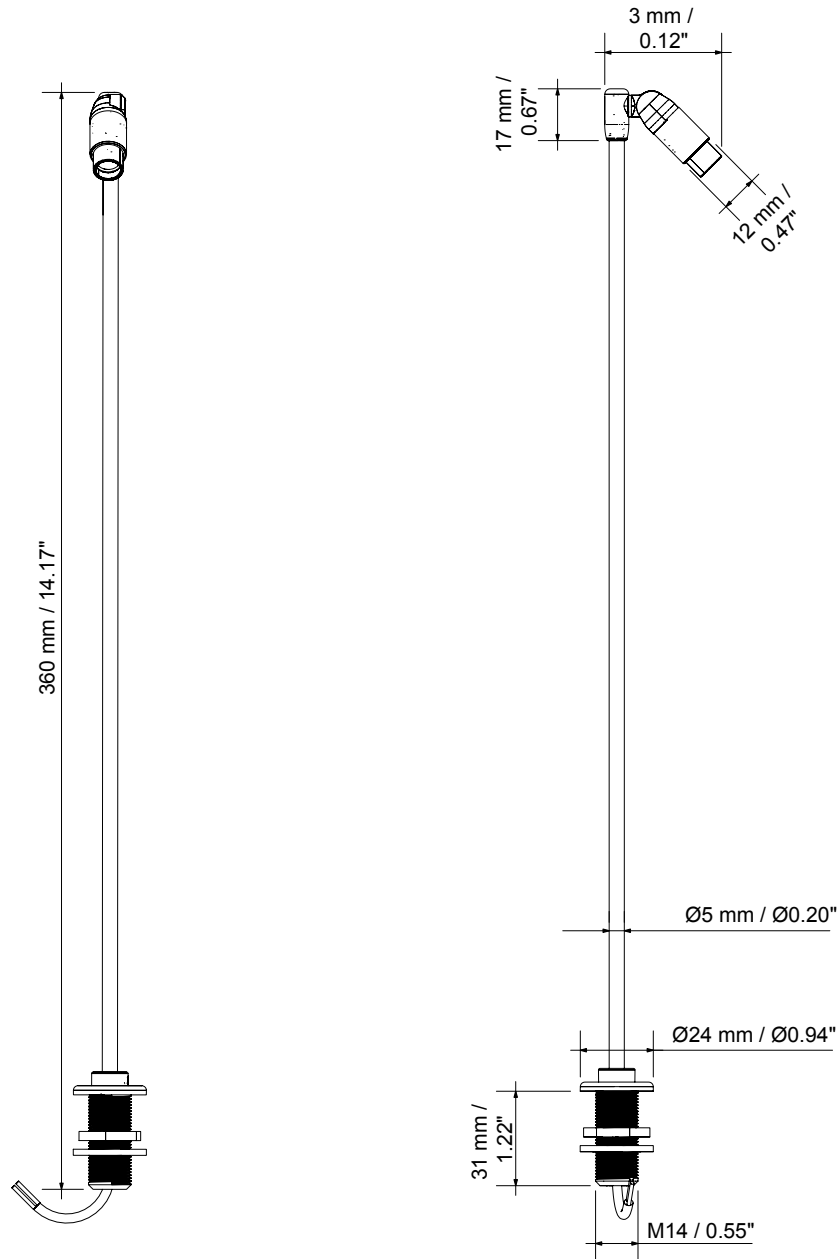

FEATURES

- Stem 1 has a single stationary spot light
- Stem 1 comes with a 5mm rod with adjustable height.
- Focusable from 7° to 70°
- These fixtures need to be wired together in series.

TECHNICAL DATA

LED Wattage	0.7W	Color Finishing	Black, White and Silver
Wattage Once Used	0.7W	Storage Temperature	recommended 22°C
Input Current	250mA Constant Current (connect in series)	Certificates / Standard	UL, CE
Beam Angles	Zoomable 7 to 70°	Warranty	5 years
Pan / Tilt	355° / 90°	Drivers Compatible	Constant Current
Luminous Efficiency of the LED	100lm/W @RA95 min	Lifespan	50 000 hours
Color Temperatures	3000K, 4000K, 5000K	Lens	Glass
Adapter	Luxam Micro Track	LED	SMD CERAMIC
Dimmable Options	On board Dimmer: PWM, range 0-100%	Class	III, Indoor use only
CRI	95 min	Rating	IP30
Weight	44g	Dimensions	38 × 24 × 360 (mm) / 1.5 × 0.9 × 14.2"
Main Material	Aluminum	Length of Tail	145cm

PHOTOMETRICS

7°
70°

Diameter	Illuminance	Distance (m/ft)	Diameter	Illuminance
Ø61mm	1088 lx / 101 fc	0.5 m / 1.6 ft.	Ø70 cm / 27.6"	160 lx / 15 fc
Ø122mm	272 lx / 25 fc	1.0 m / 3.3 ft.	Ø140 cm / 55.1"	40 lx / 4 fc
Ø183mm	121 lx / 11 fc	1.5 m / 4.9 ft.	Ø210.1 cm / 82.7"	18 lx / 2 fc
Ø245mm	68 lx / 6 fc	2.0 m / 6.6 ft.	Ø280.1 cm / 110.3"	10 lx / 1 fc
Ø306mm	44 lx / 4 fc	2.5 m / 8.2 ft.	Ø350.1 cm / 137.8"	6 lx / 1 fc

DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
DMX-25-150-900-U1P1	Constant Current driver with DMX control, 25W, 1 channel	4 - 19	250mA (10-54V)
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	4 - 15	250mA (9-42V)
SE-30-200-800-W1A	Constant Current driver with 0-10V control, 30W, 1 channel	4 - 15	250mA (9-42V)
SOLODRIVE 12W/S SL12S-M1Z1A1 (ELDOLED 12W 0-10V)	Constant current driver with 0-10V control, 12W, 1 channel	1 - 13	250mA (2-42V)

VARIATIONS



L-MSPS-30
0.7W SPOTLIGHT

Please check product cut sheets for details - driver indications vary per product.