
LUXAM
LIGHTING FOR MUSEUMS




L-MZFSA-22
6W STANDALONE QUADRI ZOOM FRAMING SHUTTER

PRODUCT CUTSHEET

SCAN
FOR WEBSITE

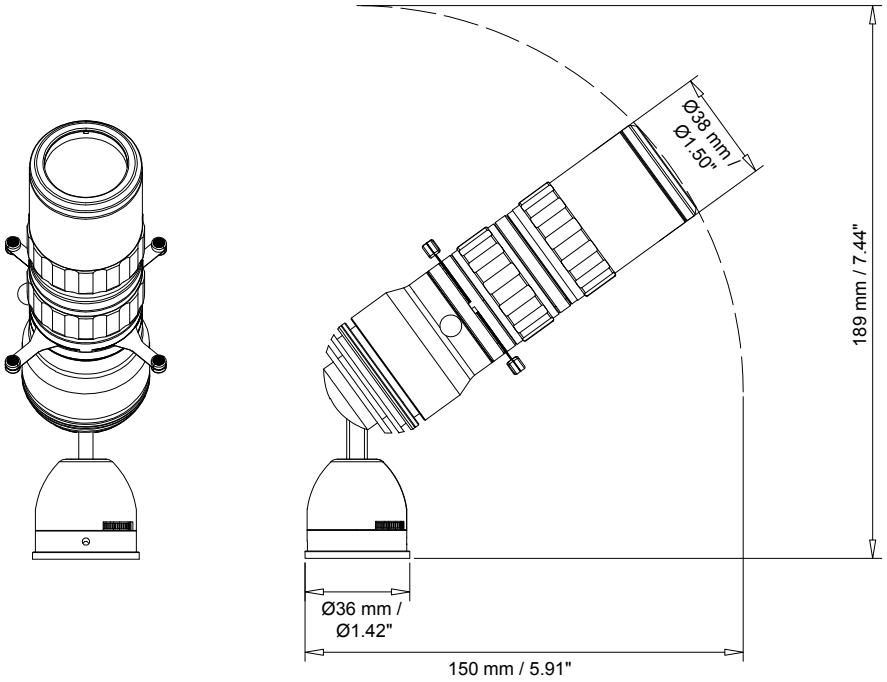

L-MSZFS-20



L-MTFHZQ-20

FEATURES

- Zoom 15-36° framing shutter lens
- Easy interchangeability between 3 head options using the same base unit
- Standalone version with magnetic and screw base options
- Available accessories include L-MTFHZQ-20 Filter 6W Holder Zoom Quadri and Gobo (Ø37 mm / Ø1.46")

AVAILABLE ACCESSORIES



L-MTFHZQ-20
FILTER HOLDER

luxam.com

LUXAM USA
12201 NW 35 Ste #534
Coral Springs, FL 33065
954 755 7254 | info@luxam.com

LUXAM FRANCE
80 rue du Dessous des Berges
75013 Paris
+33 982 272 946 | france@luxam.com

LUXAM GERMANY
Metzgerfeldweg 21
85737 Ismaning
+498951999651 | germany@luxam.com


LUXAM UK
184 Park Avenue
London NW10 7XL
info@luxam.com

TECHNICAL DATA


Voltage	11-24 VDC	**Color Finishing**	Black, White and Silver
LED Wattage	6W	**Storage Temperature**	Recommended 22°C
Wattage Once Used	7.8W	**Certificates / Standard**	UL, CE
Input Current	700-330mA	**Warranty**	5 years
Beam Angles	15-36°	**Drivers Compatible**	Constant Voltage
Pan / Tilt	355° / 90°	**Lifespan**	50 000 hours
Luminous Efficiency of the LED	100lm/W @RA97 min	**Lens**	Glass
Color Temperatures	3000K, 4000K, 5000K	**LED**	SMD CERAMIC
Adapter	Luxam Micro Track	**Class**	III, Indoor use only
Dimmable Options	Surface mount	**Rating**	IP30
CRI	97 min	**Dimensions**	122 × 43 × 161 (mm) / 4.8 × 1.7 × 6.3"
Weight	417g	**Length of Tail**	145cm
Main Material	Aluminum		

PHOTOMETRICS


15°

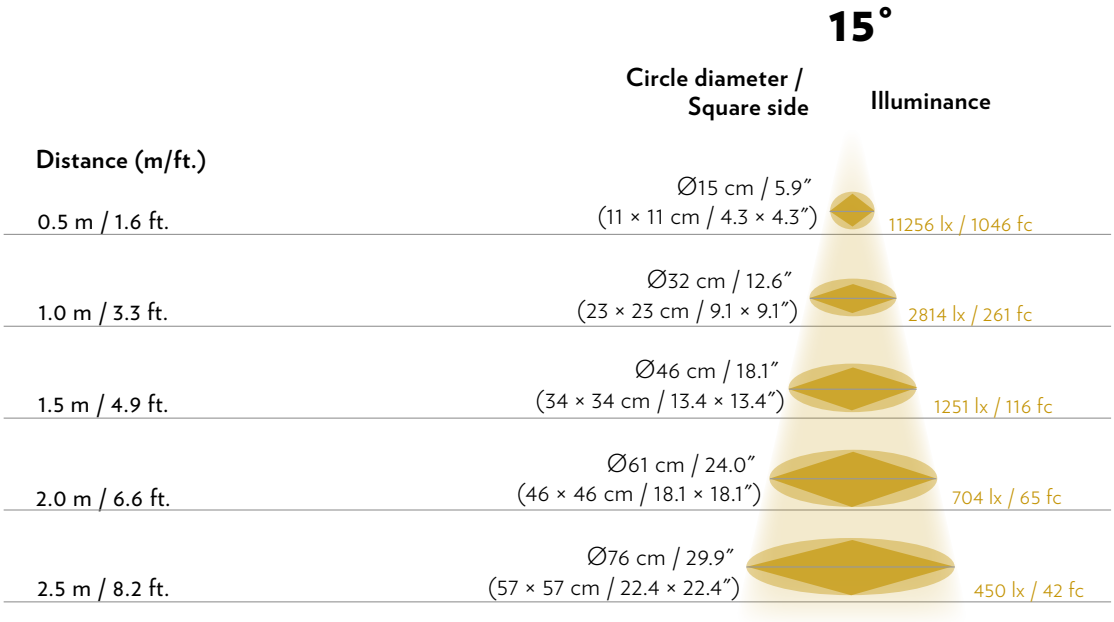

36°

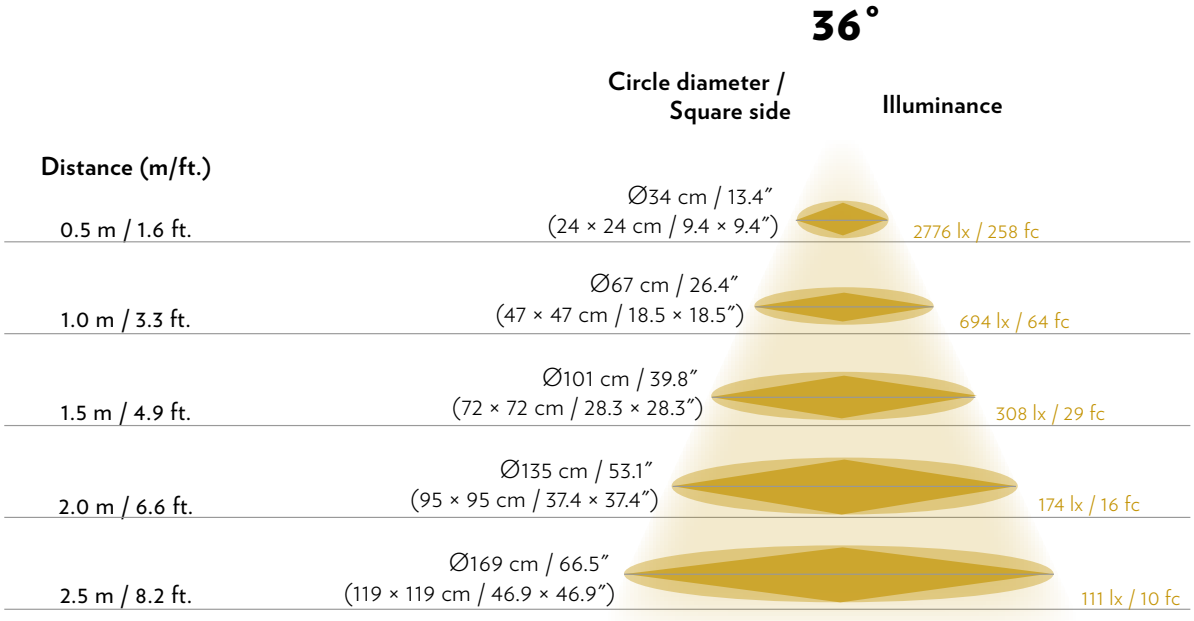


6W Spotlights transforms seamlessly between Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights. With a single body design, you can easily switch between standard spotlight functionality and framing shutter spotlight capabilities.

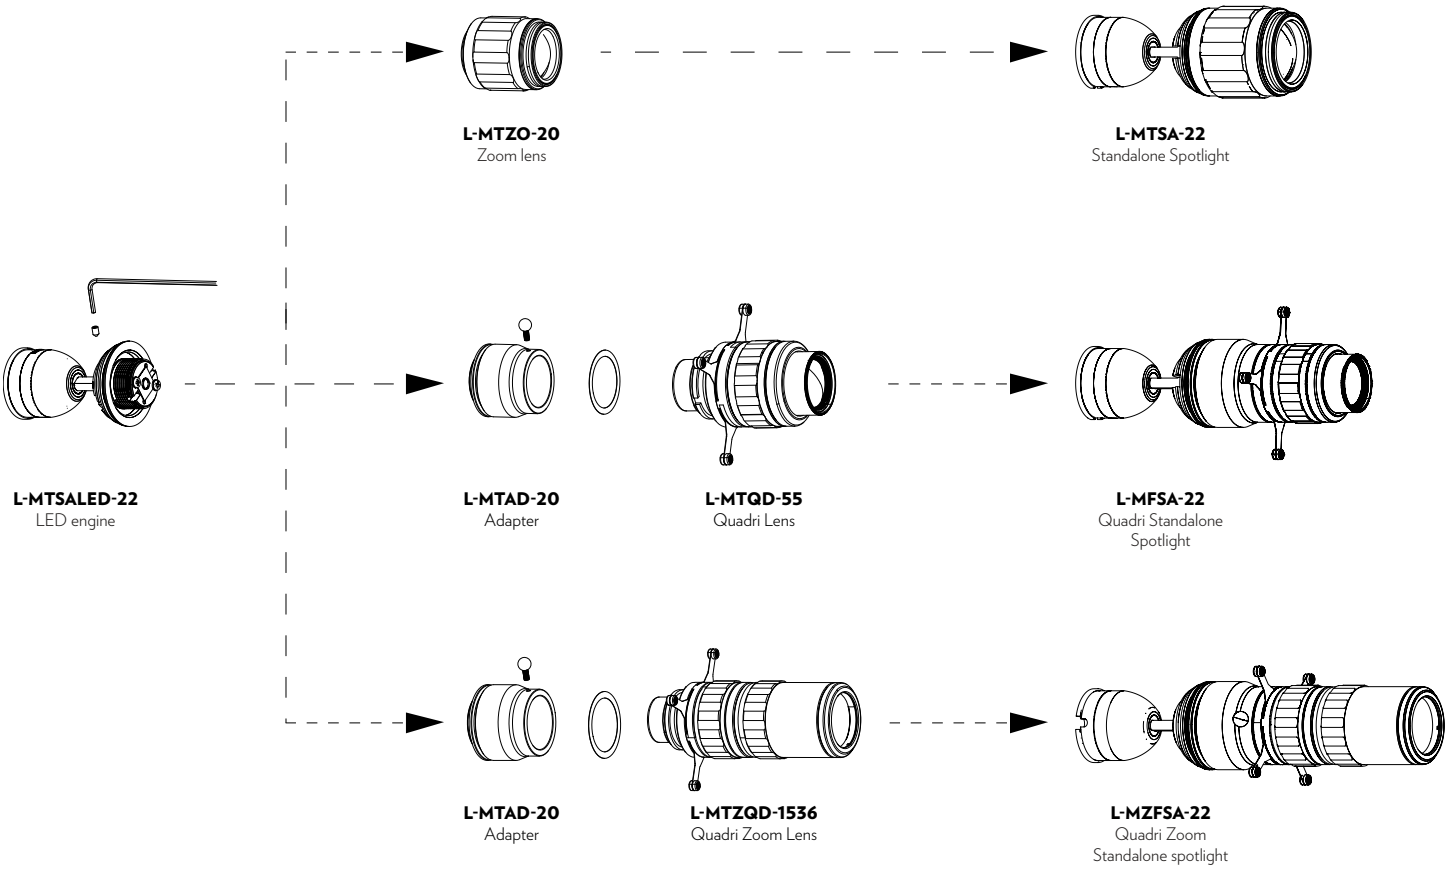

GOBO DETAILS

A Gobo adds depth and texture to your lighting setup. The L-MZFSA 6W Quadri Zoom Framing-Shutter accommodates gobos with 19.7 mm / 1.97 cm outer diameter, 14.5 mm / 1.45 cm inner diameter, and 0.3–1 mm / 0.03–0.1 cm thickness. Compatible options include glass, stainless steel, full color glass, and plastic gobos.

LENS CODES: L-MTZQ-1536 and L-MTQD-55

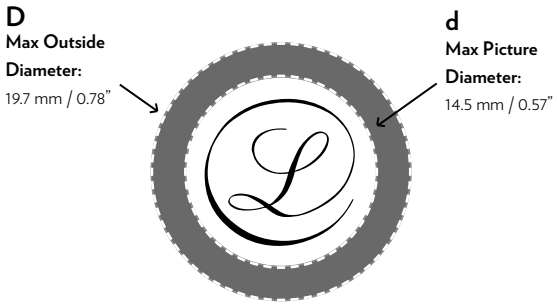

DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	1	165mA (9-42V)
OT 12W UNV 0A3 DUALDIM DIM-1 F	Constant Current driver with 0-10V control, 12W, 1 channel	1	165mA (26-42V)
DMX-25-150-900-U1P1	Constant Current driver with manual/ DMX control, 25W x 6 channels*	1	150mA (10-54V)
L-CT-DMX/RDW-6W-6CH	Constant Current driver with manual/ DMX control, 6W x 6 channels*	1 per channel	165mA (35.5V)

*To use with 6W L-MS..-20 spotlights only

VARIATIONS



L-MSPS-20
6W Standalone Solid Surface



L-MTSA-22
6W Standalone Spotlight



L-MTSP-22 6W
6W Onboard Dimmer



L-MSFS-20
6W Quadri-Standalone Solid Surface



L-MFSA-22
6W Quadri-Standalone



L-MTFS-22
6W Quadri Framing Shutter



L-MTZFS-22
6W Quadri-Zoom Framing Shutter

Please check product cut sheets for details - driver indications vary per product.