

## FEATURES

- Fully compatible with all MicroTrack systems
- Fully focusable 9° to 70°
- No onboard dimmer - Can dim the whole track.
- Accessories include Barndoors, Snoots, & Filter frames

## 1W ACCESSORIES



L-MTAS-10  
ANGLED SNOOT



L-MTBD-10  
BARNDOOR




L-MTFH-10  
FILTER HOLDER




L-MTBR-10  
BEAM REDUCER

**TECHNICAL DATA**

<b>Voltage</b>	12 VDC	<b>Color Finishing</b>	Black, White and Silver
<b>Led Wattage</b>	1W	<b>Working Temperature</b>	recommended 10°C to 25°C
<b>Wattage Once Used</b>	1.2W	<b>Storage Temperature</b>	recommended 22°C
<b>Input Current</b>	100mA	<b>Certificates / Standard</b>	UL, CE
<b>Beam Angles</b>	Zoomable 9 to 70°	<b>Warranty</b>	5 years
<b>Pan / Tilt</b>	355° / 90°	<b>Drivers Compatible</b>	
<b>Luminous Flux &amp; Lumens</b>	98lm @RA97 / 56 lm	<b>Lifespan</b>	IP30
<b>Color Temperatures Available</b>	3000K / 4000K / 5000K	<b>Lens</b>	CV
<b>Adapter</b>	Luxam Micro Track	<b>LED</b>	50000 hours
<b>Dimmable Options</b>	External dimming with PWM 12V track driver	<b>Class</b>	Glass
<b>CRI</b>	97 typ	<b>Rating</b>	SMD CERAMIC
<b>Weight</b>	37g	<b>Dimensions</b>	75*40*44 (mm)
<b>Main Material</b>	Aluminum	<b>Indoor Use</b>	only

**PHOTOMETRICS**

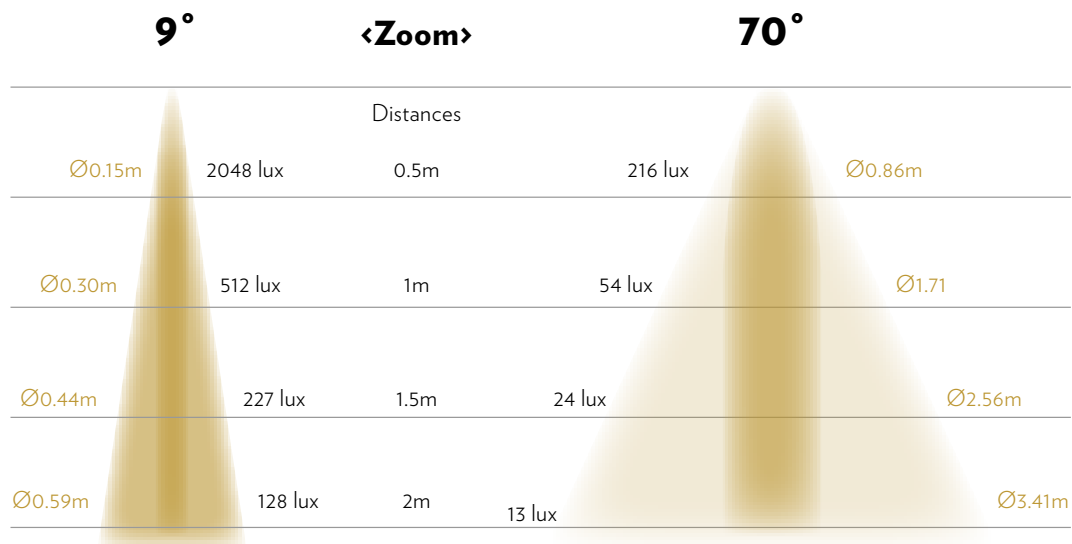

**DRIVERS COMPATIBLE**

Driver	Watts/Driver	80% Capacity	# Fixtures/Driver*	Current
LPV-100-12	100W	80W	66 Fixtures	CV
LPV-60-12	60W	48W	40 Fixtures	CV
LPV-35-12	35W	28W	21 Fixtures	CV
NPF-90-12	90W	72W	60 Fixtures	CV & CC
NPF-40-12	40W	32W	26 Fixtures	CV & CC

\*The number of fixtures per driver is calculated based on 80% capacity for safety reasons.

**VARIATIONS**



Please check product cut sheets for details - driver indications vary per product.