




**L-MTZFS-22 | 6W SPOTLIGHT
QUADRI ZOOM FRAMING SHUTTER**

PRODUCT CUTSHEET



SCAN
FOR WEBSITE

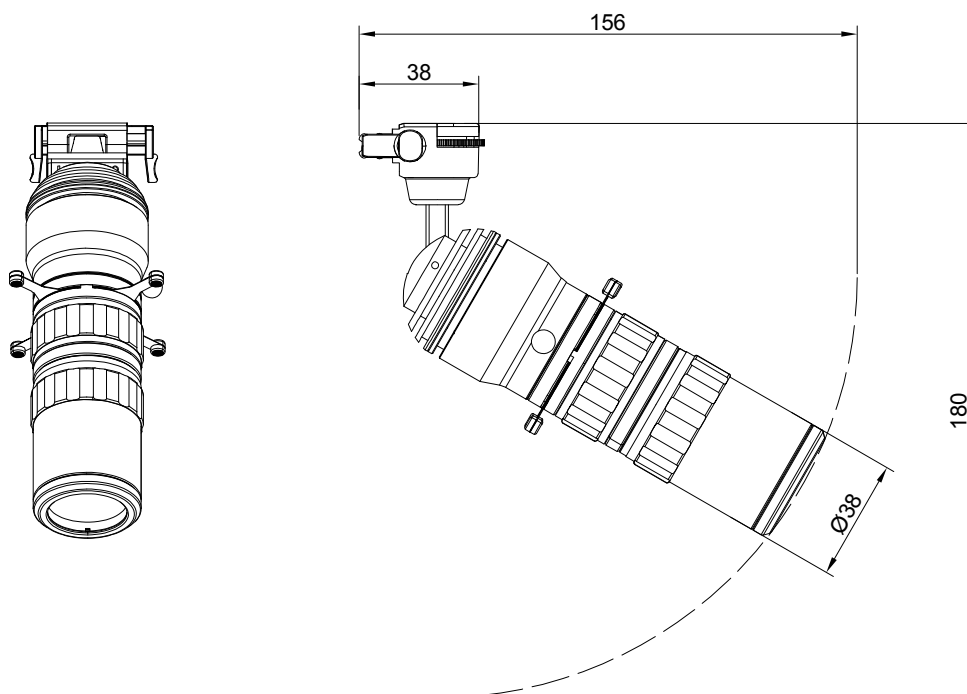

FEATURES

- Total weight: 350g
- FS weight: 215g
- Max size: 180*50*44(mm)
- (180 x 76 x 76 mm with open blades)
- Accessories including L-MTFHZQ-20 Filter 6W Holder Zoom Quadri, Gobo
 - ø37mm - filter size

6W ACCESSORIES



L-MTAS-20
ANGLED SNOOT



L-MTBD-20
BARNDOR



L-MTFH-20
FILTER HOLDER



L-MTFHZQ-20
FILTER HOLDER

TECHNICAL DATA

Voltage	11-24 VDC	Color Finishing	Black, White and Silver
LED Wattage	6W	Working Temperature	recommended 10°C to 25°C *
Wattage Once Used	7.8W	Storage Temperature	recommended 22°C
Input Current	700-330mA	Certificates / Standard	UL, CE
Beam Angles	15-36°	Warranty	5 years
Pan / Tilt	355° / 90°	Drivers Compatible	Constant Voltage
Luminous Efficiency of the LED	100lm/W @RA97 min	Lifespan	50 000 hours
Color Temperatures	3000K, 4000K, 5000K	Lens	Glass
Adapter	Luxam Micro Track	LED	SMD CERAMIC
Dimmable Options	On board Dimmer: PWM, range 0-100%	Class	III, Indoor use only
CRI	97 min	Rating	IP30
Weight	347g	Dimensions	133*75*151 (mm)
Main Material	Aluminum		



LUXAM

LIGHTING FOR MUSEUMS

PRODUCT CUTSHEET

L-MTZFS-22 |

6W SPOTLIGHT QUADRI ZOOM FRAMING SHUTTER

PHOTOMETRICS


15°

Distance (m)		Circle diameter / Square side
0.5m	11256 lux	Ø132mm / 93mm
1m	2814 lux	Ø263mm / 186mm
1.5m	1251 lux	Ø395mm / 279mm
2m	704 lux	Ø527mm / 372mm
2.5m	450 lux	Ø658mm / 466mm

36°

Distance (m)		Circle diameter / Square side
0.5m	2776 lux	Ø325mm / 230mm
1m	694 lux	Ø650mm / 460mm
1.5m	308 lux	Ø975mm / 689mm
2m	174 lux	Ø1300mm / 919mm
2.5m	111 lux	Ø1625mm / 1149mm


6W Spotlights can transform into Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights - with one body you can have either a spotlight or a framing shutter spotlight.

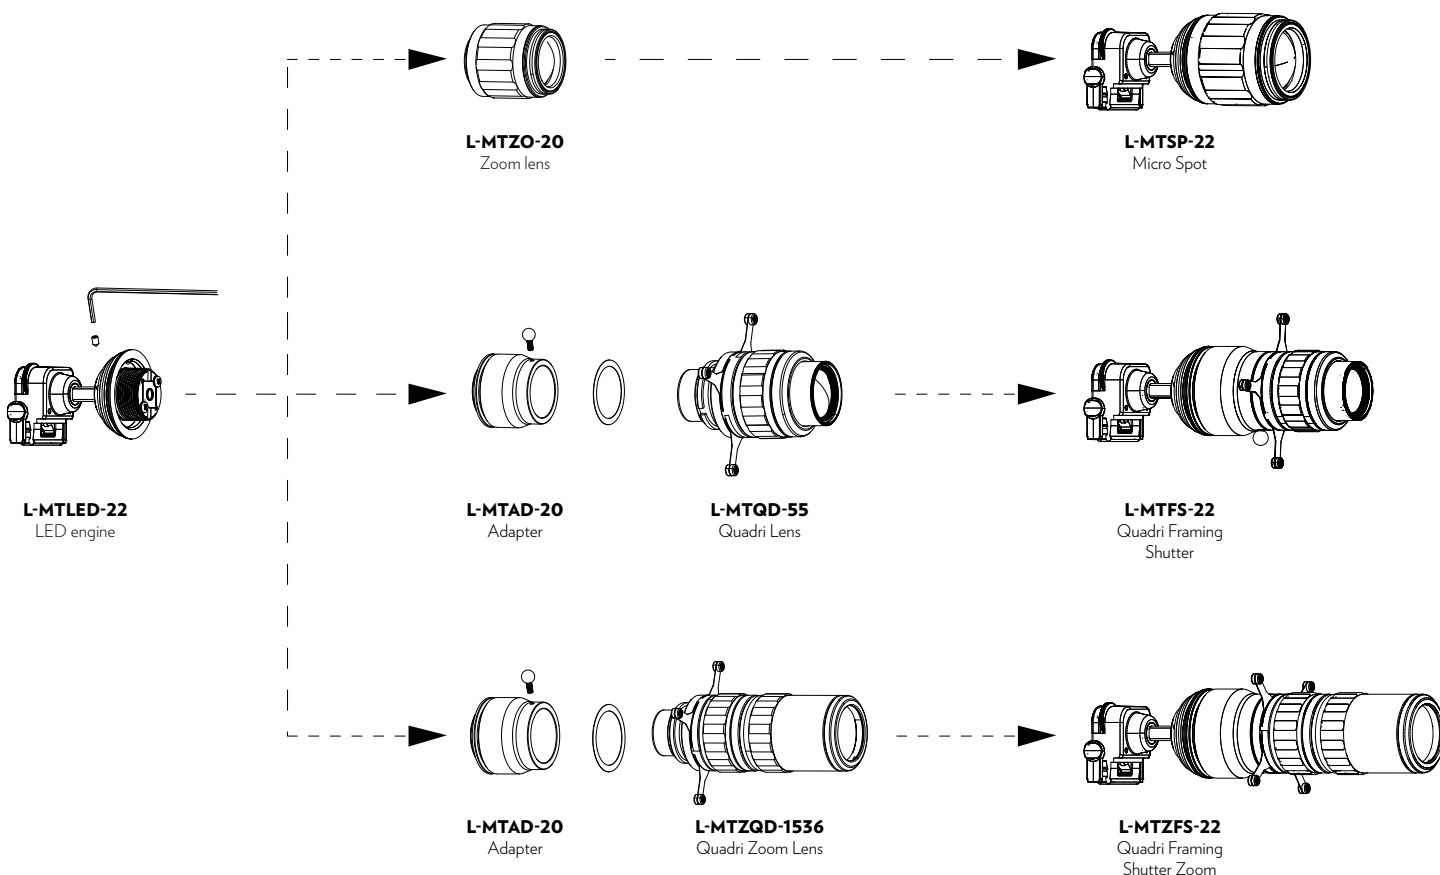

GOBO DETAILS

A gobo adds depth and texture to your setup. The L-MTZFS-22 6W Quadri Zoom Framing Shutter accepts 19.7mm outer diameter, 14.5mm inner diameter, 0.3mm-1mm thick glass or stainless steel gobos, including full color glass and plastic options.

LENS CODES: L-MTZQ-1536 and L-MTQD-55

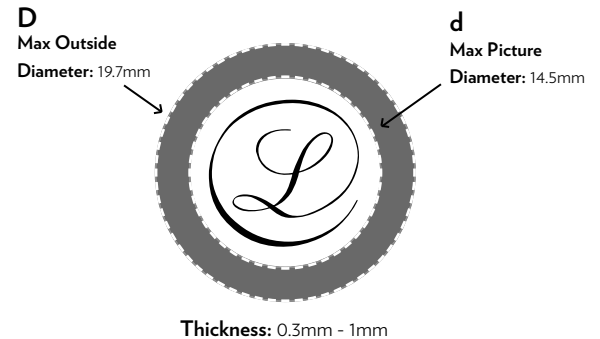

DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
LPV-60-24		1 - 6	
LPV-100-24		1 - 11	
LPV-150-24		1 - 18	

SCREW SIZES Focus and Articulation: 1.5mm

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.