





L-MSPS-20
6W SPOTLIGHT
PRODUCT CUTSHEET

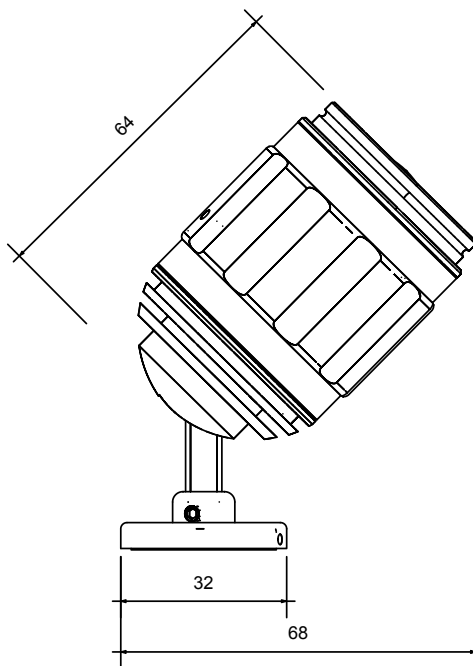

SCAN
FOR WEBSITE

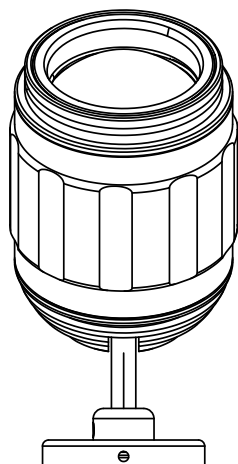

FEATURES

- Fully focusable 8° to 55°
- Can add dimmer to the driver
- Accepts all 6W accessories
- Magnet base option available

No tools are needed for mounting and focusing the fixtures*

*to lock the rotation axes and focus point 1.5mm and 0.9mm HEX drivers are required.

6W ACCESSORIES



L-MTAS-20
ANGLED
SNOOT



L-MTBD-20
BARNDOR




L-MTFH-20
FILTER HOLDER

TECHNICAL DATA


Led Wattage	6W	Color Finishing	Black, White and Silver
Wattage Once Used	6W	Storage Temperature	recommended 22°C
Input Current	165mA	Certificates / Standard	UL, CE
Beam Angles	Zoomable 8° to 55°	Warranty	5 years
Pan / Tilt	355° / 90°	Drivers Compatible	Constant Current
Luminous Efficiency of the LED	100lm/W @RA97 min	Lifespan	50 000 hours
Color Temperatures	3000K, 4000K, 5000K	Lens	Glass
Adapter	Surface mount	LED	SMD CERAMIC
Dimmable Options	Dimmable with PWM driver	Class	III, Indoor use only
CRI	97 min	Rating	IP30
Weight	172g	Dimensions	75*45*92 (mm)
Main Material	Aluminum	Lenght of Tail	145cm

PHOTOMETRICS

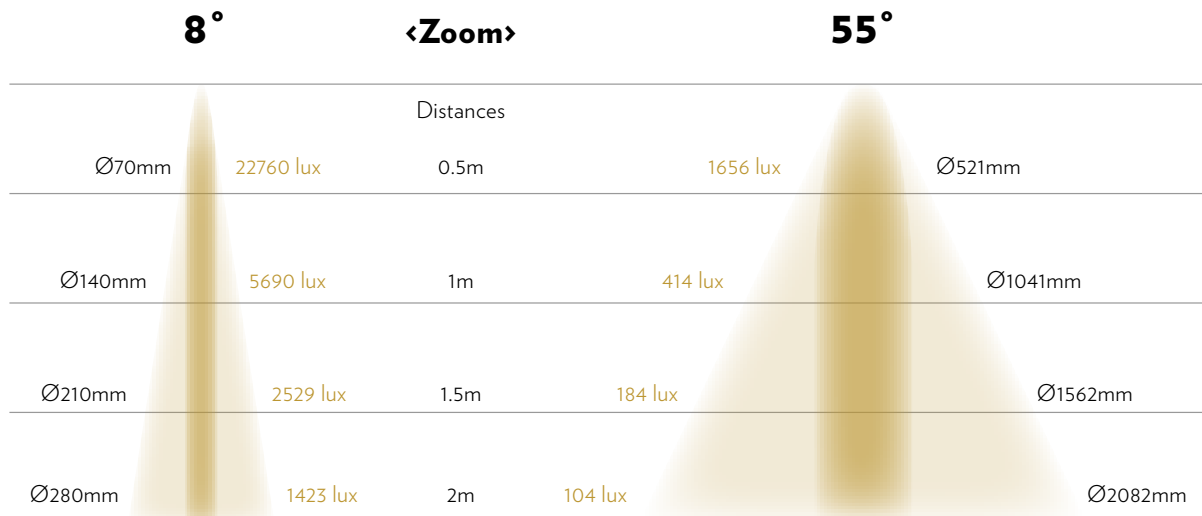



6W Spotlights can transform into Zoom Spotlights, Quadri-Framing Shutter Spotlights, and Quadri Zoom Framing-Shutter Spotlights - with one body you can have either a spotlight or a framing shutter spotlight.

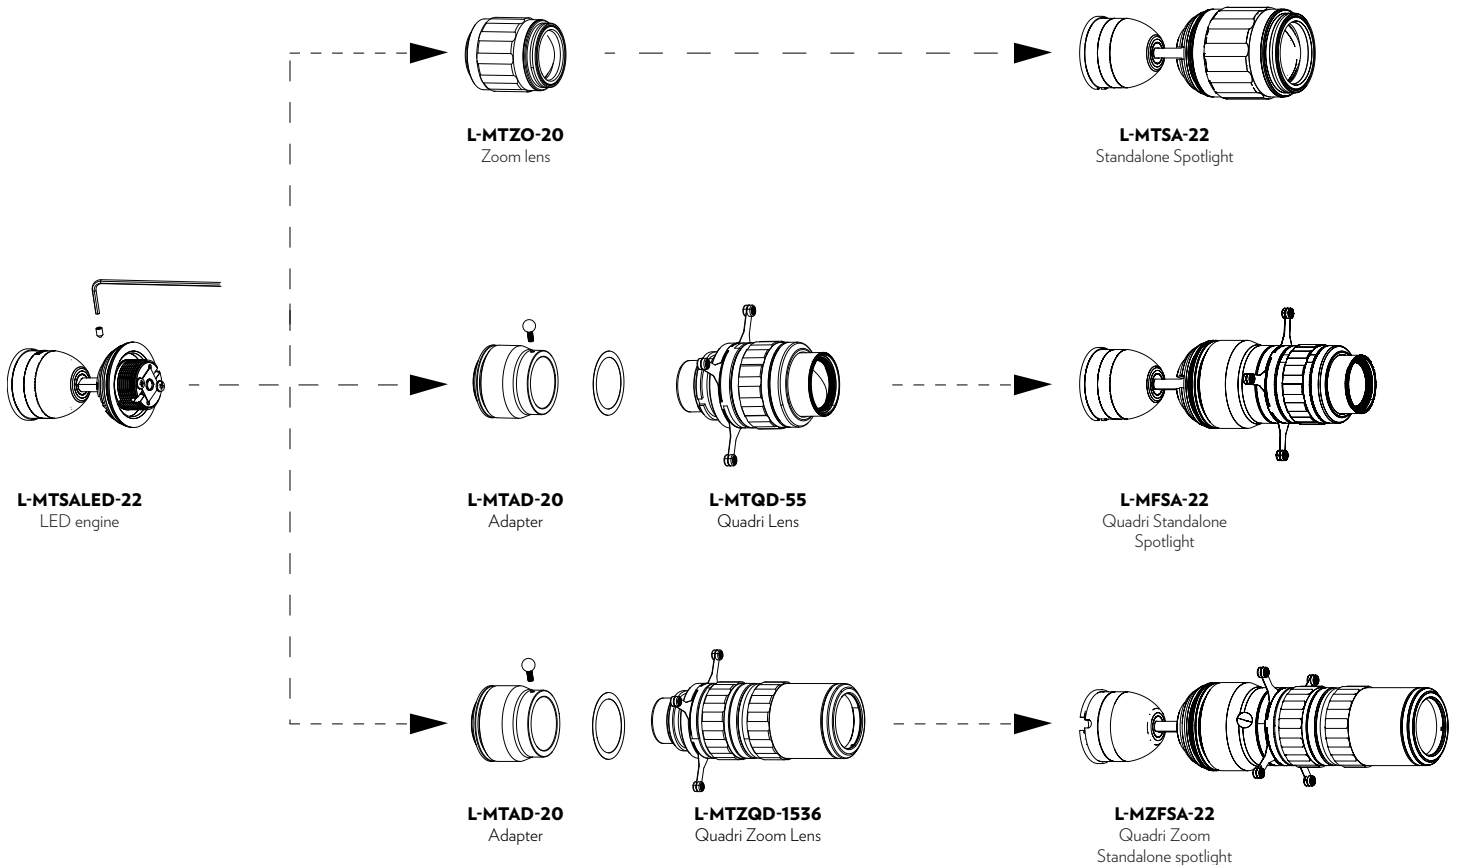

DRIVERS COMPATIBLE

Driver	Short Description	Nbr of Fixtures	Setting
SE-20-100-700-W1A	Constant Current driver with 0-10V control, 20W, 1 channel	1 - 1	165mA (9-42V)
OT 12W UNV 0A3 DUALDIM DIM-1 F	Constant Current driver with 0-10V control, 12W, 1 channel	1 - 1	165mA (26-42V)
DMX-25-150-900-U1P1	Constant Current driver with manual/DMX control, 25W 1 channel	1 - 1	150mA (10-54V)
L-CT-DMX/RDM-6W-6CH	Constant Current driver with manual/DMX control, 6W x 6 channels*	1 per channel	165mA (35.4V)
SOLOdrive 12W/S SL12S-M1Z1A1 (folded 12W 0-10V)	Constant current driver with 0-10V control, 12W, 1 channel	1 - 1	165mA (2-42V)

*To use with 6W L-MS...-20 spotlights only

VARIATIONS



Please check product cut sheets for details - driver indications vary per product.